


Manitowoc® **ICE MACHINES**

**Series
G200**

SERVICE MANUAL

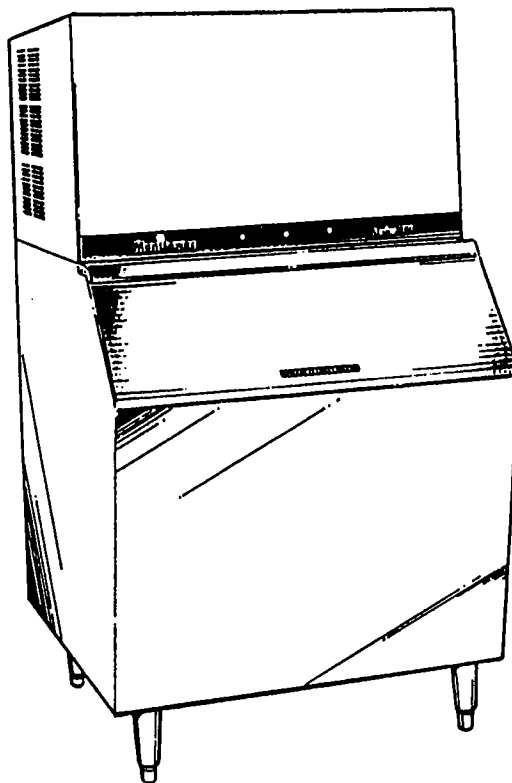

G6SVCVR

This product qualifies for the following listings:



We reserve the right to make product improvements at any time. Specifications and design are subject to change without notice.



Part No. 80-0842-3
Rev 1 (8-92)

TABLE OF CONTENTS

GENERAL SPECIFICATIONS	1
WARRANTY INFORMATION	2
DIMENSIONS	4
COMPONENT IDENTIFICATION	6
Water Distribution Group and Outer Panels	6
Control Box Assemblies	7
Compressor Compartment (Air-Cooled)	8
Compressor Compartment (Water-Cooled)	9
INTERIOR CLEANING	10
Removal of Parts for Cleaning	10
Remove Water Pump	10
Remove Float Valve	11
Remove Distribution Tube	11
Disassemble Distribution Tube	11
Remove Ice Thickness Probe	12
Remove Water Trough	12
Cleaning Procedures	12
Cleaning the Evaporator Surface	13
SANITIZING	14
CHECKING AND CLEANING THE WATER DUMP VALVE	14
Operation Check	14
Remove Water Dump Valve	15
Disassemble Water Dump Valve	15
Cleaning Water Dump Valve	15
SEQUENCE OF OPERATION	16
Freeze Cycle (Prechill of Evaporator)	16
Freeze Cycle	18
Harvest Cycle	20
Automatic Shut-Off (Full Bin of Ice)	22
SERVICE DIAGNOSTIC CHART	23
COMPONENT FUNCTION, SPECIFICATIONS AND CHECK PROCEDURES	25
Bin Switch	25
Fan Cycle Control (Air-Cooled Models)	25
Float Valve	26
High Pressure Cut-Out Control — H.P.C.O.	26
Ice Thickness Probe	27
ICE/OFF/WATER PUMP Toggle Switch	27
Water Curtain	28
Water Pump	28
7-Second Off Delay Relay	29
Water Pump Delay Timer	30
DIAGNOSING ELECTRONIC CONTROL CIRCUITRY	31
Unitized Sensor Board	31
Ice Machine Will Not Go Into Harvest	31
Ice Machine Prematurely Goes Into Harvest without Ice Formation	32

DIAGNOSING COMPRESSOR AND START COMPONENTS ELECTRICALLY	33
REFRIGERATION AND OTHER NON-ELECTRICAL PROBLEMS	35
Introduction to the Six-Step Diagnostic Procedure	35
Step 1 — Visual Inspection	36
Step 2 — Ice Production	37
Step 3 — Ice Fill Pattern	38
Step 4 — Water System	38
Step 5 — Refrigeration	39
Step 6 — Final Analysis	45
HOW TO USE MANIFOLD GAUGES	47
TXV INSTALLATION	48
ALCO REFRIGERATION SOLENOID VALVE REPLACEMENTS	49
LEAK CHECKING CONDENSER AND WATER REGULATING VALVE	50
REMOVAL FROM SERVICE/WINTERIZATION	51
EVACUATION AND RECHARGING	52
SEVERE SYSTEM CONTAMINATION	54
General	54
Determining Severity of Contamination and Clean-Up Procedures	54
Mild System Contamination Clean-Up Procedures	55
Severe System Contamination Clean-Up Procedures	55

MANITOWOC ICE, INC.

2110 South 26th Street P.O. Box 1720 Manitowoc, WI 54221-1720

Phone: (920) 682-0161

Fax: (920) 683-7585

Web Site: www.manitowocice.com

GENERAL SPECIFICATIONS

This section is not intended to be a guideline to install the ice machine. Refer to Installation Manual for installation procedures.

Ambient Air Temperature: 35°F minimum, 110°F maximum (minimum five-inch clearance rear and sides)

Ice Making Water Supply:

Pressure — 20 psig minimum, 80 psig maximum

Supply Line — 3/8 inch FPT

Drain Line — 3/4 inch FPT

Water Temperature — 33°F minimum, 90°F maximum

Water-Cooled Condenser Water Supply:

Water Regulating Valve Setting — 225 psig $\pm$ 5 (Factory preset)

Pressure — 20 psig minimum, 150 psig maximum

Supply Line — 1/2 inch up to the 3/8" FPT connection

Drain Line — 1/2 inch FPT

Temperature — 33°F minimum, 90° maximum

Heat of Rejection (BTU/Hr):

Average 4,500, Peak 5,700

Refrigerant R502:

Air-Cooled — 20 oz.

Water-Cooled — 12 oz.

ELECTRICAL REQUIREMENTS

Voltage Phase Cycle	AIR		WATER	
	Maximum Fuse/Circuit Breaker	Minimum Circuit Ampacity	Maximum Fuse/Circuit Breaker	Minimum Circuit Ampacity
115/1/60	20	11.5	15	9.8
208-230/1/60	15	4.7	15	3.9
220-240/1/50	15	5.2	15	4.1
Numbers Listed Are Amps				

MANITOWOC ICE MACHINES ARE AIR CONDITIONING REFRIGERATION INSTITUTE (ARI) CERTIFIED AND RATED IN ACCORDANCE WITH AIR CONDITIONING REFRIGERATION INSTITUTE STANDARD 810-87

NOTE

Test conditions for standard ratings at 90°F air, 70°F water, and 30 $\pm$ 2 psig water inlet pressure.

Model Designation	Capacity (Lb. per 24 Hr.)	Potable Water Used (Gal. per 100 Lb. of Ice)	Condenser Water Used (Gal. per 100 Lb. of Ice)	Power Input (kW/Hr. 100 Lb. of Ice)
GR0200A	172	40	--	10.2
GR0201W	181	40	174	8.4
GD0202A	185	40	--	9.5
GD0203W	195	40	174	7.8
GY0204A	185	40	--	9.5
GY0205W	195	40	174	7.8

WARRANTY INFORMATION

IMPORTANT

Read this section very carefully for warranty explanation. (Refer to Warranty Bond for complete details.)

OWNER WARRANTY REGISTRATION CARD

Warranty coverage begins the day the ice machine is installed.

IMPORTANT

To validate the installation date, the OWNER WARRANTY REGISTRATION CARD must be mailed in.

If the card was not returned, Manitowoc will use the date of sale to the Manitowoc Distributor as the first day of warranty coverage for your new ice machine.

About Your Warranty

Contact your local Manitowoc representative or our Wisconsin factory for further warranty information.

WARRANTY COVERAGE

(Effective for Ice Machines Installed after January 1, 1991)

Parts

1. The ice machine is warranted against defects in materials and workmanship under normal use and service for three (3) years from the date of the original installation. It is important to send in the warranty registration card so Manitowoc can begin your warranty on the installation date.
2. An additional two (2) years (five years total) warranty is provided on evaporator and compressor from the date of original installation.

Labor

1. Labor to repair or replace defective components is warranted for three (3) years from the date of original installation.
2. An additional two (2) years (**five (5) years total**) labor warranty is provided on the evaporator from the date of original installation.

Exclusions from Warranty Coverage

The following items are not included in the warranty coverage of the ice machine.

1. Normal maintenance, adjustments and cleaning as outlined in the Use and Care Guide.
2. Repairs due to unauthorized modifications to the ice machine or the use of nonapproved parts without written approval from Manitowoc Ice, Inc.
3. Damage from improper installation as outlined in the Installation Instructions, improper electrical supply, water supply or drainage; flood, storms, or other acts of God.
4. Premium labor rates due to holidays, overtime, etc. Travel time, flat rate service call charges, mileage and miscellaneous tools and material charges not listed on the payment schedule are excluded as well as additional labor charges resulting from inaccessibility of the ice machine.
5. Parts or assemblies subjected to misuse, abuse, neglect or accidents.
6. When the ice machine has been installed, cleaned and/or maintained inconsistent with the technical instructions provided in the Owner/Operator Use and Care Guide and the Installation Manual.

Authorized Warranty Service

To comply with the provisions of the warranty a refrigeration service company qualified and authorized by a Manitowoc distributor or a Contracted Service Representative must perform the warranty repair.

Please contact your local Manitowoc Distributor or Manitowoc Ice, Inc. for further information regarding warranty coverage. (NOTE: Have model and serial numbers of ice machine available when calling. See Figure 1 for location of model and serial numbers.)


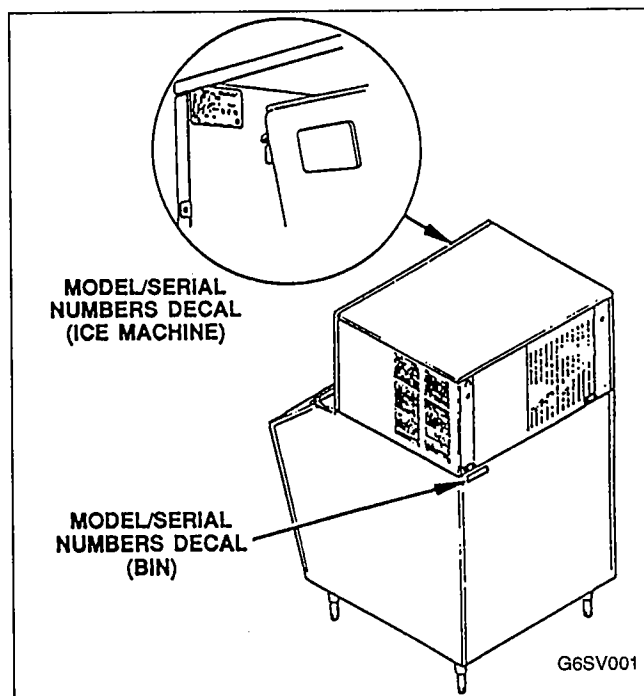



FIGURE 1. MODEL/SERIAL NUMBERS LOCATION

DIMENSIONS

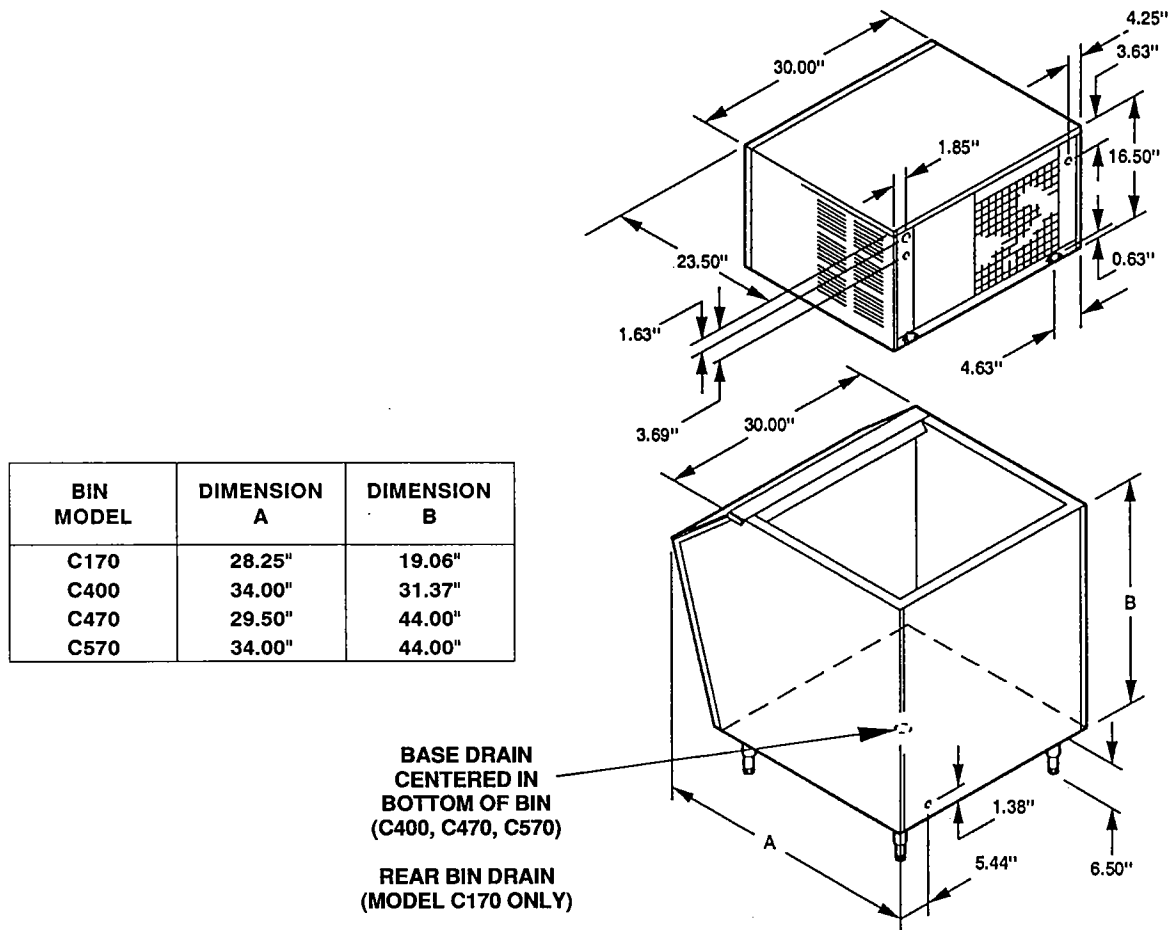

G2SV002


FIGURE 2. DIMENSIONS

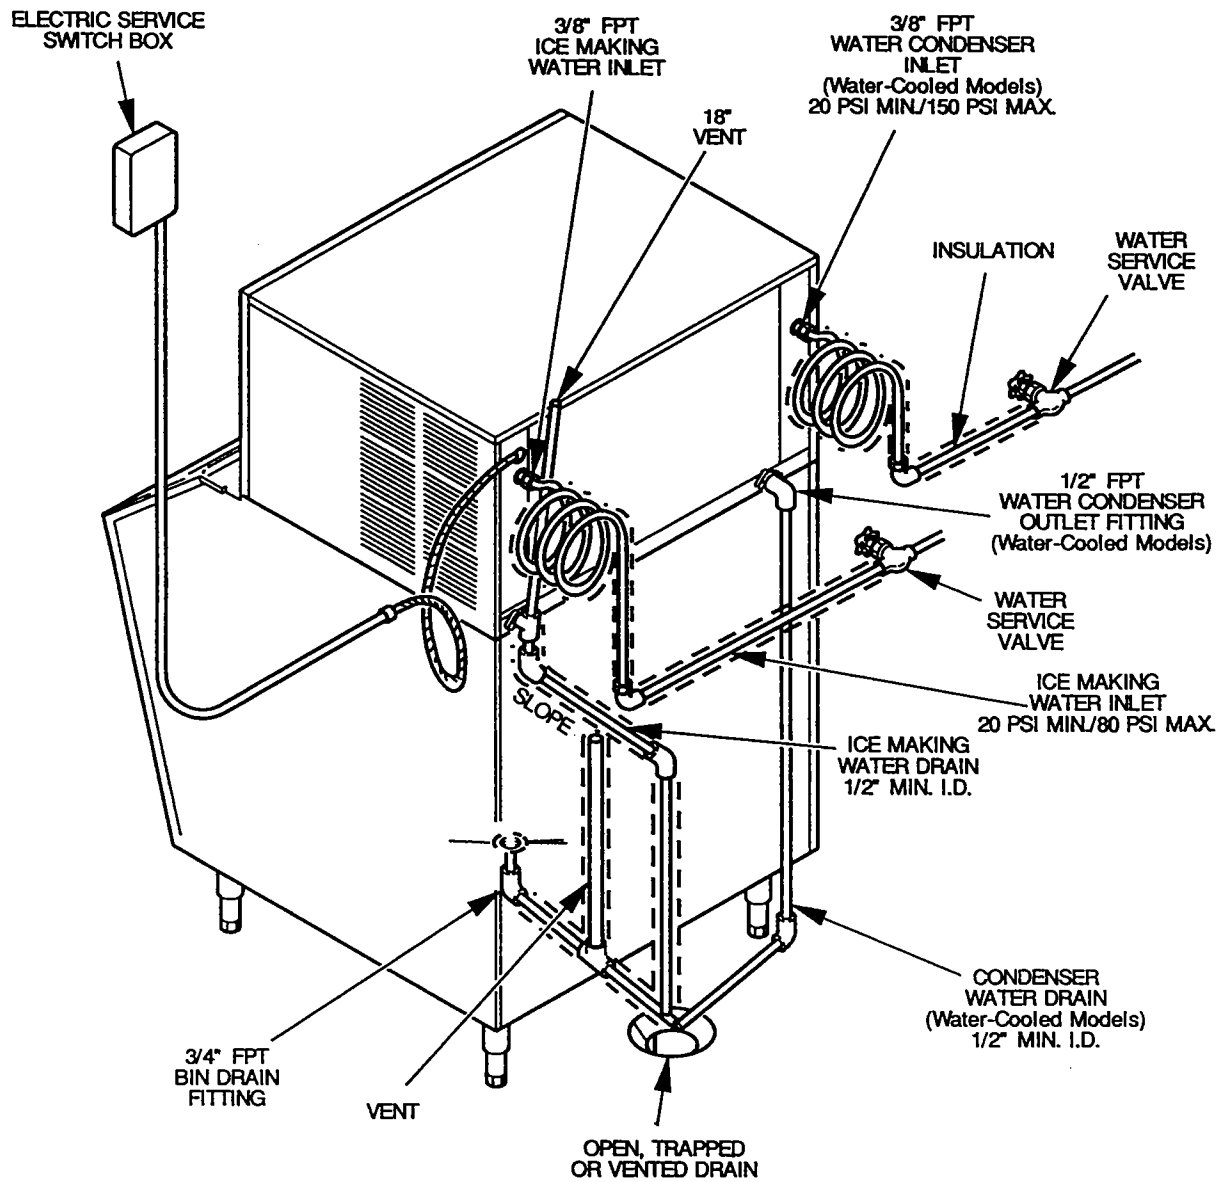

G2SV003

FIGURE 3. TYPICAL INSTALLATION

COMPONENT IDENTIFICATION

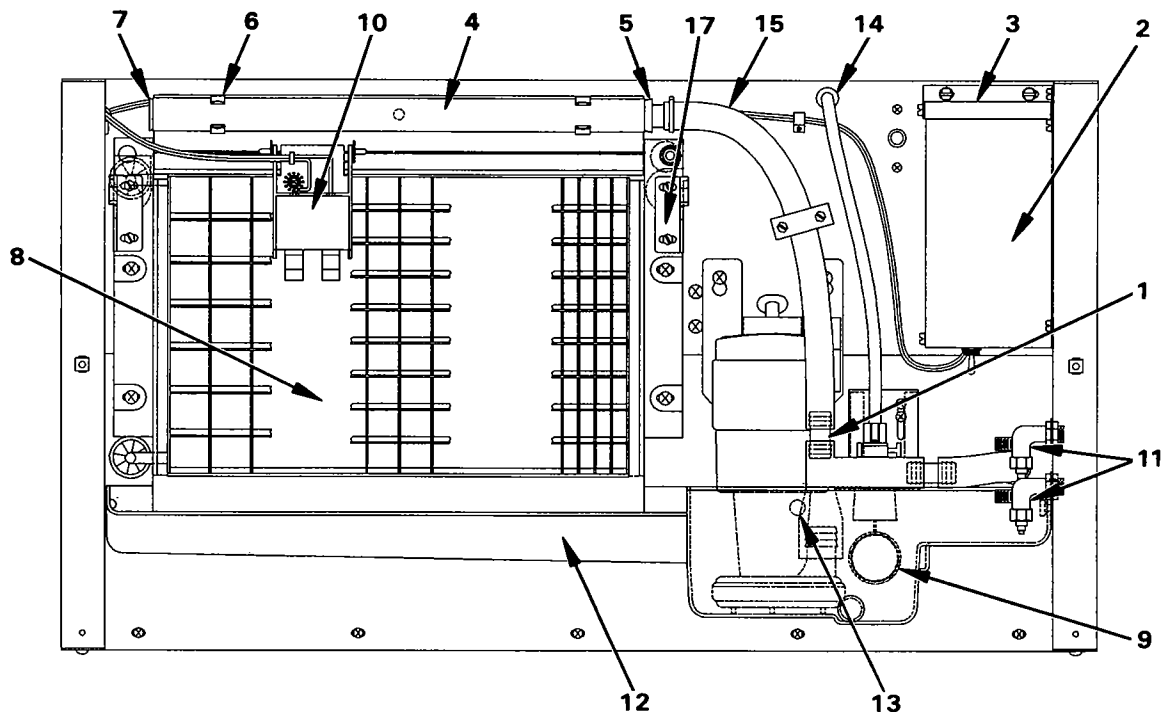


- | | |
|----------------------------------|-------------------------------------|
| 1. BARBED TEE | 10. ICE THICKNESS CONTROL |
| 2. CONTROL BOX COVER | 11. SERVICE VALVE |
| 3. CONTROL BOX TOP COVER | 12. SUMP TROUGH |
| 4. DISTRIBUTION TUBE | 13. THUMB SCREW |
| 5. DISTRIBUTION TUBE SEAL | 14. TUBING, 1/4" POLYFLOW |
| 6. DISTRIBUTION TUBE SPRING CLIP | 15. TYGON TUBING, 1/2" ID x 3/4" OD |
| 7. END PLUG | 16. WATER CURTAIN (NOT SHOWN) |
| 8. EVAPORATOR ASSEMBLY | 17. WATER CURTAIN HANGERS |
| 9. FLOAT VALVE ASSEMBLY | |

SV1150

FIGURE 4. WATER DISTRIBUTION GROUP AND OUTER PANELS


FRONT CONTROL BOX

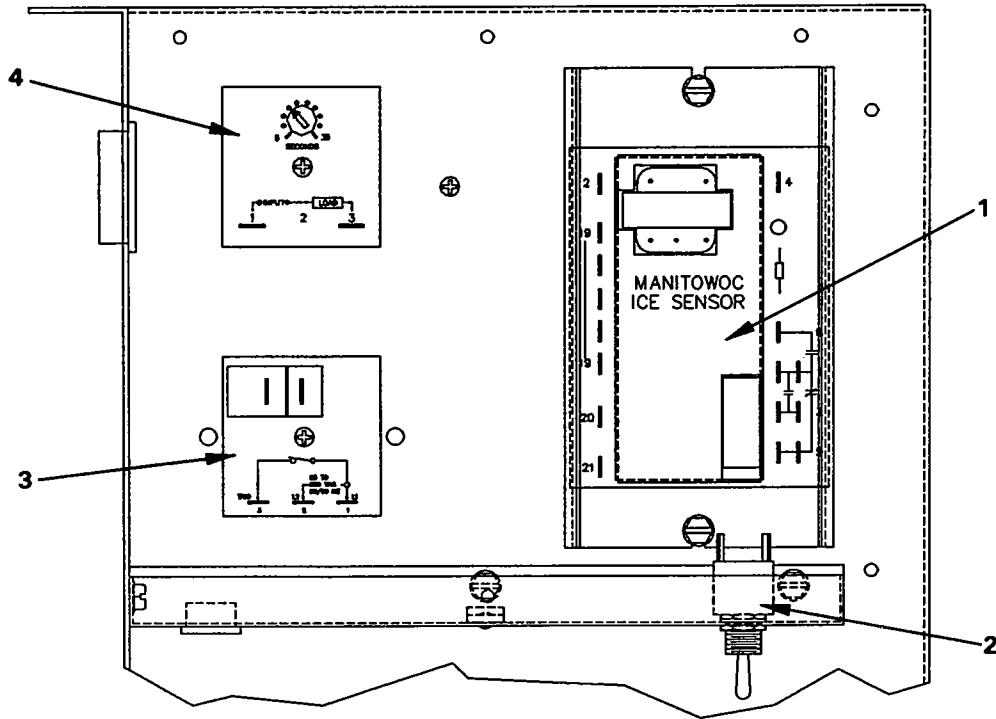

1. ICE SENSOR
2. TOGGLE SWITCH
3. 7-SECOND OFF DELAY RELAY
4. WATER PUMP DELAY TIMER

SV1149


SIDE CONTROL BOX

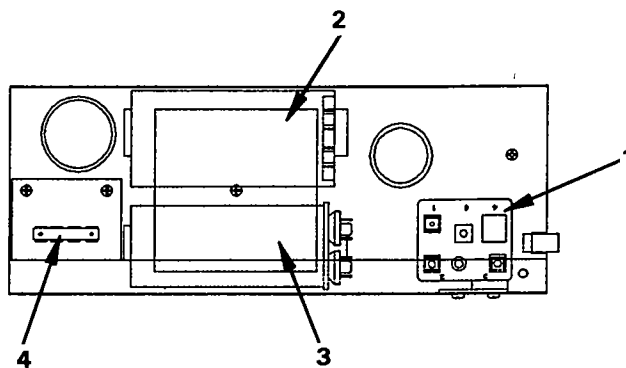

1. START RELAY
2. START CAPACITOR
3. RUN CAPACITOR
4. TERMINAL STRIP

SV1152


FIGURE 5. CONTROL BOX ASSEMBLIES

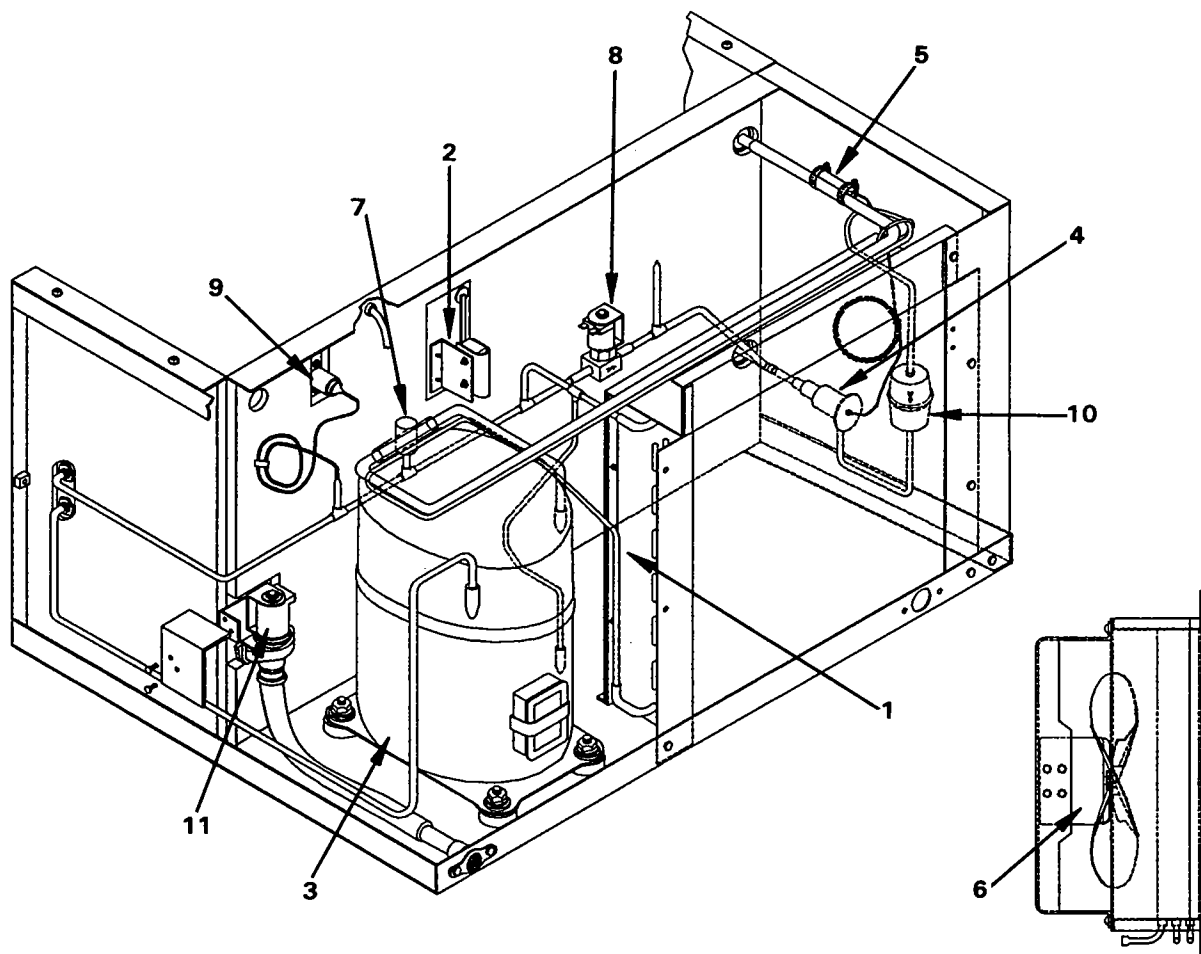

1. AIR CONDENSER
2. BIN SWITCH
3. COMPRESSOR
4. EXPANSION VALVE
5. EXPANSION VALVE BULB
6. FAN
7. FAN CYCLING CONTROL
8. HOT GAS SOLENOID
9. HIGH PRESSURE CUT-OUT
10. DRIER
11. WATER DUMP SOLENOID

SV1151

FIGURE 6. COMPRESSOR COMPARTMENT (AIR-COOLED)

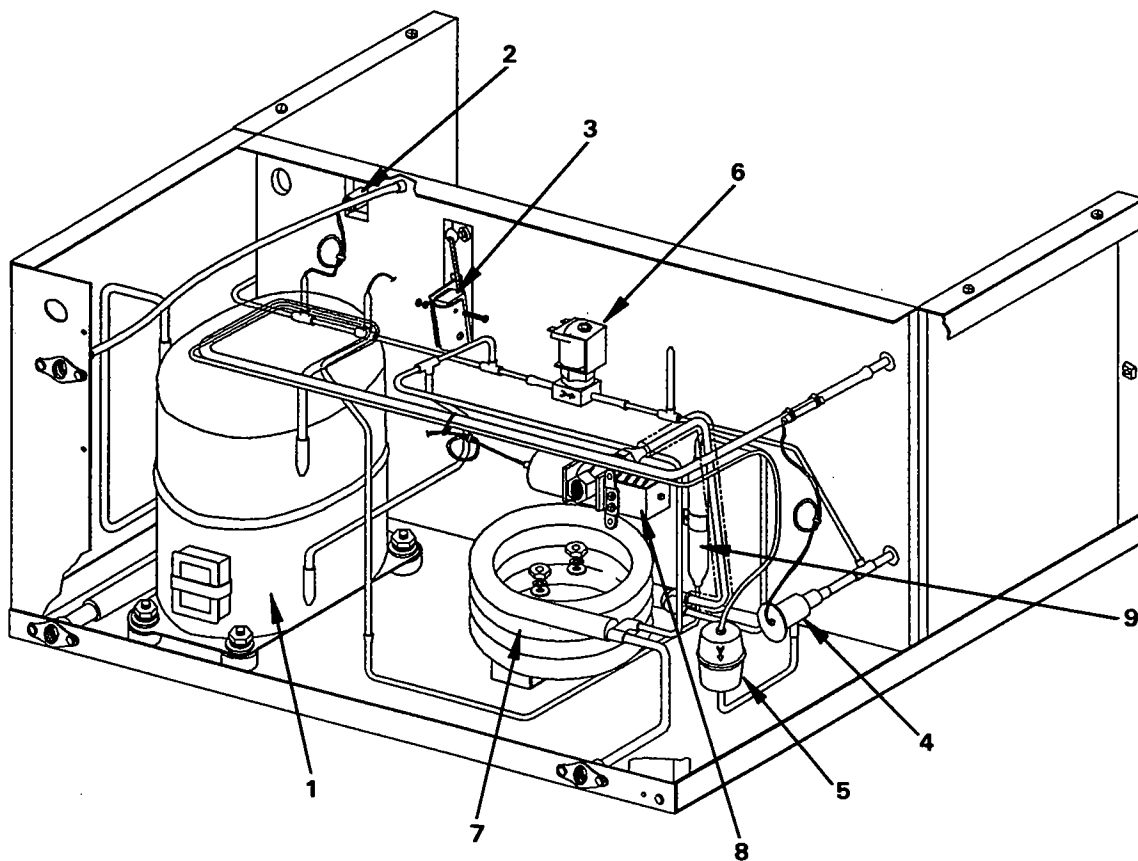

- 1. COMPRESSOR
- 2. HIGH PRESSURE CUT-OUT
- 3. BIN SWITCH
- 4. EXPANSION VALVE
- 5. DRIER

- 6. HOT GAS SOLENOID
- 7. WATER-COOLED CONDENSER
- 8. WATER REGULATING VALVE
- 9. RECEIVER

SV1152

FIGURE 7. COMPRESSOR COMPARTMENT (WATER-COOLED)

INTERIOR CLEANING

For efficient operation, clean and sanitize ice machine every six months.

IMPORTANT

Do not use hot water. If ice machine requires cleaning and sanitizing more frequently, consult a qualified service company to test the water quality and recommend appropriate water treatment.

Before cleaning, check water dump valve for proper operation (see Cleaning Water Dump Valve, page 14). Deposits may accumulate in the valve causing leakage or restriction of water flow.

REMOVAL OF PARTS FOR CLEANING

1. Loosen two screws holding front panel in place and remove front panel.
2. Set ICE/OFF/WATER PUMP switch at OFF after ice falls from evaporator at completion of harvest cycle, or set switch at OFF and allow ice to melt off evaporator.



CAUTION

Never use any type of object to force ice from evaporator as damage may result.

3. Turn off water to the ice machine at water service valve(s).



WARNING

Disconnect electric power to ice machine at the electric switch box before proceeding.

4. Stacked ice machines:
 - a. Remove top panel.
 - b. Lift ice chute up and out of ice machine.

5. Remove all ice from bin.
6. Remove water curtain.
7. Remove drain plug from water trough and allow water to drain into bin.

REMOVE WATER PUMP (Figure 8)

1. Disconnect water pump power cord.

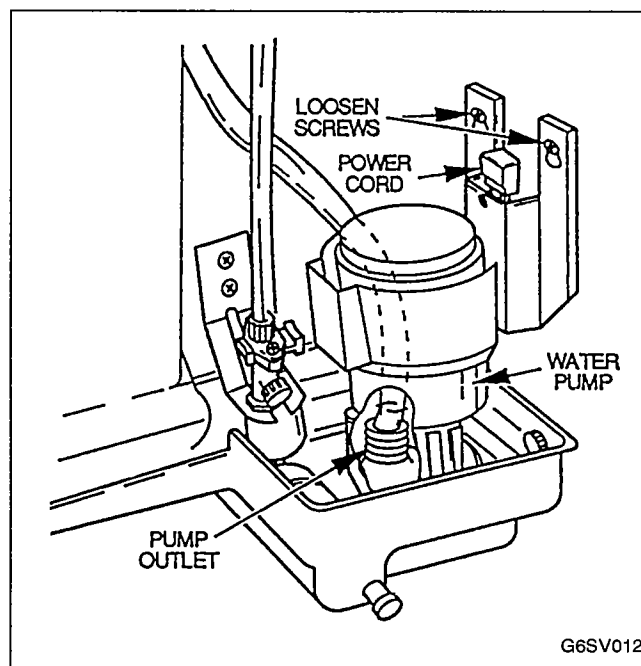


FIGURE 8. WATER PUMP REMOVAL

2. Disconnect hose from pump outlet.
3. Remove two screws holding pump mounting bracket to rear bulkhead.
4. Lift pump and bracket assembly off screws.

REMOVE FLOAT VALVE (Figure 9)

1. Turn valve splash shield clockwise a full turn or two, then pull the valve forward off the mounting bracket.
2. Disconnect the water inlet tube from the float valve at the compression fitting.
3. Remove filter screen and cap.

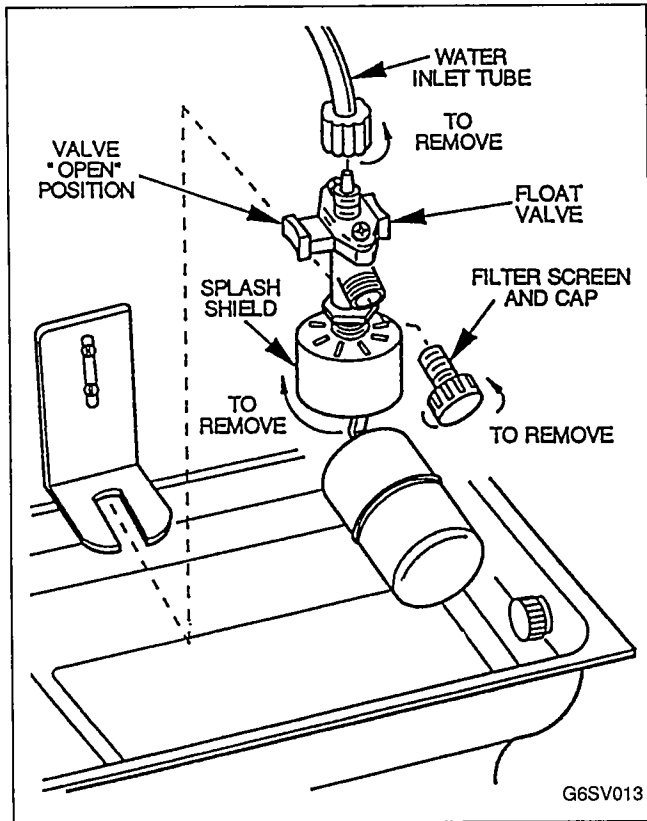


FIGURE 9. FLOAT VALVE REMOVAL

REMOVE DISTRIBUTION TUBE (Figure 10)

1. Remove distribution tube from the two spring clips holding it in place.
2. Disconnect the hose from the distribution tube and from the "T".

NOTE

To reinstall distribution tube, align locating pin on top extrusion with hole in distribution tube.

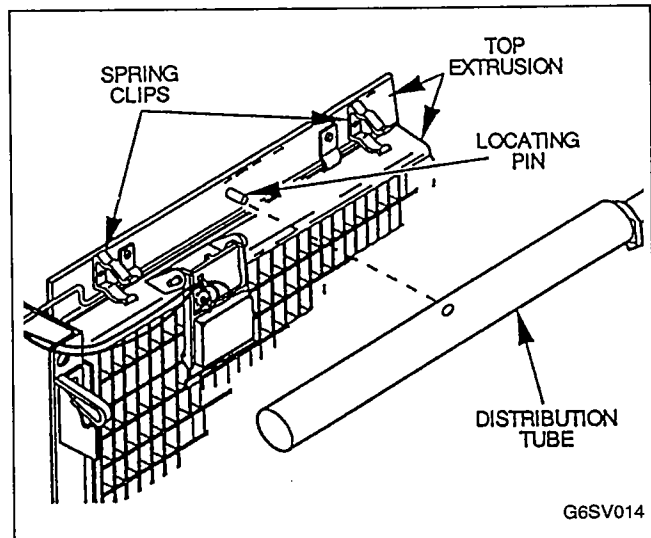


FIGURE 10. DISTRIBUTION TUBE REMOVAL

DISASSEMBLE DISTRIBUTION TUBE (Figure 11)

NOTE

Disassembly of the distribution tube is not usually necessary as normal cleaning of the ice machine will clean the tube. The distribution tube should only be disassembled if, after normal cleaning procedures, there is inadequate water flow from the distribution tube. (Ensure that any other water problems are eliminated beforehand.)

1. Heat rubber end plugs on distribution tube in warm water to soften them.
2. Remove end plugs and inner distribution tube.
3. Reheat rubber plugs in warm water after cleaning is complete and reassemble distribution tube.

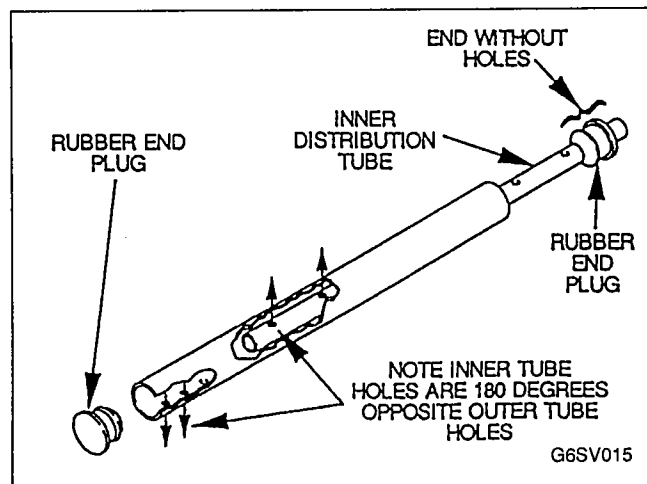


FIGURE 11. DISTRIBUTION TUBE DISASSEMBLY

NOTE

Position the holes in the inner and outer tubes 180° opposite each other when reassembling. The end of the inner distribution tube without holes must extend from the outer tube when reassembled to allow for attachment of the water line from the pump.

REMOVE ICE THICKNESS PROBE (Figure 12)

⚠ WARNING

Disconnect electric power to ice machine at the electric service switch box before proceeding.

1. Disconnect wire leads from inside electrical control box.
2. Compress side of probe at top near hinge pin and disengage it from the bracket.

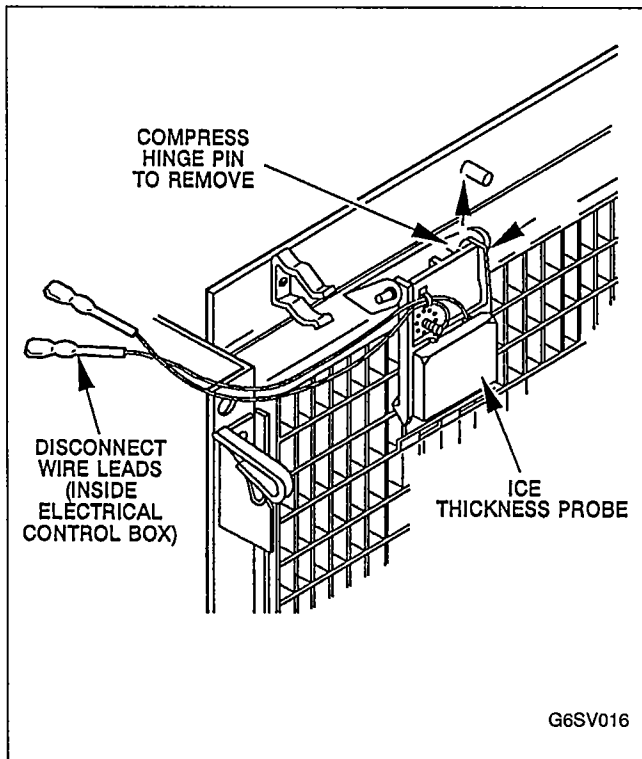


FIGURE 12. ICE THICKNESS PROBE REMOVAL

REMOVE WATER TROUGH (Figure 13)

1. Remove thumb screws. Support trough while removing thumb screws.
2. Lower right side of trough into bin while disengaging left side of trough from holding pegs and remove trough from ice machine.

NOTE

Stacked ice machines: Remove trough from top ice machine by lifting up on front right side of trough, then pull out to disengage trough from pegs on left side of cabinet.

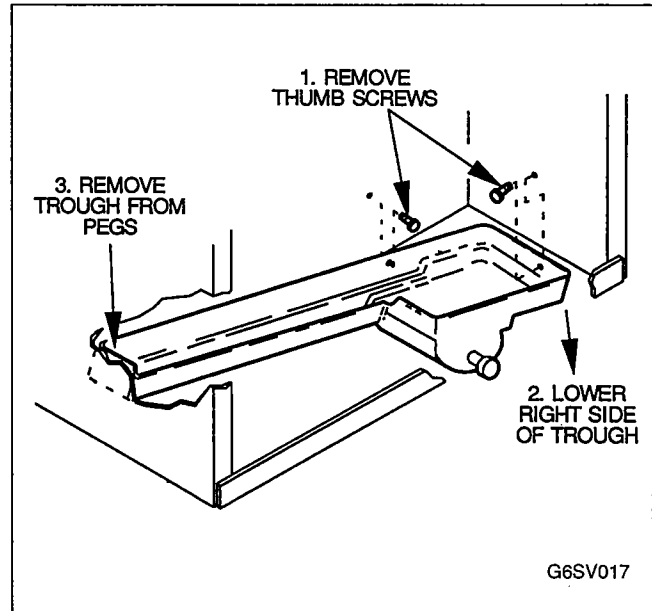


FIGURE 13. WATER TROUGH REMOVAL

CLEANING PROCEDURES

Ice Machine Cleaner is for removal of lime scale or other mineral deposits. It is not used for removal of algae or slime. Refer to Sanitizing for removal of algae and slime.

⚠ CAUTION

Use only Manitowoc Ice Machine Cleaner, Part No. 94-0546-3, in recommended concentration as this is compatible with materials used in the manufacture of Manitowoc Ice Machines.

1. Soak parts in a solution of no more than 16 ounces of cleaner to one gallon of warm water. Use a brush (**DO NOT USE A WIRE BRUSH**) or a sponge to clean the parts, taking care not to damage them.

⚠ CAUTION

Do not immerse the water pump motor in the cleaning solution. Also, use care when cleaning the ice thickness probe so as not to move the adjusting screw.

2. Use the cleaning solution and a brush or sponge to remove scale build-up from the top, sides and bottom extrusions, the inside of the ice machine panels, and the entire inside of the ice bin.

A dirty top extrusion, Figure 10, could result in uneven water flow over the evaporator. Ensure all scale and dirt are removed.

3. Thoroughly rinse with clean water all parts and surfaces washed with the cleaning solution.

NOTE

Incomplete rinsing of the ice thickness probe could leave residue which could cause the ice machine to go into premature harvest. For best results, brush or wipe off while rinsing and then wipe dry.

4. Reinstall all parts removed for cleaning except front panel and top chute (if stacked).

CLEAN THE EVAPORATOR SURFACE

NOTE

Failure to clean other parts prior to evaporator may result in poor cleaning of the evaporator surface.

1. Turn on water to ice machine at water service valve and verify float valve is open, Figure 26.
2. Allow trough to fill to proper operating level, Figure 26.

3. Set ICE/OFF/WATER PUMP switch at WATER PUMP.

4. Add two ounces of cleaner to water trough and allow solution to circulate a maximum of 10 minutes.

NOTE

Use a soft brush on excessively dirty evaporator to help remove deposits. Ensure connecting holes in back corners of cube molds are open.

5. Set ICE/OFF/WATER PUMP switch at OFF.
6. Shut off water at float valve. See Figure 9.
7. Drain water trough by removing drain plug.
8. Thoroughly rinse trough with clean water, then reinstall drain plug.
9. Turn on water at float valve.
10. Set ICE/OFF/WATER PUMP switch at WATER PUMP and allow water trough to fill to proper operating level.
11. Sanitize ice machine after cleaning.
12. Perform Operational Checks. Refer to Owner/Operator Use and Care Guide.

SANITIZING

Sanitizer is used for removal of algae or slime AND AFTER USE OF MANITOWOC ICE MACHINE CLEANER. It is not used for removal of lime scale or other mineral deposits.

1. Loosen two screws holding front panel in place and remove front panel.
2. Set ICE/OFF/WATER PUMP switch at OFF after ice falls from evaporator at completion of harvest cycle or set switch at OFF and allow ice to melt off evaporator.



CAUTION

Never use any type of object to force ice from evaporator as damage may result.

3. Stacked ice machines: Remove ice chute as described under Removal of Parts for Cleaning, step 4, page 10.
4. Remove water curtain, Figure 29.
5. Remove all ice from bin.

6. Set ICE/OFF/WATER PUMP switch at WATER PUMP.
7. Add one ounce of sanitizer to water trough and allow solution to circulate a minimum of one minute.
8. Drain solution from trough by removing drain plug, Figure 26.
9. Thoroughly rinse trough with clean water, then reinstall drain plug.
10. Wash all surfaces requiring sanitizing (ice machine and bin) with a solution of one ounce of sanitizer to up to four gallons of water.
11. Thoroughly rinse all sanitized surfaces with clean water.
12. Set ICE/OFF/WATER PUMP switch at ICE.
13. Perform Operational Checks. Refer to Owner/Operator Use and Care Guide. Discard first batch of ice.

CHECKING AND CLEANING THE WATER DUMP VALVE

NOTE

This covers the Alco water dump valve only.

OPERATION CHECK

1. Remove top and right side panel.
2. Set ICE/OFF/WATER PUMP switch at ICE.
3. Check clear plastic outlet drain hose of dump valve, Figure 14, for leakage while the ice machine is in the freeze cycle.
4. If the dump valve is leaking or restricted, remove, disassemble and clean.

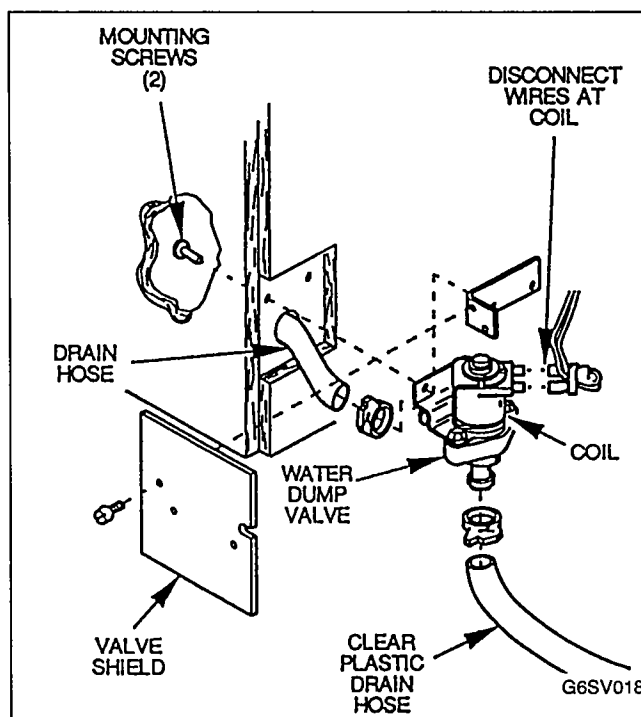


FIGURE 14. WATER DUMP VALVE REMOVAL

REMOVE WATER DUMP VALVE (Figure 14)



WARNING

Disconnect electric power to the ice machine at the electric service switch box.

NOTE

Water dump valve can be cleaned without removing.

1. Drain water trough by removing drain plug.
2. Remove water dump valve shield from water dump valve mounting bracket.
3. Disconnect wires from dump valve coil.
4. Remove two screws securing dump valve to mounting bracket.
5. Remove tubing from dump valve by twisting off hose clamps.

DISASSEMBLE WATER DUMP VALVE (Figure 15)

1. Lift cap and slide coil retainer cap from top of coil.

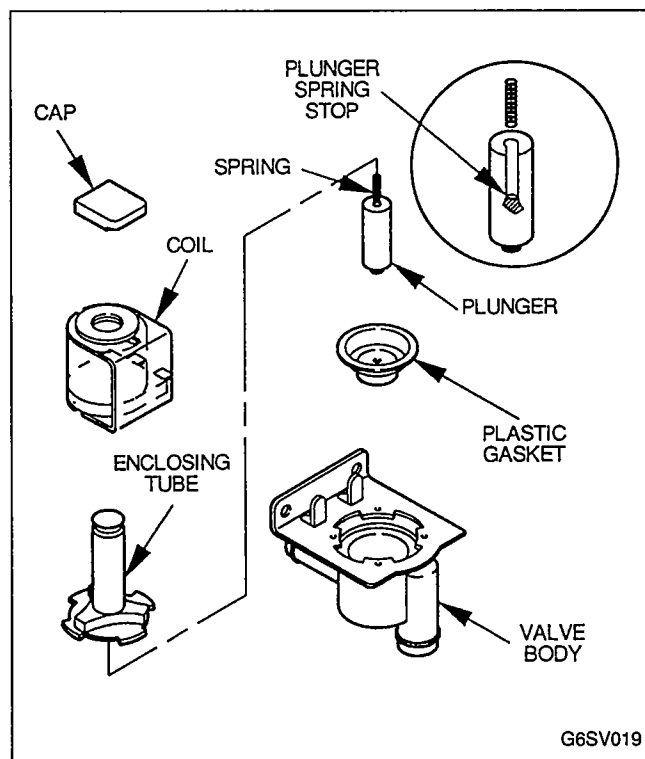


FIGURE 15. WATER DUMP VALVE DISASSEMBLY

2. Lift coil assembly off valve body. Note position of coil assembly on valve before removing. When reassembling valve, ensure coil is in same position.
3. Place spanner tool (Manitowoc Part No. 54-8907-3, available through your local Manitowoc Distributor) over enclosing tube and insert pins on spanner tool into holes on bottom of tube.
4. Turn spanner tool counterclockwise with 7/8" wrench and remove enclosing tube, plunger and rubber gasket from valve body.

NOTE

It is not necessary to remove spring from plunger when cleaning. If spring is removed, insert *flared* end of spring into slotted opening in top of plunger until spring comes in contact with plunger spring stop. Use care not to stretch or damage spring in plunger when cleaning.

CLEANING WATER DUMP VALVE

Replace excessively dirty or worn water dump valve components. Order Water Dump Valve Rebuild Kit, Part No. 24-0487-3. Contact your Manitowoc Distributor.

1. Soak components in cleaning solution (refer to Cleaning Procedures, page 12). Remove heavy scale deposits with a stiff-bristle brush. Use a small bottle brush to clean inside the enclosure tube. Wipe off rubber gasket with soft cloth.



CAUTION

Do not soak coil assembly.

2. Thoroughly rinse components with clean water.
3. Reassemble water dump valve and reinstall in ice machine.

SEQUENCE OF OPERATION

FREEZE CYCLE

(Prechill of Evaporator)

At the beginning of the freeze cycle the water pump will not start for 20 seconds. This allows the evaporator to prechill, minimizing build-up of slush in the sump trough.

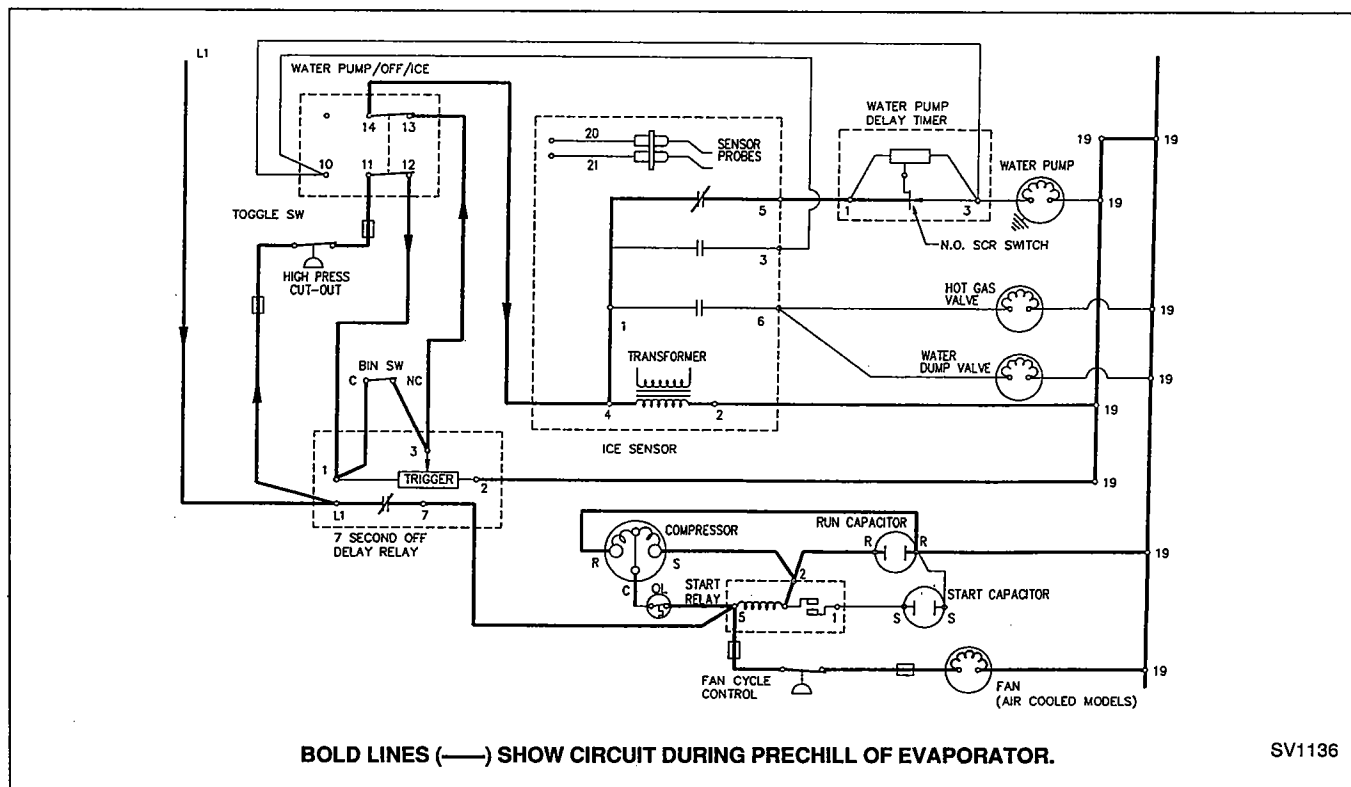


FIGURE 16. PRECHILL ELECTRICAL SEQUENCE

Prechill Electrical Sequence

- | | |
|--|--------------------|
| 1. Bin switch | closed |
| 2. High Pressure Cut-Out control | closed |
| 3. Toggle switch | ice position |
| 4. Primary power to transformer | yes |
| 5. Ice Sensor Relay | not energized |
| A) Ice Sensor Relay contact #6 | open |
| 1. Hot gas solenoid | not energized |
| 2. Dump valve solenoid | not energized |
| B) Ice Sensor Relay contact #3 | open |
| (water pump circuit during harvest cycle) | |
| C) Ice Sensor Relay contact #5 | closed |
| 1. Water pump delay timer | S.C.R. switch open |
| (the timer starts a preset 20-second delay period) | |
| D) Water pump | |
| (through Ice Sensor Relay contact #5 and water pump delay timer) | off |
| 6. 7-Second Delay Relay (contacts between L1 and 7) | closed |
| A) Fan motor (air-cooled models) | on |
| (fan cycle control may cycle fan on and off) | |
| B) Compressor | on |

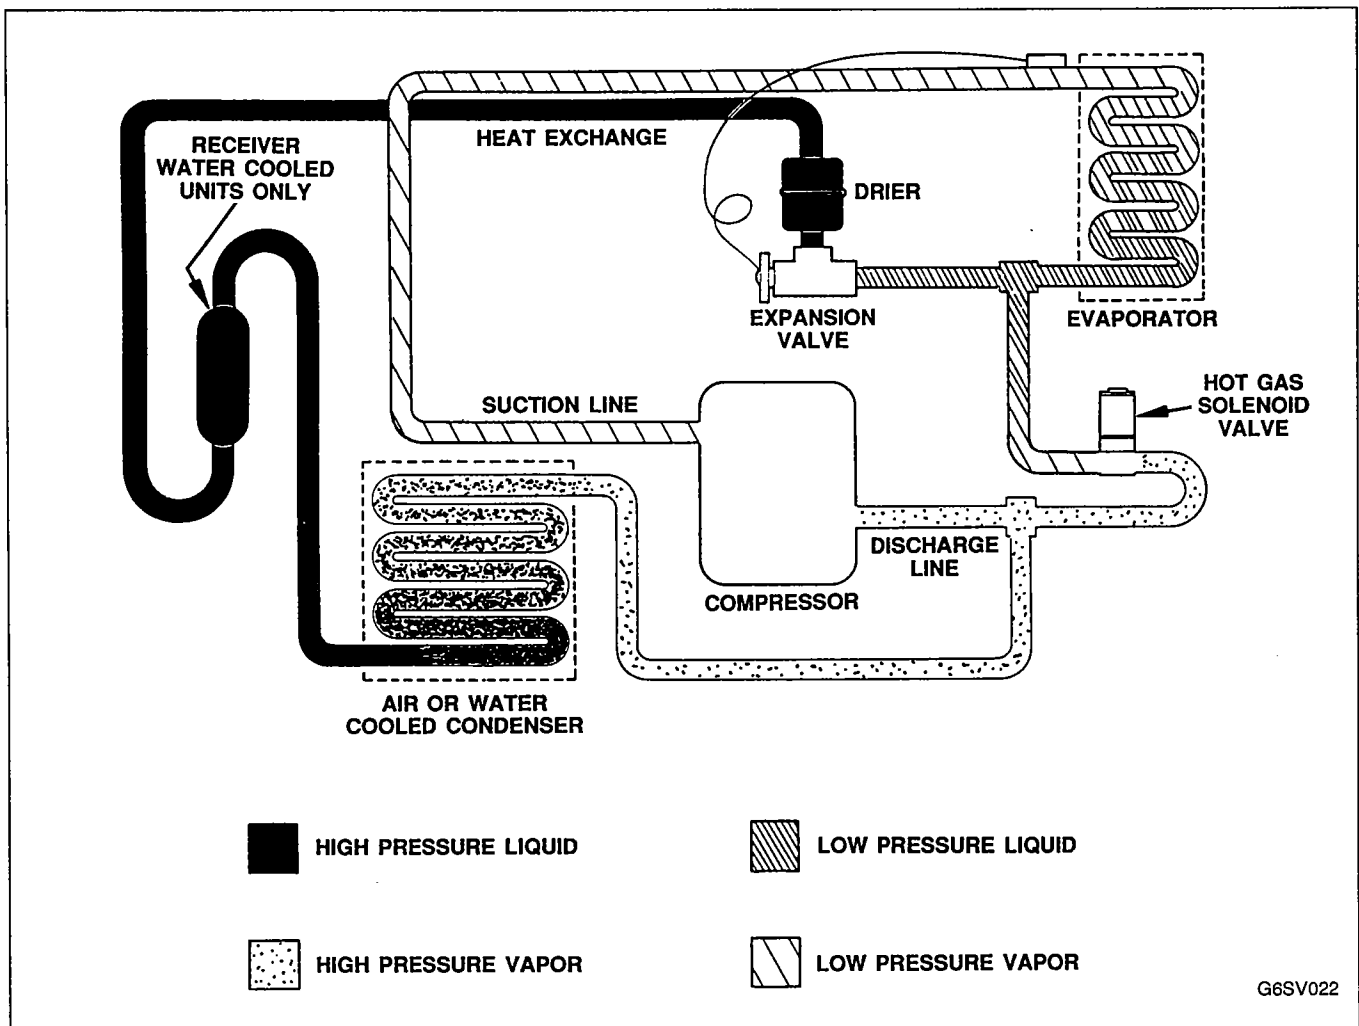


FIGURE 17. PRECHILL REFRIGERATION SEQUENCE

Prechill Refrigeration Sequence

There is no water flow over the evaporator during the prechill. The refrigerant absorbs heat (picked up during the harvest cycle) from the evaporator plate. The suction pressure decreases during prechill.

Prechill Water Flow Sequence

Water does not flow during the prechill.

FREEZE CYCLE

The freeze cycle begins when the Water Pump Delay Timer completes the 20-second delay and starts the water pump.

The water flows over the evaporator, forming ice on evaporator. The freeze cycle will last approximately 15-30 minutes, depending on air and water conditions. (Refer to Cycle Time Chart, page 39.)

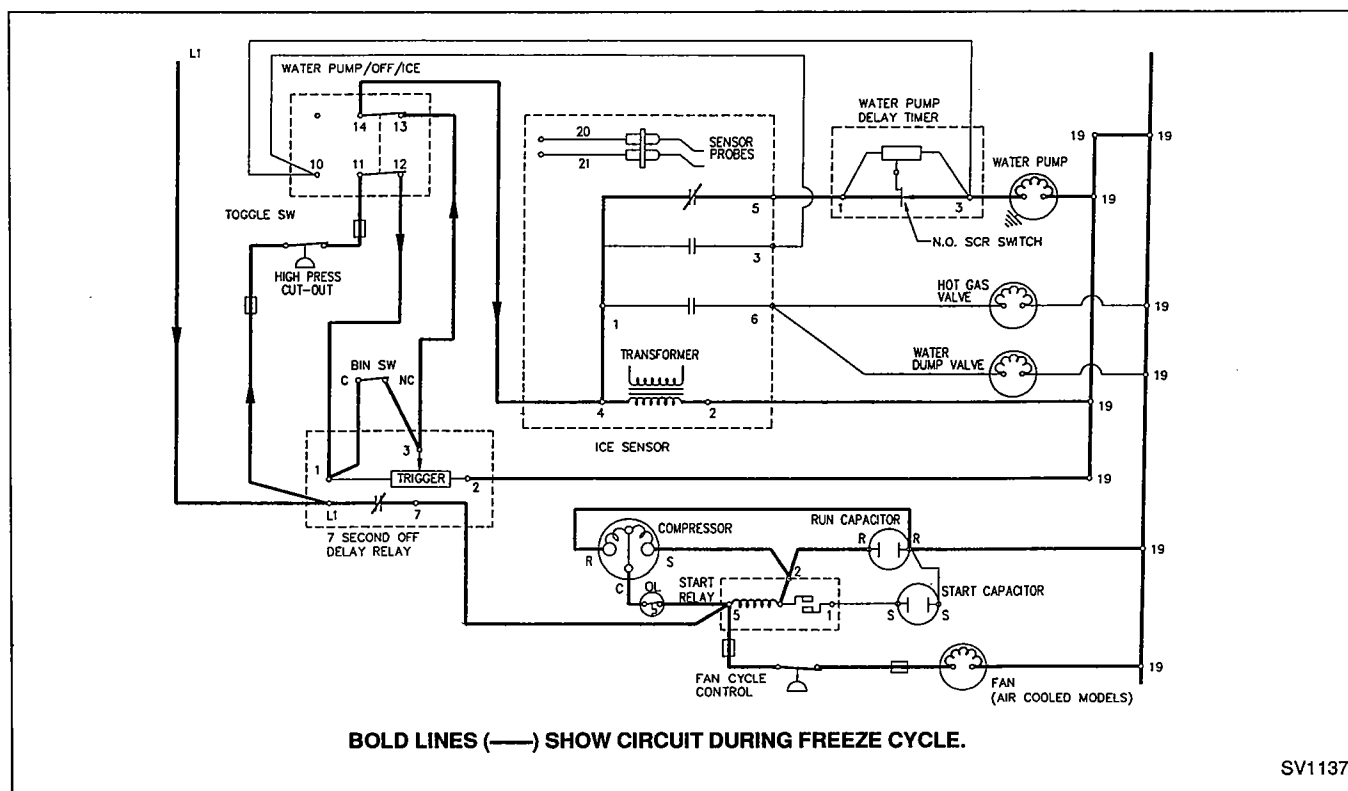


FIGURE 18. FREEZE CYCLE ELECTRICAL SEQUENCE

Freeze Cycle Electrical Sequence

- | | |
|--|----------------------|
| 1. Bin switch | closed |
| 2. High Pressure Cut-Out control | closed |
| 3. Toggle switch | ice position |
| 4. Primary power to transformer | yes |
| 5. Ice Sensor Relay | not energized |
| A) Ice Sensor Relay contact #6 | open |
| 1. Hot gas solenoid | not energized |
| 2. Dump valve solenoid | not energized |
| B) Ice Sensor Relay contact #3 | open |
| (water pump circuit during harvest cycle) | |
| C) Ice Sensor Relay contact #5 | closed |
| 1. Water pump delay timer | S.C.R. switch closed |
| (the timer starts a preset 20-second delay period) | |
| D) Water pump | on |
| (through Ice Sensor Relay contact #5 and water pump delay timer) | |
| 6. 7-Second Delay Relay (contacts between L1 and 7) | closed |
| A) Fan motor (air-cooled models) | on |
| (fan cycle control may cycle fan on and off) | |
| B) Compressor | on |

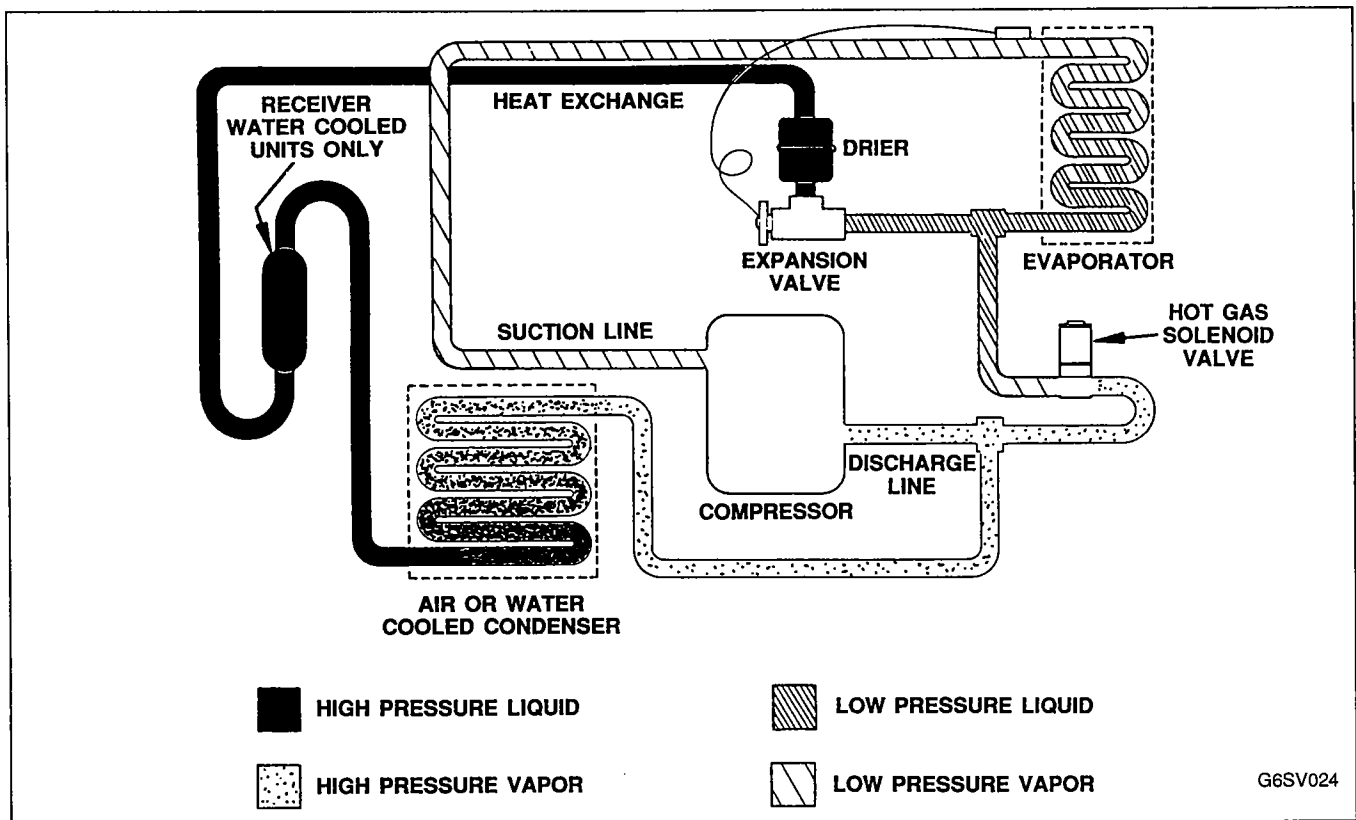


FIGURE 19. FREEZE CYCLE REFRIGERATION SEQUENCE

Freeze Cycle Refrigeration Sequence

The refrigerant is absorbing heat from the water running over the evaporator surface. The suction pressure gradually drops as ice forms.

Freeze Cycle Water Flow Sequence

The water from the sump trough is pumped to the distribution tube above the evaporator. It flows evenly over the evaporator forming ice. The float valve maintains the proper water level in the sump trough.

FREEZE CYCLE PRESSURES

Ambient Temp. °F	Head Pressure PSIG	Suction Pressure PSIG
Air Cooled		
50	175-225	44-24
70	175-225	44-24
80	200-250	44-26
90	240-280	46-26
100	265-310	48-28
Water Cooled		
50	220-230	44-26
70	220-230	44-26
80	220-230	46-26
90	220-230	46-26
100	220-230	46-26

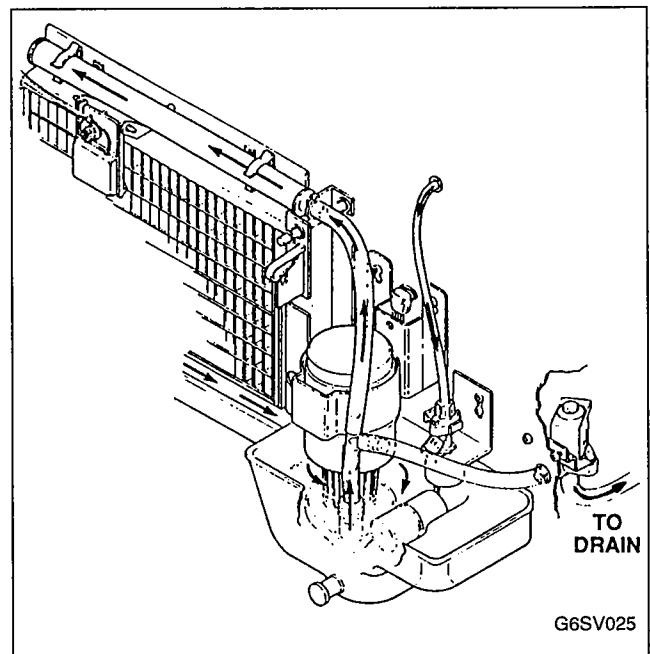


FIGURE 20. FREEZE CYCLE WATER FLOW SEQUENCE

HARVEST CYCLE

The harvest cycle begins when water flowing over the ice on the evaporator contacts the probes on the ice thickness control. After a constant 6-10 seconds of water contact, the relay in the unitized sensor board is energized, closing contacts #3 and #6 and opening contact #5.

Water stops flowing over the evaporator and is pumped through the dump valve. As hot gas warms the evaporator,

the ice cubes slide, as a unit, off the evaporator into the storage bin. The harvest cycle will last approximately 1 to 2 minutes. **Back to freeze cycle prechill:** the falling ice swings the bottom of the water curtain out, momentarily activating (opening) the bin switch. This interrupts the primary power supply at the transformer, de-energizing the ice sensor relay on the unitized sensor board.

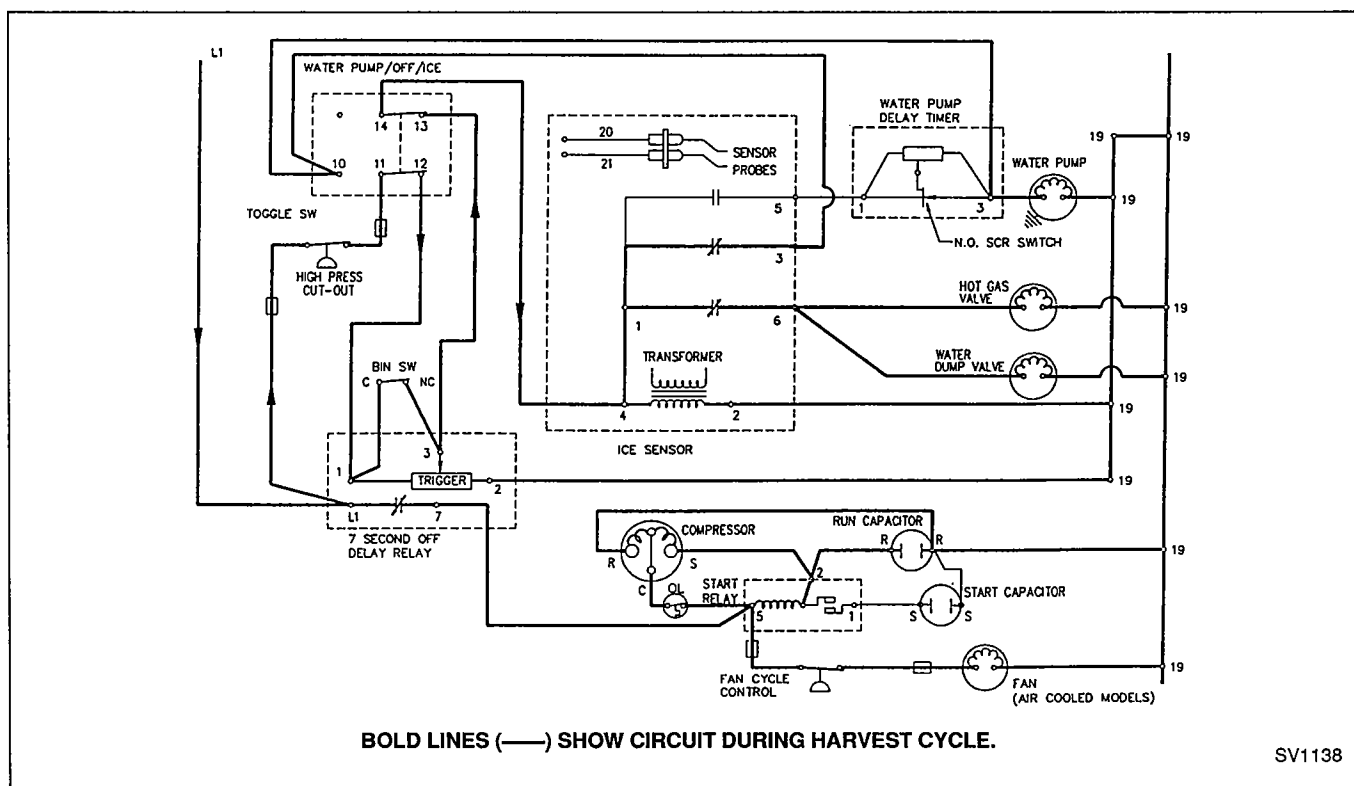


FIGURE 21. HARVEST CYCLE ELECTRICAL SEQUENCE

Harvest Cycle Electrical Sequence

- | | | |
|----|--|--------------------|
| 1. | Bin switch | closed |
| 2. | High Pressure Cut-Out control | closed |
| 3. | Toggle switch | ice position |
| 4. | Primary power to transformer | yes |
| 5. | Ice Sensor Relay | energized |
| A) | Ice Sensor Relay contact #6 | closed |
| 1. | Hot gas solenoid | energized |
| 2. | Dump valve solenoid | energized |
| B) | Ice Sensor Relay contact #3 | closed |
| | (water pump circuit during harvest cycle) | |
| C) | Ice Sensor Relay contact #5 | open |
| 1. | Water pump delay timer | S.C.R. switch open |
| D) | Water pump (through Ice Sensor Relay contact #3) | on |
| 6. | 7-Second Delay Relay (contacts between L1 and 7) | closed |
| A) | Fan motor (air-cooled models) | on |
| | (fan cycle control may cycle fan on and off) | |
| B) | Compressor | on |

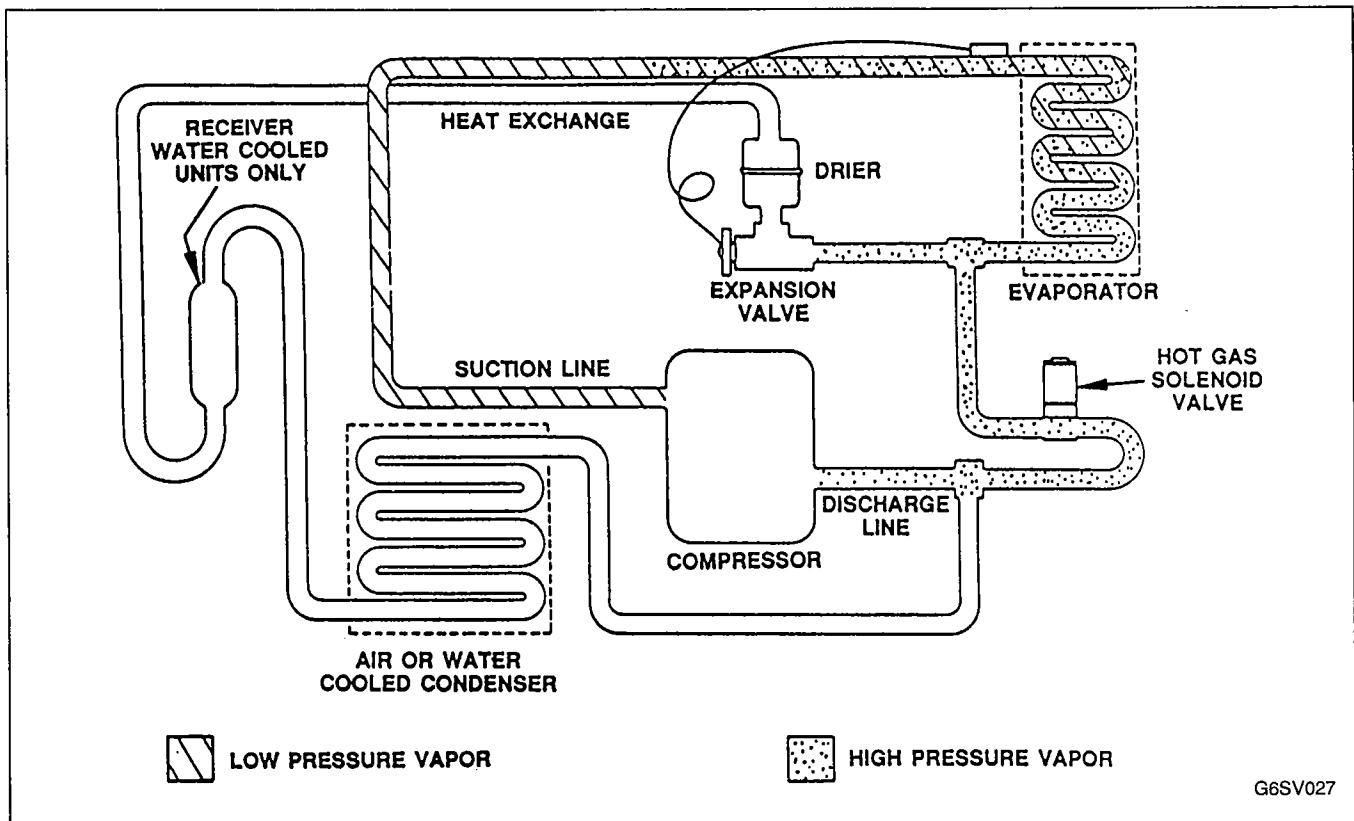


FIGURE 22. HARVEST CYCLE REFRIGERATION SEQUENCE

Harvest Cycle Refrigeration Sequence

Hot gas flows through the energized hot gas valve heating the evaporator. The hot gas valve is sized to allow the proper amount of refrigerant into the evaporator. This specific sizing assures proper heat transfer without the refrigerant condensing and slugging the compressor.

Harvest Cycle Water Flow Sequence

The water from the sump trough is pumped through the energized dump valve and down the drain. The flushing of the minerals after each freeze cycle helps to keep the cubes clear and reduces the frequency of the ice machine cleanings.

HARVEST CYCLE PRESSURES

Ambient Temp. °F	Head Pressure PSIG	Suction Pressure PSIG
Air Cooled		
50	125-150	85-100
70	125-150	85-100
80	135-165	85-110
90	160-200	95-120
100	170-210	125-145
Water Cooled		
50	125-150	70-90
70	125-150	75-95
80	125-150	80-100
90	125-150	85-105
100	125-150	85-105

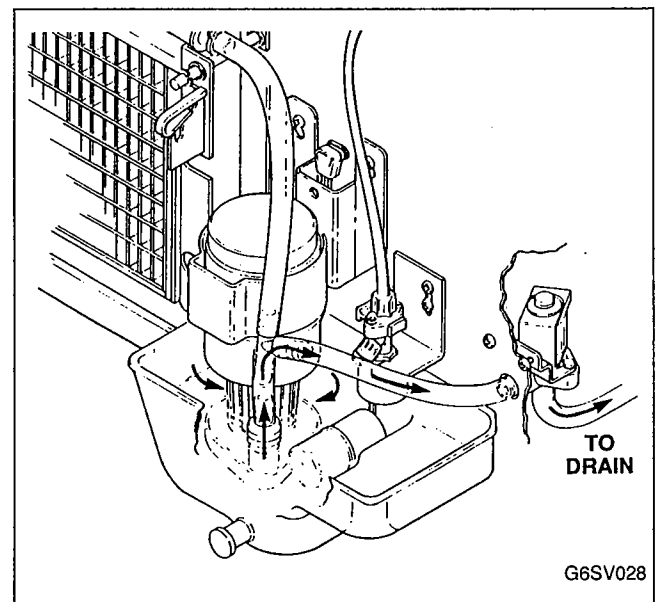


FIGURE 23. HARVEST CYCLE WATER FLOW SEQUENCE

AUTOMATIC SHUT-OFF (Full Bin of Ice)

When ice storage bin becomes full, the last harvesting ice cubes do not completely clear the water curtain. When the bin switch remains open for more than 7

seconds, the contact on the 7-second delay relay opens, de-energizing the compressor and fan motor. The open bin switch disconnects power to the other components. The return of the water curtain closes the bin switch and the ice machine starts a new freeze cycle.

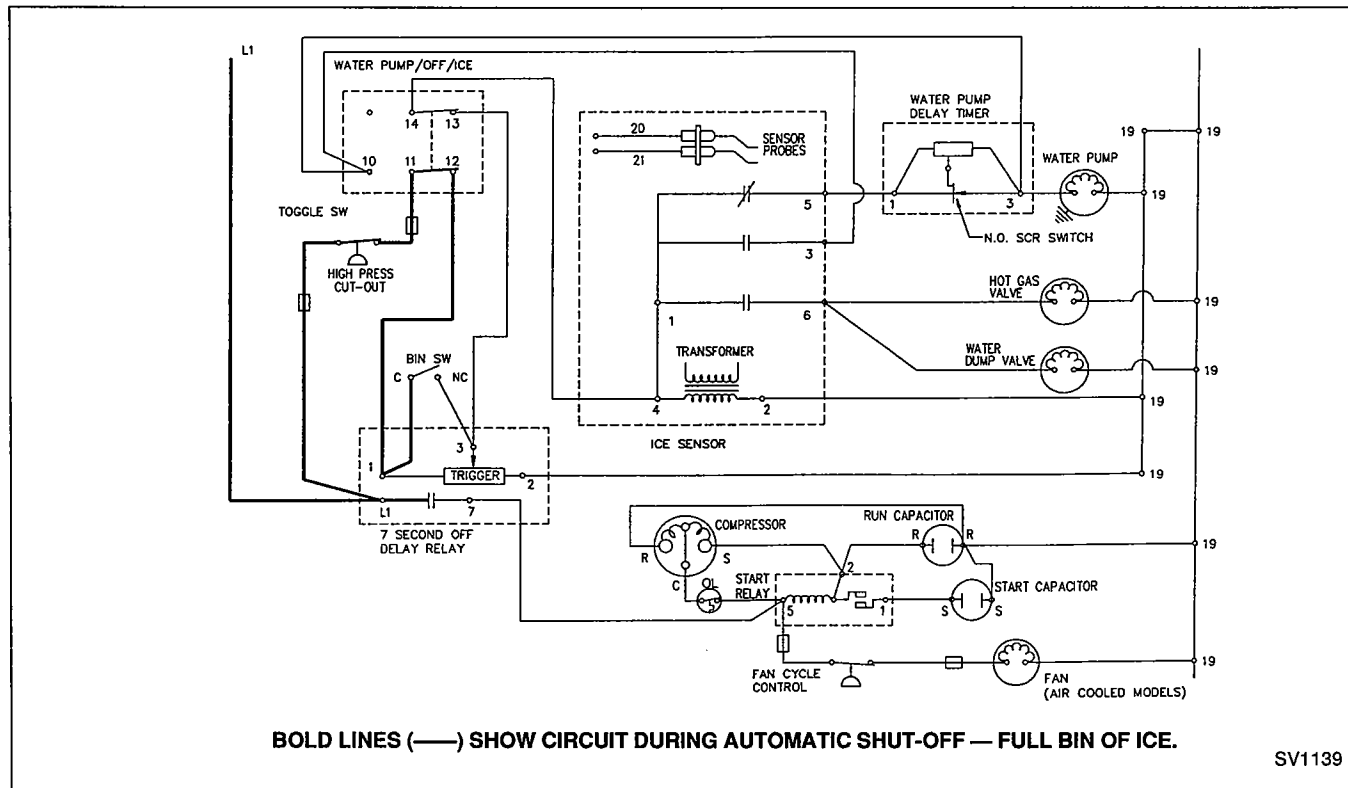


FIGURE 24. AUTOMATIC SHUT-OFF ELECTRICAL SEQUENCE

Automatic Shut-Off Electrical Sequence

1. Bin switch open
2. High Pressure Cut-Out control closed
3. Toggle switch ice position
4. Primary power to transformer no
5. Ice Sensor Relay not energized
 - A) Ice Sensor Relay contact #6 open
 1. Hot gas solenoid not energized
 2. Dump valve solenoid not energized
 - B) Ice Sensor Relay contact #3 open

(water pump circuit during harvest cycle)
 - C) Ice Sensor Relay contact #5 closed
 1. Water pump delay timer S.C.R. switch open
 - D) Water pump off
6. 7-Second Delay Relay (contacts between L1 and 7) open
 - A) Fan motor (air-cooled models) off

(fan cycle control may cycle fan on and off)
 - B) Compressor off

SERVICE DIAGNOSTIC CHART

Symptom	Possible Cause	Corrective Action
Ice machine will not run.	ICE/OFF/WATER PUMP switch: a. Not in ICE position. b. Defective/miswired. High pressure cut-out control tripped: a. Condenser water pressure low or off (water cooled). b. Condenser water temperature above 90°F (water cooled). c. Dirty condenser (air cooled). d. Refrigerant overcharge. e. High side refrigerant lines or component plugged. f. H.P.C.O. control defective. Circuit breaker tripped or blown fuse. Bin switch: a. Out of adjustment. b. Defective. Voltage too low. 7-second off delay relay defective.	Set switch at ICE. Check ICE/OFF/WATER PUMP switch, page 27. Open water service valve at water condenser inlet. Maintain water supply temperature between 33°F minimum and 90°F maximum. Clean condenser. Evacuate/recharge, page 52. Repair line/change drier. Check control, page 26. Reset circuit breaker or replace fuse. Check adjustment, page 25. Check bin switch, page 25. Electrical service must not fluctuate more than $\pm 10\%$. Check delay relay, page 29.
Water pump starts before 20-second prechill is completed.	Water pump delay timer: a. Out of adjustment. b. Defective timer.	Readjust to 20 seconds. Check timer, page 30.
Water pump does not start after 20 seconds prechill.	Water pump delay timer defective. ICE/OFF/WATER PUMP switch defective. Water pump defective.	Check timer, page 30. Check ICE/OFF/WATER PUMP switch, page 27. Check water pump, page 28.
Compressor cycles intermittently or will not run.	Voltage too low. Defective start relay. Defective start capacitor. Wiring to compressor. Defective compressor. 7-second off delay relay defective.	Electrical service must not fluctuate more than $\pm 10\%$ of nameplate voltage. Check relay, page 33. Check capacitor, page 34. Check for loose connection/miswiring or open and replace. Check compressor, page 33. Check delay relay, page 29.
Fan motor will not start.	Defective fan cycling control. Defective fan motor.	Check fan cycling control, page 25. Replace.
Ice machine will not cycle into harvest.		Refer to page 31 for Diagnostic Procedures.
Ice machine repeatedly cycles into harvest with little or no ice formation.		Refer to page 32 for Diagnostic Procedures.
Ice machine does not cycle from harvest to freeze when ice falls into bin.	Bin switch out of adjustment. Defective bin switch.	Adjust bin switch, page 25. Check bin switch, page 25.

Symptom	Possible Cause	Corrective Action
Water runs over evaporator during harvest cycle.	Drain line too small. Water dump valve defective or dirty.	Drain line must be 1/2" I.D. Refer to Checking and Cleaning Water Dump Valve, page 14.
Ice cubes too large/small.	Ice thickness probe out of adjustment.	Adjust ice thickness probe, page 27.
Shallow or incomplete cubes; incomplete ice fill pattern on evaporator.	Ice thickness probe out of adjustment. Ice machine dirty. Water filtration. Ice making water inlet supply too warm. Incorrect incoming water pressure. Leaking water dump valve. Refrigeration problem.	Adjust ice thickness probe, page 27. Clean and sanitize ice machine, refer to pages 10 and 14. Replace filters. Maintain water supply temperature between 33°F minimum and 90°F maximum. Water pressure must be 20-80 psig. Refer to Checking and Cleaning Water Dump Valve, page 14. Refer to Six-Step Diagnostic Procedure, page 35.
Ice machine does not release ice or is slow to harvest.	Ice machine dirty. Air-cooled models — low ambient. Water regulating valve leaking during harvest cycle (water-cooled models). R.T.V. sealant between white plastic and metal evaporator missing.	Clean and sanitize ice machine. Refer to pages 10 and 14. Minimum ambient is 35°F. Clean water regulating valve and condenser. Reseal with food grade R.T.V. sealant.
Low ice capacity.		Refer to Six-Step Diagnostic Procedure, page 35.

COMPONENT FUNCTION, SPECIFICATIONS AND CHECK PROCEDURES

BIN SWITCH

Function

Bin switch operation is controlled by movement of the water curtain (refer to Water Curtain, page 28). It resets ice machine to prechill period by momentarily interrupting power to the transformer board as ice falls from the evaporator. The bin switch also shuts the ice machine off when the bin is full.

Specifications

Single pole/single throw, normally closed.

NOTE

The N.O. terminal is not used.

Check Procedure

1. Pull water curtain away from evaporator until ice machine shuts off, Figure 25.
2. Slowly return curtain to evaporator. Ice machine should restart as bottom edge of water curtain passes just inside edge of water trough.
3. If bin switch adjustment is necessary, adjust as follows:
 - a. Set ICE/OFF/WATER PUMP switch at OFF.
 - b. Slowly pull bottom of water curtain away from evaporator until bin switch clicks, then slowly return curtain toward evaporator.
 - c. If bin switch clicks before water curtain reaches water trough, lengthen the bin switch activating pin, step 4b.
 - d. If bin switch clicks too far into evaporator, shorten the bin switch activating pin.
 - e. Set ICE/OFF/WATER PUMP switch at ICE after adjustment is complete.
4. Bin switch pin adjustment (see Figure 25):
 - a. Loosen brass nut.
 - b. Turn end of pin closest to water curtain counterclockwise to lengthen, clockwise to shorten.
 - c. Tighten brass nut after adjustment and repeat Check Procedure.
5. If bin switch does not operate properly after adjustment, check bin switch with Ohmmeter and/or voltmeter across N.C. and C. terminal while depressing and releasing activating pin. If bin switch does not open and close properly, replace switch.

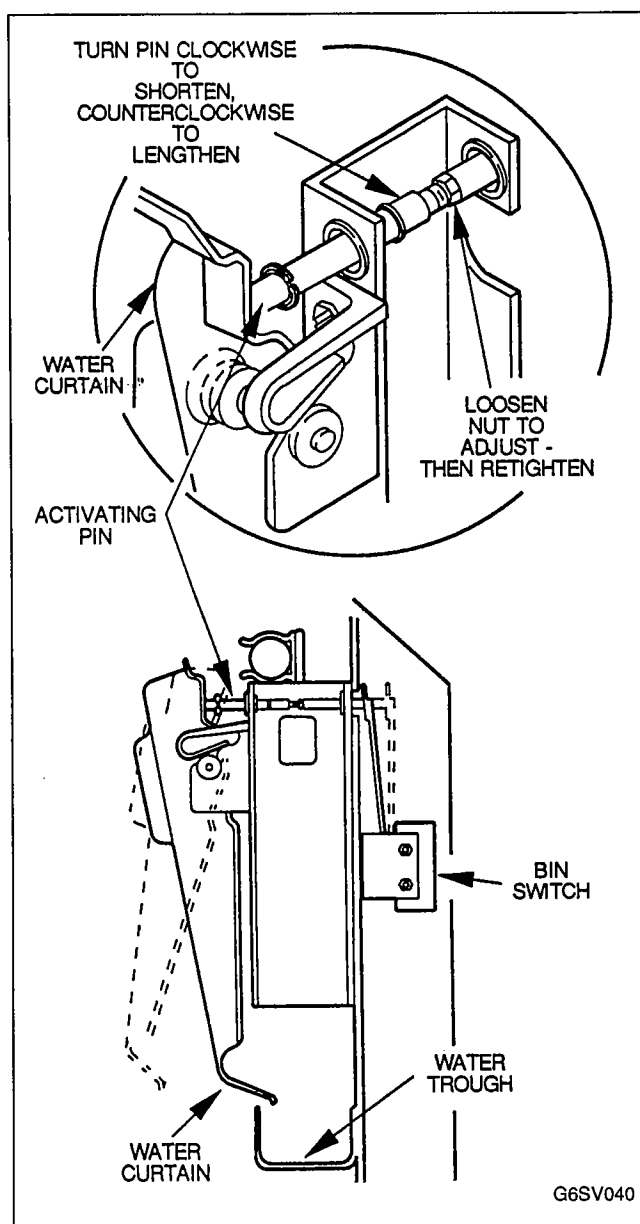


FIGURE 25. BIN SWITCH ACTIVATING
PIN ADJUSTMENT

FAN CYCLE CONTROL (Air-Cooled Models)

Function

Cycles fan motor on and off to maintain proper operating discharge pressure.

The fan cycle control is a normally closed control that opens on a drop in discharge pressure.

Specifications

Cut-out — 175 psig (± 5 psig)

Cut-in — 225 psig (± 5 psig)

Check Procedure

1. Verify fan motor windings are not open or grounded and fan spins freely.
2. Connect manifold gauges to ice machine. Refer to page 47.
3. Hook voltmeter in parallel (across) to the fan cycle control, leaving wires attached.
4. Pressure below 175 psig — read line voltage and fan should be off.

Replace Fan Cycle Control if:

Control does not operate within psig range listed above.

FLOAT VALVE

Function

Maintains correct water level in water trough.

Check Procedure

1. Set ICE/OFF/WATER PUMP switch at OFF.

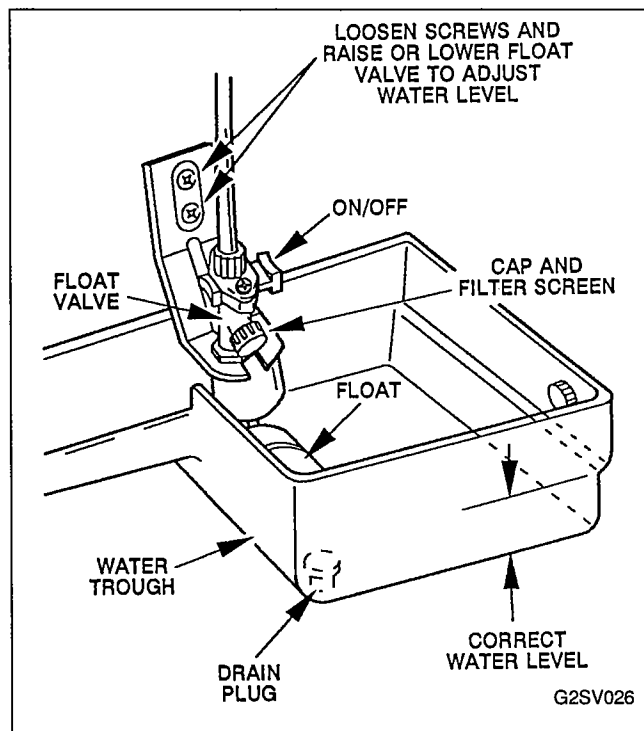


FIGURE 26. FLOAT VALVE CHECK

2. Remove drain plug from trough and allow water to drain. See Figure 26.

3. Reinstall drain plug on trough and allow trough to refill to proper level.

The float valve is factory set to maintain correct water level. If adjustment is necessary, proceed as follows:

- a. Loosen two screws on float valve bracket.
- b. Raise or lower float valve assembly, then tighten screws.
- c. If further adjustment is necessary, carefully bend float arm to achieve correct level.
- d. If float valve cannot be adjusted to maintain correct water level in trough, replace float valve.

HIGH PRESSURE CUT-OUT CONTROL — H.P.C.O.

Function

Safety control which turns the ice machine off if subjected to excessive high-side pressure. The H.P.C.O. control is a normally closed control and opens on a rise in pressure.

Specifications

Cut-out — 440 psig ± 10 .

Cut-in — manual reset (below 300 psig to reset).

Check Procedure

1. Set ICE/OFF/WATER PUMP switch at OFF and reset H.P.C.O. (if tripped).
2. Hook voltmeter in parallel (across) to the H.P.C.O. leaving wires attached.
3. Connect manifold gauges. Refer to page 47.
4. Procedures:
 - a. Water-Cooled Machines — Close the water service valve to the water condenser inlet. See Typical Installation illustration, page 5.
 - b. Air-Cooled Machines — Disconnect fan motor.
5. Set ICE/OFF/WATER PUMP switch to ICE.

No water or air flowing through the condenser will cause the H.P.C.O. control to turn the ice machine off because of excessive high pressure. Watch the high-pressure gauge and record the pressure at which the cut-out takes place.

Replace the H.P.C.O. control if:

1. The control will not reset. (Note: High-side pressure must be below 300 psig before resetting.)
2. The control does not open at the specified cut-out point of 440 psig ± 10 .

ICE THICKNESS PROBE

Function

Maintain correct ice thickness.

Check Procedure

Verify that wire connections are clean and tight. Inspect bridge connecting the cubes. The ice thickness probe is factory set to maintain 1/8-inch ice thickness. If adjustment is necessary, proceed as follows:

1. Turn adjustment screw (Figure 27) on ice thickness probe clockwise to increase thickness, counter-clockwise to decrease thickness.

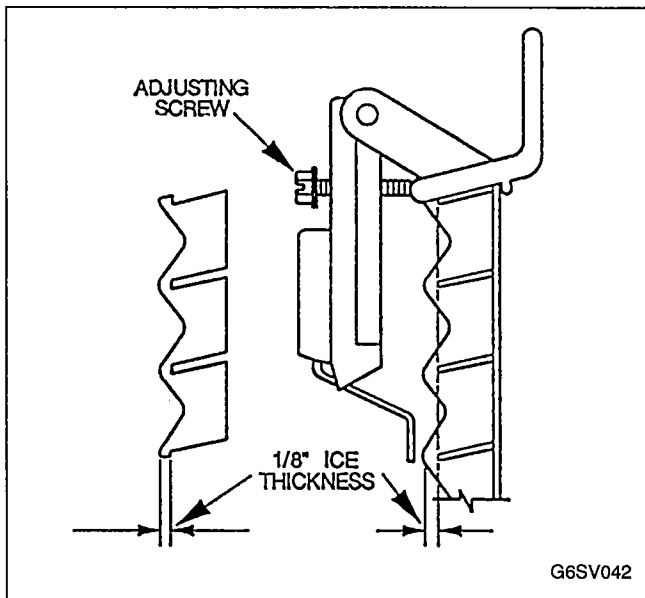


FIGURE 27. ICE THICKNESS CHECK

NOTE

Do not turn more than 1/4 turn at a time. Check ice at least two harvest cycles after initial adjustment before adjusting again (if necessary).

2. Ensure ice thickness probe wires and bracket do not restrict movement of probe.
3. If probe does not maintain correct ice thickness, refer to Diagnosing Electronic Control Circuitry, page 31.

ICE/OFF/WATER PUMP TOGGLE SWITCH

Function

Place ice machine in ICE, OFF, or WATER PUMP mode of operation.

Specifications

Double pole/double throw, 125V 20A.

Check Procedure



WARNING

DISCONNECT ELECTRIC POWER TO THE ICE MACHINE AT THE ELECTRIC SERVICE SWITCH BOX BEFORE PROCEEDING WITH THE FOLLOWING STEPS.

1. Inspect switch for correct wiring (Figure 28).
2. Disconnect all wires from toggle switch.
3. Check across switch terminals using a quality, calibrated Ohmmeter for correct readings as follows (replace switch if readings are incorrect):

- a. Switch set at ICE:

Switch Position

10-11	Open
11-12	Closed
13-14	Closed

- b. Switch set at WATER PUMP:

Switch Position

10-11	Closed
11-12	Open
13-14	Open

- c. Switch set at OFF:

Switch Position

10-11	Open
11-12	Open
13-14	Open

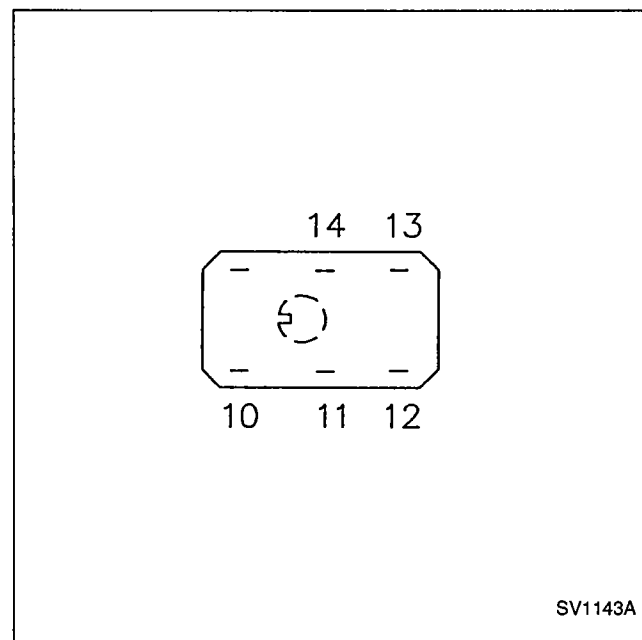


FIGURE 28. ICE/OFF/WATER PUMP SWITCH CHECK

WATER CURTAIN

Function

1. Prevent water from splashing into bin.
2. Acts as a lever to depress and release bin switch activating pin (refer to Bin Switch, page 25) as ice falls from the evaporator.

Check Procedure

1. Pull bottom of water curtain (Figure 29) away from evaporator, then release. Curtain should fall back to evaporator.

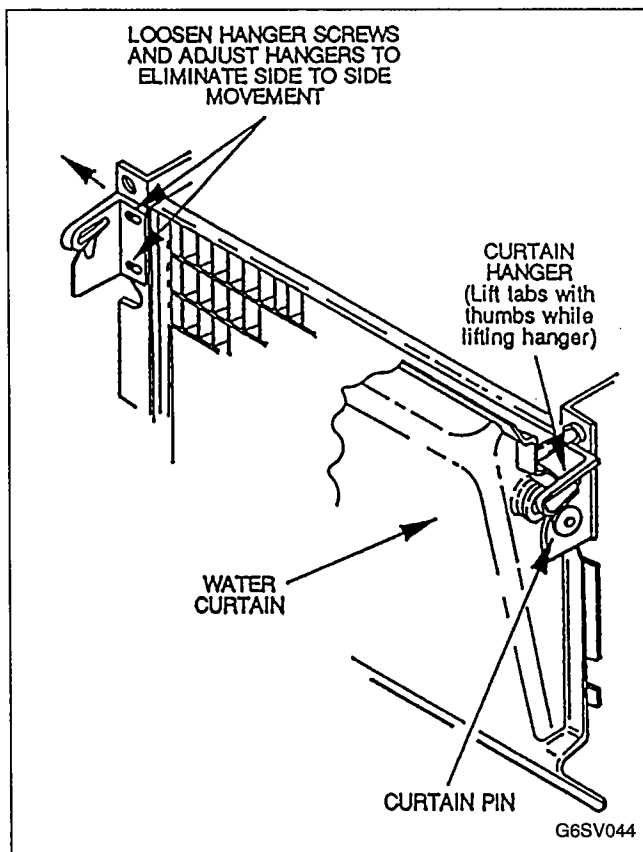


FIGURE 29. WATER CURTAIN CHECK

2. Move curtain from side to side. There should be little or no movement.

The water curtain is factory set and should require no adjustment. If adjustment is necessary, adjust as follows:

- a. Remove water curtain.
- b. Loosen curtain hanger screws (two per hanger) and slide hangers in or out to prevent side to side movement.
- c. Retighten hanger screws.
- d. Reinstall water curtain.

NOTE

Water curtain pin heads must be positioned under curtain hanger tabs. Curtain must be centered on evaporator when installed.

WATER PUMP

Function

1. Pump water over evaporator during freeze cycle.
2. Pump water through the dump valve and down the drain during harvest cycle.

Specifications

Refer to ice machine serial number plate for correct voltage and running amps.

Check Procedure

NOTE

Water pump runs quietly with no water in water trough.

Set ICE/OFF/WATER PUMP switch at WATER PUMP. If water pump runs with switch at WATER PUMP and does not run with switch set at ICE, the water pump is operating properly. Check water pump delay timer, page 30, for proper operation.

If water pump will not run with switch set at WATER PUMP, check the following procedures:

1. Check for proper line voltage ($\pm 10\%$) to the ice machine.
2. Unplug the water pump.
3. Set ICE/OFF/WATER PUMP switch at WATER PUMP and check voltage at water pump electric plug receptacle.
 - a. Line voltage — replace water pump after verifying pump impeller is not blocked by foreign objects.
 - b. No voltage — Check high pressure cut-out control, page 26, and ICE/OFF/WATER PUMP switch, page 27.

7-SECOND OFF DELAY RELAY

Function

1. Prevents interruption of compressor operation when going from the harvest cycle to the freeze cycle.
2. De-energizes the compressor and fan motor (air cooled only) when bin is full or when turned off at toggle switch.

Specifications

85-230 volt, 50/60 Hertz.

Check Procedure

Clip voltmeter leads across the normally open (N.O.) relay contacts L1 and 7. Keep all wire leads attached.

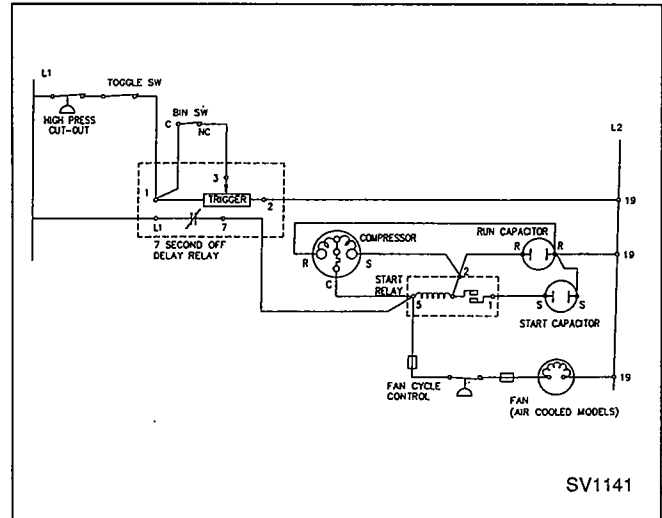


FIGURE 30. 7-SECOND OFF DELAY RELAY

NORMAL OPERATIONAL SEQUENCE (No Failure)

No Failure	Voltage Reading Terminals L1 and 7
Bin Empty	0 Volts
Bin Full (bin switch tripped for 7 seconds)	Line Voltage

7-SECOND OFF DELAY RELAY FAILURE CHART

Symptom	Voltage Terminals L1 and 7	Cause
Compressor and fan (air cooled) will not start with the bin switch closed (empty bin).	Line voltage.	Relay contacts staying open and will not close.
The ice machine functions properly with an empty bin. The compressor and fan (air cooled) will not shut off on a full bin of ice. (Bin switch tripped for 7 seconds.)	0 volts.	Relay contacts staying closed and will not open.

WATER PUMP DELAY TIMER

Function

The water pump delay timer (Figure 5) delays the water pump from starting at the beginning of the freeze cycle, prechilling the evaporator. The timer is adjustable and factory set at 20 seconds.

Specifications

85-230 volt, 50/60 Hertz.

Normally open (N.O.) silicon rectifier (S.C.R.) switch.

Check Procedure

IMPORTANT

The water pump must be functioning properly to check timer (refer to Water Pump, page 28).

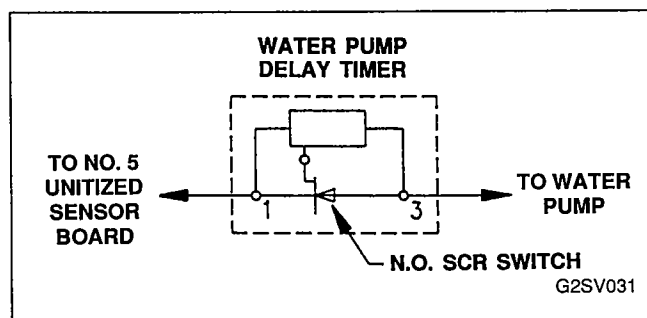


FIGURE 31. WATER PUMP DELAY TIMER CHECK

Clip voltmeter leads to terminals No. 1 and No. 3. Keep all wire leads attached. See Figure 31.

Normal Operational Sequence

First 20 seconds into freeze cycle — Water pump off. Line voltage.

After 20 seconds into freeze cycle — Water pump on. 0 volt (1 to 4 volt bleed is OK).

WATER PUMP DELAY TIMER FAILURE CHART

Symptom	Voltage Terminals #1 and #3	Cause
Water pump does not run.	Continual line voltage.	S.C.R. failed open and will not close.
Water pump on. No 20-second delay at start of freeze cycle. (May experience slushing in sump trough.)	Continual 0 voltage (or 1-4 volt bleed.)	S.C.R. failed closed and will not open.
Water pump off or running slow.	Approximately 1/2 line voltage.	S.C.R. failed half-wave.

DIAGNOSING ELECTRONIC CONTROL CIRCUITRY

UNITIZED SENSOR BOARD

The ice machine uses a unitized sensor board with a plug-in ice thickness probe to control the ice thickness by initiating the harvest cycle.

Function

1. A relay energizes or de-energizes the electrical components during the harvest cycle.
2. Electronics sense when the water is in contact with the ice thickness control probe.
3. A 6- to 10-second timer ensures that the water flowing over the evaporator completes an electrical circuit through the ice thickness control probe. This means the water must be in constant 6- to 10-second contact (not "splashing") with both probes before the ice machine cycles into harvest.
4. A safety timer ensures the ice machine does not remain in the harvest cycle for longer than 4 to 5 minutes.



CAUTION

THESE PROCEDURES MUST BE PERFORMED BY A QUALIFIED TECHNICIAN.

Do not make adjustments or turn the ice machine off until the malfunction is identified. The problem may be intermittent and you may lose the opportunity to make the checks while it is malfunctioning.

Follow the systematic approach throughout the diagnosis and write down information as it is collected. This will keep you organized.

A. POSSIBLE PROBLEM: ICE MACHINE WILL NOT GO INTO HARVEST

NOTE

These procedures require the use of a jumper wire with clip ends attached.

Step 1: Check primary voltage at transformer terminals 4 and 2 on board.

Does voltmeter indicate line voltage ($\pm 10\%$)?

IF NO: Check for correct wiring and loose or corroded connections. Also follow control circuitry to check components wired in series with terminals 4 and 2.

Do not proceed until line voltage is restored.

IF YES: Proceed to Step 2.

Step 2: Clip the leads of the jumper wire to the ice thickness control probe, Figure 32.

Does the ice machine go into the harvest cycle?

IF NO: The ice machine still will not harvest. Proceed to Step 3.

IF YES: The entire control circuitry is functioning properly. Check the following:

- a. Ice thickness probe adjustment, page 27.
- b. Ice thickness probe has scale build-up acting as an insulator. Clean probe.
- c. The water to the ice machine may not offer a low enough resistance across the probes for proper operation. To check, put a small amount of salt into water trough. This will lower the resistance level of the water. If the ice machine goes into harvest after putting salt into the water trough, order Resistor Kit, part number 76-2266-3, from your local Manitowoc Distributor. Install resistor kit across terminals 20 and 21. The ice machine will now operate properly.

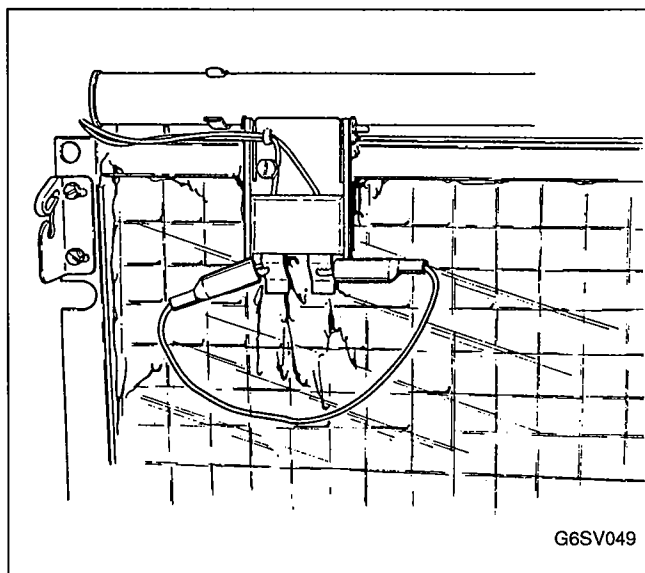


FIGURE 32. JUMPER WIRE CONNECTED TO PROBES

Step 3: Disconnect wires from terminals 20 and 21 on board. Connect jumper wire to terminals 20 and 21, Figure 33.

Does the ice machine go into the harvest cycle?

IF NO: Install new unitized sensor board.

IMPORTANT

Failure to check primary voltage (Step 1) can result in a misdiagnosis.

IF YES: The ice thickness probe is the cause of the malfunction. The ice thickness probe may simply be dirty. Clean the probe before replacing.

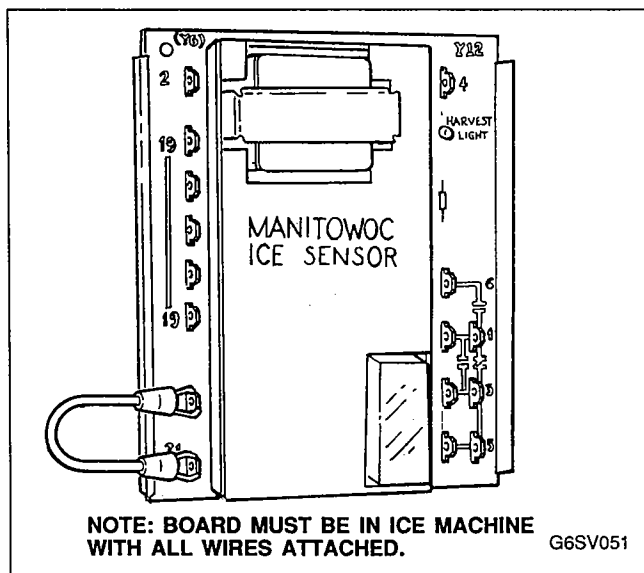


FIGURE 33. UNITIZED SENSOR BOARD

**B. POSSIBLE PROBLEM:
ICE MACHINE PREMATURELY
GOES INTO HARVEST WITHOUT
ICE FORMATION**

Step 1: Check primary voltage at transformer terminals 4 and 2 on board.

Does voltmeter indicate line voltage ($\pm 10\%$)?

IF NO: Check for correct wiring and loose or corroded connections. Also follow control circuitry to check components wired in series with terminals 4 and 2.

Do not proceed until line voltage is restored.

IF YES: Proceed to Step 2.

Step 2: Disconnect wires on terminals 20 and 21 on unitized sensor board. Activate bin switch to cycle ice machine into the freeze cycle.

Does the ice machine stay in the freeze cycle?

IF NO: Ensure there is no moisture between terminals 20 and 21 on board. If no moisture, install new unitized sensor board.

IMPORTANT

Failure to check primary voltage (Step 1) can result in a misdiagnosis.

IF YES: The ice thickness probe is causing the malfunction. The ice thickness probe may simply be dirty. Clean the probe before replacing.

DIAGNOSING COMPRESSOR AND START COMPONENTS ELECTRICALLY

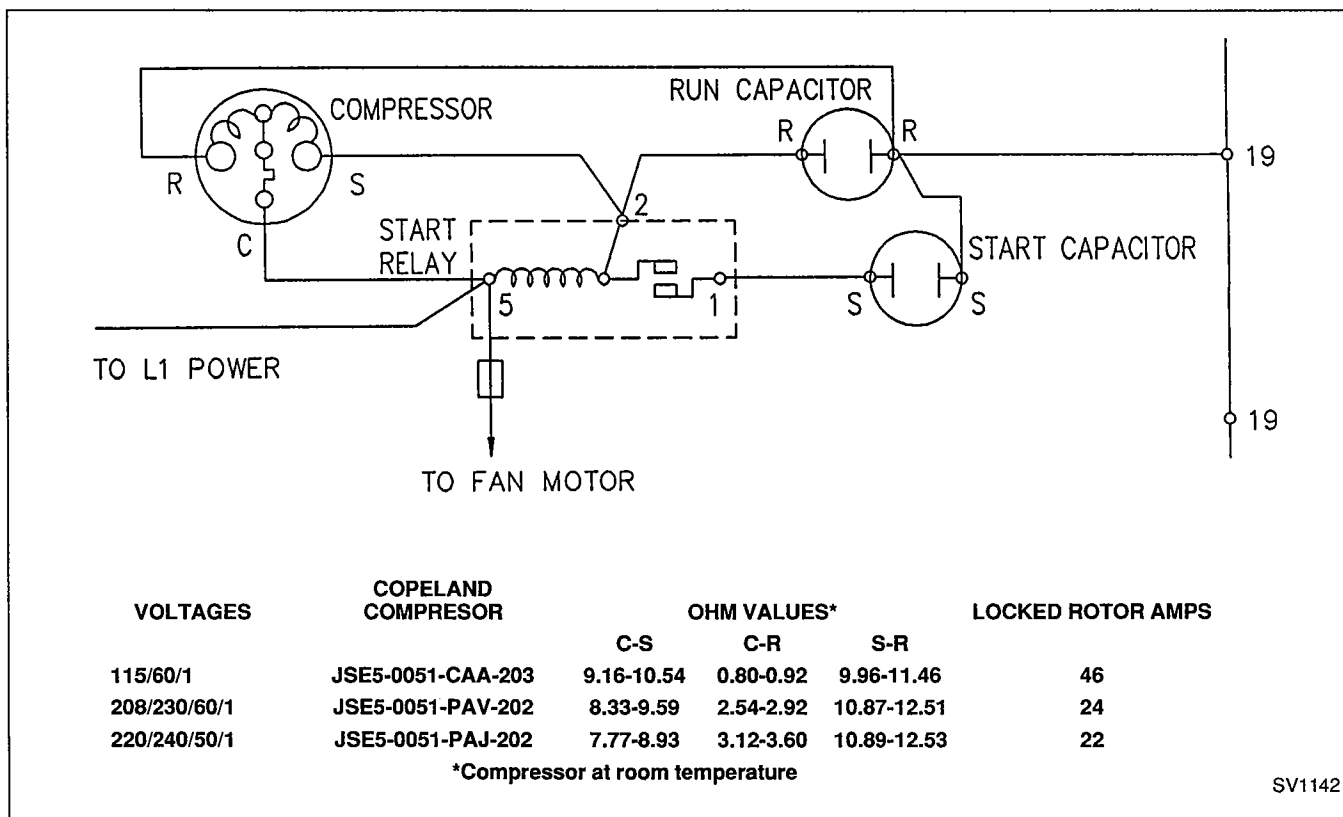


FIGURE 34. COMPRESSOR AND START COMPONENTS SCHEMATIC

Perform the following tests, in sequence, using a quality, calibrated volt-ohmmeter.

1. Verify electric power to ice machine at time of compressor start-up is $\pm 10\%$ of nameplate reading.
2. Verify the following control components are in the closed position:
 - Bin Switch, page 25.
 - High Pressure Cut-Out Control, page 26.
 - ICE/OFF/WATER PUMP Switch, page 27.
 - 7-Second Off Delay Relay, page 29.

- a. Terminals 1 and 2 (contact normally closed).
No continuity — replace relay.
Continuity — relay OK.
- c. Terminals 2 and 5.
No continuity — replace relay.
Continuity — relay OK.

4. Continuity check of compressor:

NOTE

Compressor must be at room temperature.

WARNING
DISCONNECT ELECTRIC POWER TO THE ICE MACHINE AT THE ELECTRIC SERVICE SWITCH BOX BEFORE PROCEEDING WITH THE FOLLOWING STEPS.

3. Continuity check of start relay (RX10,000 scale):
 - a. Disconnect wires from start relay. (If relay is being removed, keep it upright.)

- a. Disconnect wires from compressor terminals.
- b. Terminal C to Terminal R.
Continuity — see step e.
No continuity — open run winding.
Replace compressor.
- c. Terminal C to Terminal S.
Continuity — see step e.
No continuity — open start winding.
Replace compressor.
- d. Terminal C to shell of compressor.
Continuity — compressor grounded.
Replace compressor.
No continuity — compressor not grounded.

- e. Check winding resistance against values given in chart. The resistance values from C-R and C-S added together should equal the reading from S to R.
5. Capacitor check (run and start):
- a. Capacitors may show visual evidence of failure, such as a bulged terminal end or a ruptured membrane. However, *do not* assume a capacitor is good just because there are no visual signs of failure.
 - b. An effective test is to disconnect leads to the capacitor in the ice machine and connect them to a good capacitor.
- c. Use of a capacitor analyzer is recommended when checking a suspect capacitor. Follow instructions supplied with capacitor analyzer.
 - d. If all of the capacitor tests prove satisfactory and the compressor still fails to start:
 - 1) Replace start relay.
The new relay eliminates any faulty electrical characteristics such as improper pick-up or drop-out, which cannot be determined by the tests.
 - 2) If new relay fails to correct the problem, the compressor can be considered inoperative because of internal defects. Replace compressor.

REFRIGERATION AND OTHER NON-ELECTRICAL PROBLEMS

INTRODUCTION TO THE SIX-STEP DIAGNOSTIC PROCEDURE

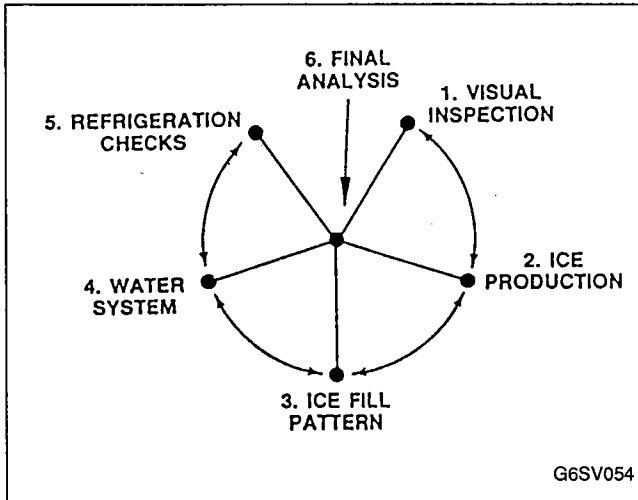


FIGURE 35. SIX-STEP DIAGNOSTIC PROCEDURE

The Six-Step Procedure (Figure 35) is designed to increase the accuracy of your service call, while decreasing the time required to identify any problems.

Refrigeration components will react and try to compensate for nonrefrigeration component problems. By following this procedure step by step, problems that affect the refrigeration sequence can be identified without needless changing of components.

Each of the six steps have several items to check before proceeding to the next step. Follow each step carefully as the problem may be identified prior to the completion of all six steps.

Step 6 requires the use of information gathered in the previous steps. Write down information as you collect it and record it on the Refrigeration Component Diagnostic Chart, page 46. This will keep you organized and simplify the 6th step of determining the malfunction.

NOTE

Do not make adjustments or turn the ice machine off until you have identified the malfunction. The problem may not repeat itself.

STEP 1 — VISUAL INSPECTION

Talk to the ice machine user to identify the perceived problem(s). The user's information could help you start in the right direction and may be a determining factor in your final diagnosis.

Following are a few questions to consider when talking to the ice machine user:

- When is the ice machine malfunctioning? (Night, day, all the time, during freeze cycle, harvest cycle, etc.)
- When do you notice low production? (One day a week, every day, weekends, etc.)
- Can you describe exactly what the ice machine seems to be doing?
- Has anyone been working on the ice machine?
- Were items such as boxes obstructing air flow moved from around the ice machine before you arrived?

EQUIPMENT VISUAL INSPECTION

(Record Your Findings on Refrigeration Component Diagnostic Chart, Page 46)

Possible Problem	Actual Finding	Corrective Measure
1. Ice machine not properly installed.		Reinstall in accordance with installation manual.
2. Air temperatures/air flow restrictions, etc.		Reinstall in accordance with installation manual.
3. Air space clearances at back and sides of ice machine.		Must have a minimum of 5 inches clearance around back and sides of machine.
4. Ice machine not level side-to-side, back-to-front.		Level machine.
5. Air-cooled condenser dirty.		Clean condenser.
6. Ice machine not on separate fused electrical circuit.		Install electrical in accordance with installation manual.
7. Drains not run separate and/or vented.		Run drains separate and vent according to installation manual.
8. Water filtration restricted (if used).		Install new water filter.

NOTE

Steps 2, 3 and 4 can be completed in conjunction with each other. Be careful not to interfere with the ice production check.

STEP 2 — ICE PRODUCTION

The amount of ice a machine produces is in direct relationship to water and air temperatures, this means an ice machine produces more ice in a 70°F room with 50°F water than in a 90°F room with 70°F water.

ICE PRODUCTION CHARTS (Lbs. of Ice per 24 Hours) (Regular cube size derate 7%)

Water-Cooled

Air Temp. °F	Water Temp. °F		
	50	70	90
70	240	205	170
80	235	200	165
90	230	195	160
100	225	190	155

Air-Cooled

Air Temp. °F	Water Temp. °F		
	50	70	90
70	260	245	220
80	235	215	195
90	205	185	165
100	175	150	140

These figures are based on a clean, properly maintained ice machine running continually for a 24-hour period, with an average ice weight of 2.375 lb. to 3 lb. per harvest.

Use the following to check and compare ice production:

IMPORTANT

Water curtain must be in place to assure no water is being lost while checking ice production.

OPERATING CONDITIONS

1. Condenser inlet air temperature _____
2. Water inlet temperature (taken at float outlet) _____
3. The published 24-hour ice production at the above conditions: _____ lb/24 hours

ICE PRODUCTION CHECK

1. Freeze time _____ + harvest time _____
= _____ total cycle time
2. $1440 \div \text{total cycle time}$ _____
= _____ cycles/day
3. Weight 1 harvest _____ x cycles/day _____
= _____ lb/24 hours

Times are in minutes.

Example: 1 min. 15 sec. convert to 1.25 min.
 $15 \text{ sec.} \div 60 \text{ sec.} = .25 \text{ min.}$

Weights are in pounds.

Example: 2 lb. 6 oz. convert to 2.375 lb.
 $6 \text{ oz.} \div 16 \text{ oz.} = .375 \text{ lb.}$

Compare your findings in the Ice Production Check to published specifications in Operating Conditions. Record your findings on Refrigeration Diagnostic Chart, page 46.

A. Ice Production OK:

Determine if another ice machine is needed, more storage capacity, or if moving existing equipment to lower load conditions will meet the customer's needs. (Contact local Manitowoc Distributor for options and accessories available.)

B. Low Ice Production:

Record your findings on the Refrigeration Diagnostic Chart (page 46), then continue through the Six-Step Procedure.

STEP 3 — ICE FILL PATTERN

The fill pattern on the evaporators is normal when the ice thickness is a uniform 1/8 inch from top to bottom and side to side. (The ice bridge is the inter-connecting waffle between the cubes. Refer to page 27.) The water should freeze on the entire evaporator at the same time. Ice forming on the bottom of an evaporator then working its way up to the top is not normal and must be noted as "thin on top and thick on bottom."

IMPORTANT

The water curtain must be in place to ensure no water is being lost while checking ice fill pattern.

Examples of ice fill patterns:

Normal ice fill — uniform 1/8-inch bridge thickness on entire evaporator surface.

Thick on top and thin on bottom.

Thin on top and thick on bottom.

Spotty ice fill (i.e., corner not filling, etc.).

Record your findings on the Refrigeration Diagnostic Chart, page 46. (Step 3 actual findings column of chart.)

STEP 4 — WATER SYSTEM

Water-related problems in ice machines often have the same symptoms as a refrigeration system malfunction.

Water-related failures must be identified and eliminated prior to changing of refrigeration components. An example is a water dump valve leaking during the freeze cycle and a starving TXV. The characteristics of both failures are similar.

CHECK WATER RELATED PROBLEMS

(Record Your Findings on Refrigeration Component Diagnostic Chart, Page 46.)

Possible Problem	Actual Finding	Corrective Measure
1. Water area (evaporator) dirty.		Clean.
2. Water inlet pressure not between 20-80 psi.		Install water regulator valve or increase water pressure.
3. Incoming water supply temperature must be 35°F to 90°F.		Too hot — check hot water line check valves in other store equipment.
4. Water filter restricted (if used).		Replace filter.
5. Dump valve malfunctioning.		Clean dump valve. Replace as needed, page 14.
6. Vent tube not installed on water outlet drain.		See Installation Manual.
7. Water trough hoses leaking water.		Install properly or replace.
8. Water float valve stuck open or out of adjustment.		Readjust float, page 26.
9. Water freezing behind evaporators.		Check water flow.
10. Water freezing between white plastic extrusions and evaporator.		Seal with food-grade silicone (RTV) adhesive.
11. Water flow uneven across evaporator.		Clean ice machine. Check water flow rate.

STEP 5 — REFRIGERATION

The refrigeration section requires taking several checks to gather information.

NOTE

Only proceed to Refrigeration System Step 5 after Steps 1-4 have been thoroughly checked and a final diagnosis could not be determined.

OPERATIONAL PRESSURE CHART

Water-Cooled

Ambient Temp. °F	Freeze Cycle		Harvest Cycle	
	Head Pressure PSIG	Suction Pressure PSIG	Head Pressure PSIG	Suction Pressure PSIG
50	220-230	44-26	125-150	70-90
70	220-230	44-26	125-150	75-95
80	220-230	46-26	125-150	80-100
90	220-230	46-26	125-150	85-105
100	220-230	46-26	125-150	85-105

Air-Cooled

Ambient Temp. °F	Freeze Cycle		Harvest Cycle	
	Head Pressure PSIG	Suction Pressure PSIG	Head Pressure PSIG	Suction Pressure PSIG
50	175-225	44-24	125-150	85-100
70	175-225	44-24	125-150	85-100
80	200-250	44-26	135-165	85-110
90	240-280	46-26	160-200	95-120
100	265-310	48-28	170-210	125-145

CYCLE TIME CHART

NOTE

To calculate total cycle time, add harvest time to freeze time listed in charts.

Water-Cooled

Ambient Temp. °F	Freeze Time			Harvest Time
	Water Temp.			
	50°F	70°F	90°F	
70	13-17	15-20	18-24	1-2
80	13-17	16-20	19-25	
90	13-17	16-21	20-26	
100	14-18	16-21	20-26	

Air-Cooled

Condenser Ambient Temp. °F	Freeze Time			Harvest Time
	Water Temp.			
	50°F	70°F	90°F	
70	11-14	12-15	13-17	1-2
80	13-17	14-18	17-20	
90	15-21	17-22	19-24	
100	18-25	20-29	23-29	

RECORD PRESSURE OF FREEZE AND HARVEST CYCLES

Freeze Cycle	Discharge	Suction
1. One minute into freeze		
2. Middle of freeze		
3. End of freeze		
Harvest Cycle		
1. One minute into harvest		
2. Middle of harvest		
3. End of harvest		

Step 5A — Analyze Discharge Pressure

Using the Operational Pressure Chart, page 39, determine if the discharge pressure is correct for the ambient temperature the ice machine is located in.

A. If discharge pressure is within normal range, proceed to Step 5B to analyze suction pressure.

B. If discharge pressure is not within normal range, refer to the appropriate chart below.

C. Record findings on Refrigeration Diagnostic Chart, page 46.

DISCHARGE PRESSURE HIGH

Eliminate the possible problems in the order listed on chart and follow appropriate corrective measures.

Possible Problem	Actual Finding	Corrective Measure
1. Load conditions high (air/water temperatures).		Refer to Installation Instructions.
2. Dirty condenser.		Clean.
3. Water regulating valve (water-cooled condenser): a. Too small supply water line. b. Out of adjustment. c. Defective regulating valve.		Replace with proper size line. Replace.
4. Fan motor/fan cycling switch defective.		Diagnose control, page 25.
5. Restriction in high side lines.		Repair, see Evacuation/Recharging Procedures, page 52.
6. Improper refrigerant charge.		Refer to Evacuation/Recharging Procedures, page 52.
7. Noncondensables in system.		Refer to Evacuation/Recharging Procedures, page 52.

DISCHARGE PRESSURE LOW

Eliminate the possible problems in the order listed on chart and follow appropriate corrective measures.

Possible Problem	Actual Finding	Corrective Measure
1. Load conditions low (air/water temperatures).		Relocate ice machine to location within guidelines (refer to Installation Instructions).
2. Water regulating valve (water-cooled condenser): a. Out of adjustment. b. Leaking water during harvest cycle. c. Defective.		Readjust/replace if necessary. Replace.
3. Fan motor/fan cycling switch defective.		Diagnose control, page 25.
4. Low refrigerant charge.		Continue through Six-Step Procedure.


Step 5B — Analyze Suction Pressure

NOTE

Discharge pressures must be analyzed before suction pressure.

To analyze suction pressure you must compare the Operational Pressure Chart, page 39, to the Cycle Time Chart, page 39. The suction pressure gradually drops as ice forms throughout the freeze cycle.

- A. **Normal suction pressure:** proceed through Six-Step Procedure. (Example: 37 psig after 9 minutes into the freeze cycle is normal at 90°F air and 70°F water.)
- B. **Low suction pressure:** Refer to Suction Pressure Low chart, page 42. (Example: 20 psig after 3 minutes into the freeze cycle is considered low.)
- C. **High suction pressure:** Refer to Suction Pressure High chart below. (Example: 40 psig after 10 minutes into the freeze cycle is considered high.)

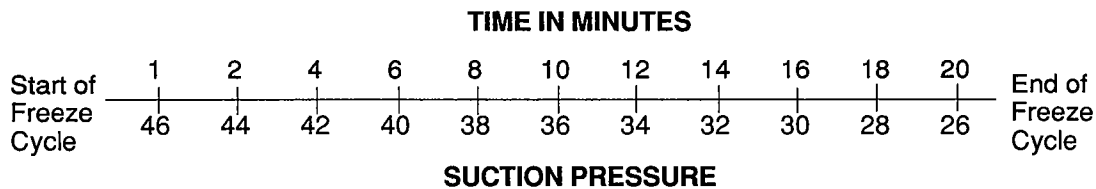

By comparing the two charts you can determine if suction pressure is properly pulling down. Develop a chart as above and you will easily see where the suction pressure should be compared to the amount of time the ice machine is into the freeze cycle.

NOTE

If the ice machine is located in other than 90°F air and 70°F water another chart must be developed for comparison purposes.

Example: G200 self-contained, air-cooled:
air temperature 90°F
water temperature 70°F

From Cycle Time Chart, page 39:
freeze time — 17 to 22 minutes
harvest time — 1 to 2 minutes
total cycle time — 18 to 24 minutes

From Operational Pressure Chart, page 39:
Suction pressure:
start of freeze — 46 psig
end of freeze — 26 psig

SUCTION PRESSURE HIGH

Eliminate the possible problems in the order listed on chart and follow appropriate corrective measure.

Possible Problem	Actual Findings	Corrective Measure
1. High discharge pressure affecting low side.		See Discharge Pressure High, page 40.
2. Hot gas valve stuck wide open.		Replace valve, page 49.
3. TXV flooding.		Continue through Six-Step Procedure.
4. Inefficient compressor (do not perform pumpdown test).		Continue through Six-Step Procedure.

SUCTION PRESSURE LOW

Eliminate the possible problems in the order listed on chart and follow appropriate corrective measure.

Possible Problem	Actual Findings	Corrective Measure
1. Low load conditions.		Relocate ice machine to location within guidelines.
2. Water system problem.		Refer to Step 4, page 38.
3. Tubing separating from back side of evaporator.		Replace evaporator.
4. Plugged drier/restriction in liquid line.		Repair — refer to Evacuation/Recharging Procedures, page 52.
5. TXV starving.		Continue through Six-Step Procedure.
6. Improper refrigerant charge.		Continue through Six-Step Procedure.

Step 5C — Hot Gas Valve Check

POSSIBLE PROBLEMS:

1. Improper valve.

A hot gas valve requires a specific orifice size which meters the proper amount of hot gas flow into the evaporator during the harvest cycle. Replace defective hot gas valves with "original" Manitowoc replacement (O.E.M.) parts only. Refer to your Parts Manual for proper valve application.

2. Stuck in harvest cycle: Check for voltage at coil.

IF YES: Refer to Electrical Sequence of Operation, page 16.

IF NO: Normally a hot gas valve can be repaired without changing the entire valve. Rebuild or replace the hot gas valve as required. Refer to Refrigeration Solenoid Valve Replacement, page 49.

3. Leaking during freeze cycle.

a. Symptoms of leaking hot gas valve:

- 1) Ice production loss will be normal.
- 2) Ice fill on both evaporators will be normal.
- 3) Suction pressure at the end of the freeze cycle will be slightly high. (This 1 to 4 psig increase can be difficult to detect.)

b. Check procedures.

- 1) Feel **hot gas valve inlet**, Figure 36, page 43, after 5 minutes into freeze cycle.



CAUTION

HOT GAS VALVE INLET COULD BE HOT ENOUGH TO BURN YOUR HAND. JUST TOUCH IT MOMENTARILY.

- 2) Determine if the inlet of hot gas valve is hot or close to compressor discharge line temperature.

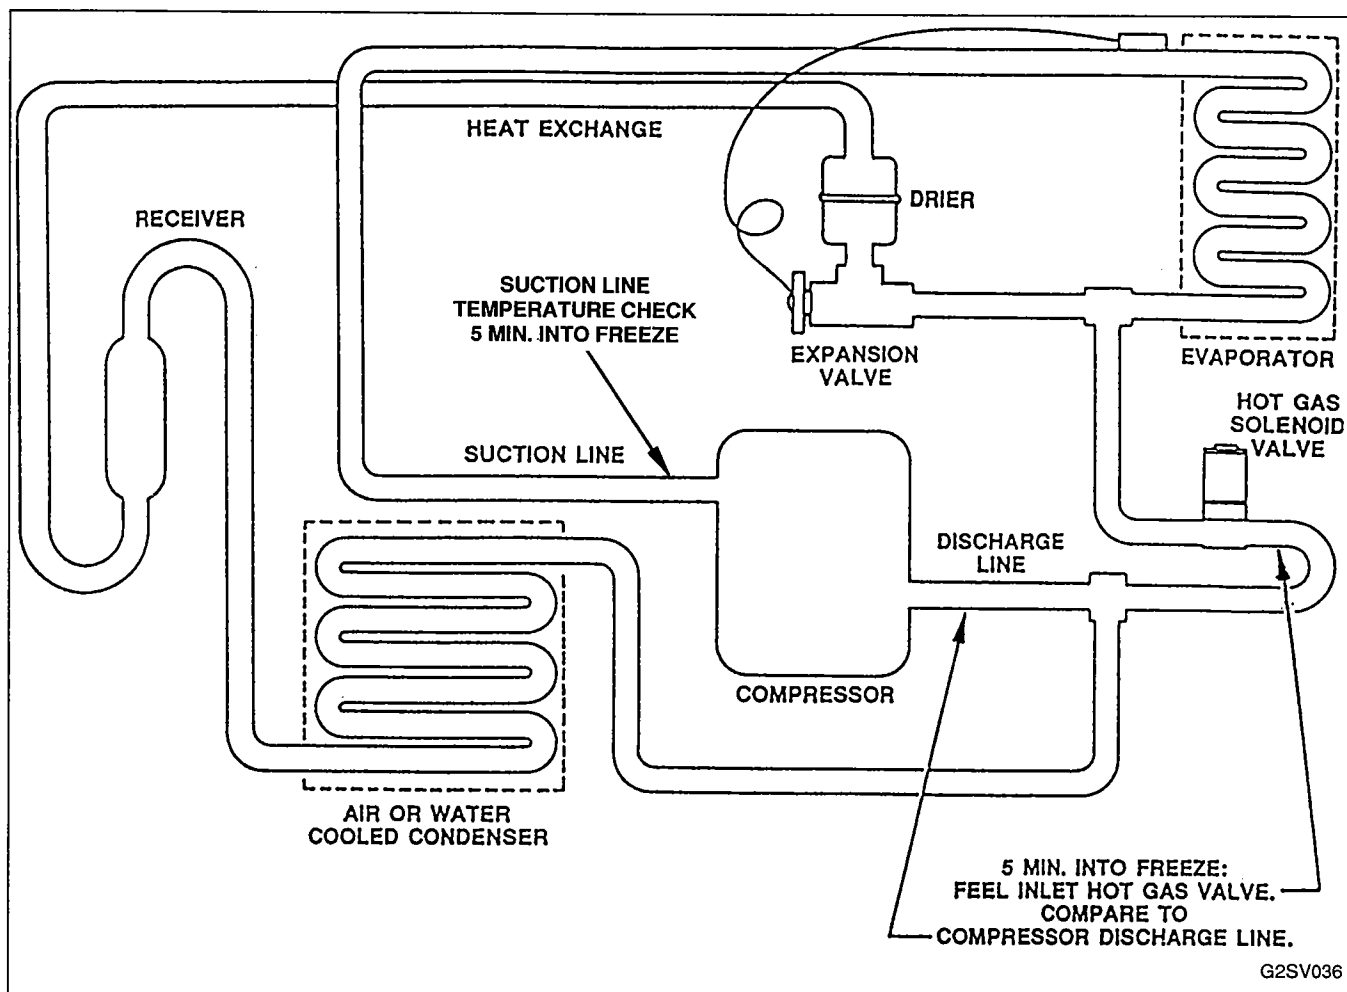


FIGURE 36. HOT GAS VALVE INLET FEEL CHECK/SUCTION LINE TEMPERATURE CHECK

- 3) A **good hot gas** valve inlet line will be hot to touch during the harvest cycle and be cool enough to touch after approximately 5 minutes into the freeze cycle. With a **leaking hot gas valve**, the inlet will remain close to the discharge line temperature (hot to touch) during the freeze cycle.

Record your findings on the Refrigeration Component Diagnostic Chart, page 46.

Hot Gas Valve Inlet Feel Check Findings: (circle one)

Compressor discharge temperature — Hot or Cool
Hot gas solenoid **inlet** temperature — Hot or Cool

Step 5D — Thermal Expansion Valve (TXV)/ Suction Line Temperature at Compressor

TXV POSSIBLE PROBLEMS:

1. Improper valve.
An improper valve will not achieve a uniform ice fill on the evaporator or proper ice production under all load conditions. Manitowoc O.E.M. expansion valves use special bulb gas charges, port sizes and stroke lengths to achieve this. Refer to the Parts Manual for proper valve usage.
2. TXV not installed properly.
Refer to TXV Installation Procedures, page 48.

3. TXV starving or flooding.

A starving or flooding expansion valve may be reacting to or trying to compensate for other refrigeration problems. All conditions that could cause a good TXV to starve or flood must be eliminated. The following example emphasizes this point:

An ice machine low on charge will cause a good TXV to starve. A service technician forgets to verify system charge and replaces the TXV for starving.

While changing the TXV the evacuation/charging procedures are performed correctly, and the proper charge put into the ice machine. The ice machine functions properly and the technician thinks he has diagnosed the problem correctly (bad TXV). In reality the problem was corrected because the proper charge was put in the machine.

- a. Symptoms of a starving valve:
 - 1) Low ice production (may not make ice).
 - 2) Ice fill pattern — thin on top of evaporator and thick on bottom of evaporator.
 - 3) Suction pressure — lower than normal during freeze cycle.
- b. Symptoms of a flooding valve:
 - 1) Low ice production (may not make ice).
 - 2) Ice fill pattern — thick on top of evaporator and thin on bottom of evaporator.
 - 3) Suction pressure — higher than normal during freeze cycle.

**Suction Line Temperature Check
(Figure 36, page 43).**

- 1. Measure the suction line temperature at the inlet of the compressor after 5 minutes into the freeze cycle.
- 2. Temperature indications:
 - a. No failure — a properly operating ice machine will maintain a temperature between 40°F and 70°F.
 - b. Hot gas valve leaking (not wide open) — temperatures will remain normal (between 40°F and 70°F).
 - c. Starving TXV — the temperatures will begin to climb above 50°F and, depending on how severe the failure, may go beyond the normal high of 70°F.
 - d. Flooding TXV — the temperatures will drop below the normal low of 40°F.

- e. Inefficient compressor (suction valves) — during the early stage of the failure temperature will be normal. As failure becomes worse the temperatures will rise above the normal high of 70°F.

Record your findings on the Refrigeration Component Diagnostic Chart, page 46, temperature of suction line at compressor.

Step 5E — Compressor

1. Suction valves (inefficient compressor).

An inefficient compressor can be hard to detect. Components or problems that are not directly related to the compressor can simulate a faulty compressor.

To diagnose a faulty compressor, systematically check other components and rule them out one by one. Following the entire Six-Step Procedure does this.

Symptoms of an inefficient compressor:

- a. Reduced ice production will be noticeable at lower ambient conditions and become more pronounced as ambient temperatures increase.
- b. Ice fill pattern — normal at lower ambients, although in extreme high ambient cases there may be little or no ice formation.
- c. Suction pressures at the end of freeze cycle will be slightly high and become more pronounced as ambient temperature increases.
- d. There may be intermittent flooding by the TXV.

NOTE

An inefficient compressor may “pump down” and hold; therefore this type of test must not be used as a determining factor for replacing compressors.

IMPORTANT

A broken compressor suction valve may allow enough gas to enter the suction side of the compressor causing the compressor and connecting lines to run extremely hot, including the inlet of the hot gas valve. This may give a false indication of a hot gas valve leaking.

2. Discharge valves.

NOTE

Discharge valve related problems are extremely rare in this type of application.

- a. The compressor shell will become hot and compressor may cycle on overload.
- b. Suction pressure will be high.
- c. Discharge pressure will be lower than normal.
- d. Check procedure for discharge valves:
 - 1) Ensure compressor is running.
 - 2) Turn ice machine off.
 - 3) Immediately feel suction line — it will turn hot if the discharge valve is leaking or broken.

STEP 6 — FINAL ANALYSIS

Thoroughly following the first 5 steps has eliminated all nonrefrigerant problems. The Refrigeration Component Chart will verify what is causing the problem.

Fill out the chart using the following procedures:

1. Based on the symptoms found while performing Steps 1 through 5, fill in the Actual Findings column.
2. Each time the actual finding is the same as the characteristic listed to the right of a step number, put a check in the appropriate box. (Example: the actual finding is "thin ice on top of evaporator.") The box under starving TXV is the only box checked across the ice fill pattern section.
3. Add the number of boxes checked (under) each component failure and put the total in the bottom column. Refer to the component column with the most boxes checked and follow the appropriate procedures as listed in "a" through "d" below.
 - a. Hot Gas Valve Leaking column: Normally a leaking hot gas valve can be repaired without changing the entire valve. Rebuild or replace the hot gas valve as required. Refer to Refrigeration Solenoid Valve Replacement, page 49.
 - b. TXV Starving column: Verify the ice machine is not low on charge before replacing the TXV. Use the following guidelines:

NOTE

A starving TXV will normally only affect the freeze cycle pressures. A low refrigerant charge will affect both freeze and harvest cycle pressures.

 - 1) Add charge in 2 to 4 oz. increments to see if the problem is corrected.
 - 2) If problem is not corrected by adding charge, change the TXV and drier. (Refer to Evacuating/Recharging, page 52.)
 - 3) If problem is corrected by adding charge, find the refrigerant leak, change the drier, evacuate and recharge, page 52. (System must operate with proper charge — do not leave run without changing drier, evacuating, and recharging.)
 - c. TXV Flooding column: Step 5A "Analyzing Discharge Pressure" has already verified the ice machine is not overcharged causing same symptoms as a flooding TXV. Replace the TXV and drier, evacuate, and recharge, page 52.
 - d. Inefficient Compressor column: Replace the compressor (and start components) and drier, evacuate, and recharge, page 52.

NOTE

To receive warranty credit on compressor, old start components must be returned with faulty compressor.

ICE MACHINE REFRIGERATION COMPONENT DIAGNOSTIC CHART

This chart is used with a detailed outline of each of the Six Steps listed.
Failure to follow the details of each step in order will result in a misdiagnosis.

STEPS	HOT GAS VALVE LEAKING (not wide open)	TXV STARVING	TXV FLOODING	INEFFICIENT COMPRESSOR (suction valve)	ACTUAL FINDINGS
1. Visual Inspection	Visual inspection includes checking for proper installation, location, dirty condensers, etc., and talking to the ice machine user to identify the perceived problem(s).				
2. Ice Production	Normal ice production. ☐	1. Low ice production. 2. Not making ice. ☐	1. Low ice production. 2. Not making ice. ☐	1. Minimal ice production loss (almost normal). 2. Low ice production. ☐	
3. Ice Fill Pattern	Ice fill is normal. ☐	1. Ice fill will be thick on bottom portion of the evaporator and thin on top. 2. No ice. ☐	1. Ice fill will be thin on bottom portion of the evaporator and thick on top. 2. No ice. ☐	Ice fill is normal. ☐	
4. Water System	Water related problems can simulate a refrigeration component malfunction. Water related problems must be eliminated before proceeding to step 5.				
Refrigeration System 5A. Discharge Pressure	Discharge pressure must be normal before proceeding to step 5B.				
5B. Freeze Cycle Suction Pressure	Normal to 4 psig high at end of freeze cycle. ☐	Lower than normal throughout freeze cycle. ☐	Higher than normal throughout freeze cycle. ☐	Slightly higher throughout freeze cycle. Pressures normally do pull down although normally take a long time. ☐	
5C. Hot Gas Valve Inlet Feel Check	The inlet of hot gas valve is hot and the compressor discharge is hot. ☐	The inlet of hot gas valve is cool and the compressor discharge is hot. ☐	The inlet of hot gas valve is cool and the compressor discharge is cool. ☐	The inlet of hot gas valve is cool and the compressor discharge is hot. ☐	
5D. Suction Line Temperature at Compressor	40°F to 70°F. ☐	Above 50°F. ☐	Below 40°F. ☐	Above 40°F. ☐	
Miscellaneous	☐	☐	☐	☐	
6. Final Analysis (number of boxes checked)	A.	B.	C.	D.	

HOW TO USE MANIFOLD GAUGES

Manifold gauges must be installed and removed properly to ensure no refrigerant contamination or loss occurs.

INSTALLING MANIFOLD GAUGES

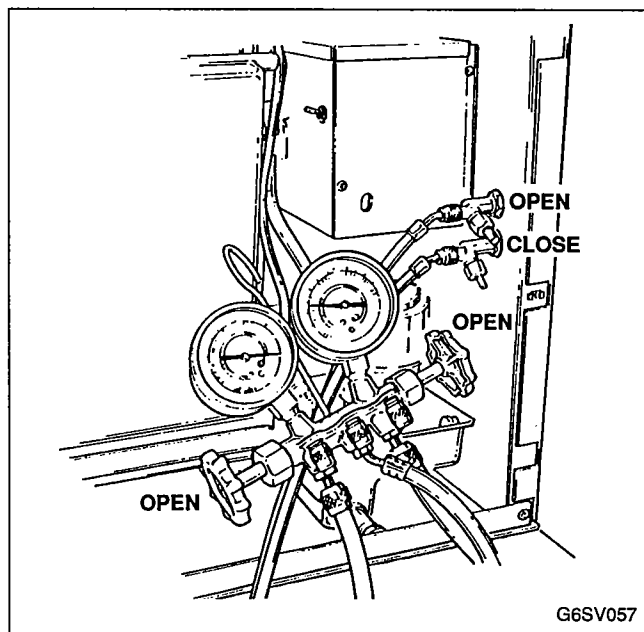


FIGURE 37. INSTALLING MANIFOLD GAUGES

1. Connect high side line to high side service valve at ice machine. See Figure 37.
2. Start low side line onto low side service valve at ice machine. Do not tighten.
3. Open both high and low side valves on manifold gauges. Be sure middle feed line is capped.
4. Open high side of machine at service valve. Refrigerant will bleed through manifold gauges up to the closed low side ice machine service valve.

IMPORTANT

Tighten low side line as refrigerant bleeds through. This purges contaminants and noncondensables from manifold and hoses.

READING OPERATIONAL PRESSURES

1. Close both high and low side valves on manifold gauge set.

2. Open both high and low side service valves at the ice machine.
3. With machine operating, read high and low side pressures on gauges.

REMOVAL OF MANIFOLD GAUGES

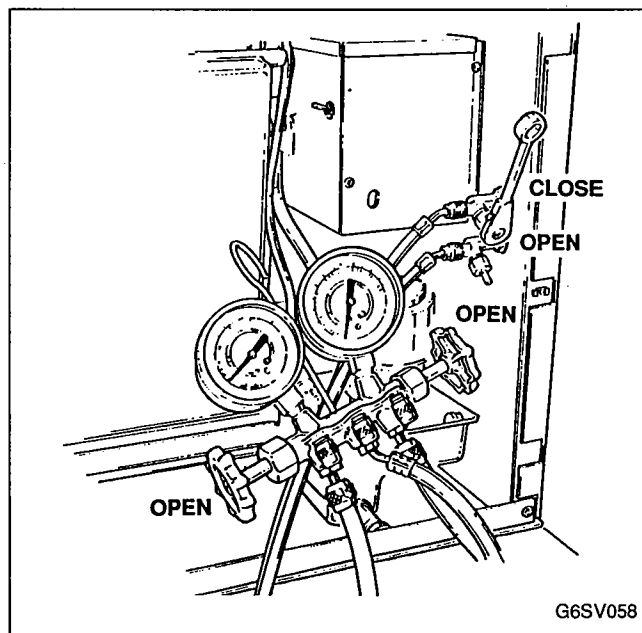


FIGURE 38. REMOVAL OF MANIFOLD GAUGES

1. Run ice machine in freeze cycle.
2. Close high side service valve at ice machine.
3. Open low side service valve at ice machine.
4. Open both high and low side valves on manifold gauge set. Refrigerant in lines will now be pulled into the low side of system. Allow pressures to equalize with ice machine still in freeze cycle.
5. Close low side service valve at ice machine.
6. Remove hoses from ice machine and install caps.

NOTE

Removing manifold properly will ensure you do not alter charge and will eliminate releasing C.F.C.'s into atmosphere.

TXV INSTALLATION

Correct expansion valve installation is essential for proper operation. Some key points to remember when installing a valve include:

SOLDERING IN VALVE

Wrap the TXV with a wet rag. This will prevent damage to the valve from overheating.

BULB LOCATION

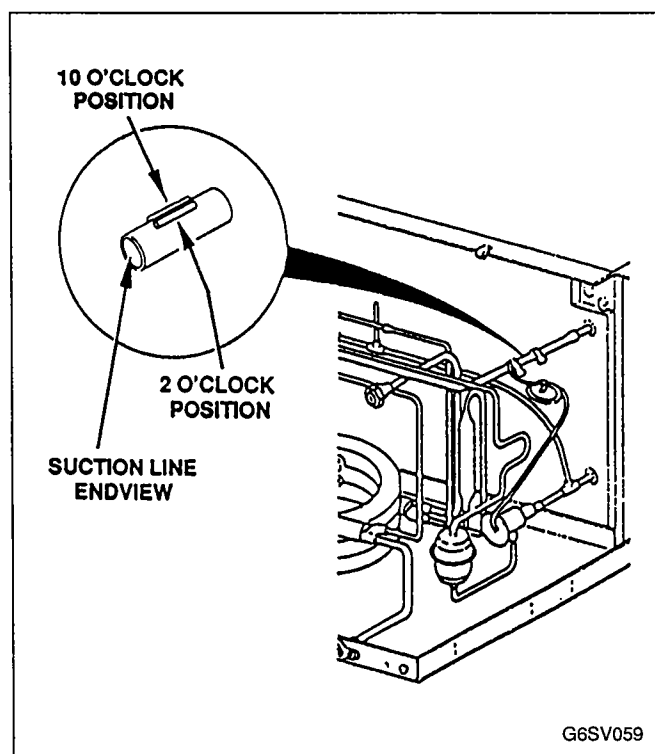


FIGURE 39. TXV BULB LOCATION

Bulb must be clamped to a smooth, straight, clean copper tube, not to a weld joint. Mount the bulb at the 10:00 or 2:00 o'clock position (Figure 39).

BULB CLAMP LOCATION

All Manitowoc expansion valve bulbs are to be mounted with two stainless steel screw clamps (Figure 39). Both clamps must be used. Locate one clamp flush with each end of the bulb. Do not put both clamps in the middle of the bulb, as this can cause the bulb to bow or warp.

BULB CLAMP TIGHTNESS

Bulbs must be tight for good thermal contact. A properly tightened bulb will not move around the suction line when twisted by hand. Properly tightened clamps may slightly deform the bulb. This is normal and will not hurt valve operation.

BULB INSTALLATION CHECK

To check if the bulb has good thermal contact, hold a flashlight under the bulb and look for light between the bulb and the suction line. If no light is seen, the contact is good. If light can be seen between the bulb and the suction line, the contact is poor, and the valve may misfeed. The bulb must be retightened and/or moved slightly and rechecked.

BULB INSULATION

The bulb insulation must be at least 3/8 inch thick. If thinner insulation is used, apply additional layers.

NOTE

Insulate the valve body to prevent sweating.

ALCO REFRIGERATION SOLENOID VALVE (200 RB SERIES) REPLACEMENTS

The internal parts of Alco solenoid valves (200 RB Series) are replaceable without changeout of the brass body. Rebuild kit, Manitowoc part No. 24-0460-3, is available for these Alco solenoid valves. The rebuild kit includes the plunger, spring, O-ring, and piston assembly. A solenoid valve which has a damaged seat or is stuck open or closed can, in most cases, be repaired by installing the rebuild kit. See Figure 40.

Use the following guidelines for warranty replacements.

1. Install rebuild kit when the enclosing tube and brass valve body are **not defective**.
2. Replace the entire solenoid assembly when the brass valve body is found defective or if the internal surface of the enclosing tube does not permit smooth plunger and piston operation.
3. Replace coil only when a coil malfunctions (open, shorts, etc.).

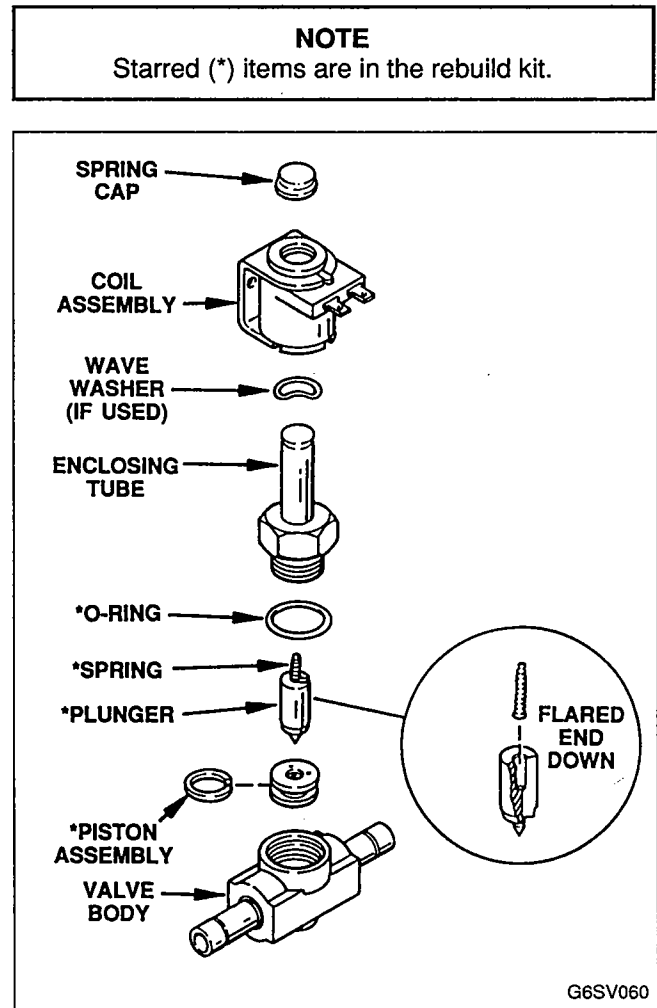


FIGURE 40. REFRIGERATION SOLENOID VALVE

LEAK CHECKING CONDENSER AND WATER REGULATING VALVE

IMPORTANT

Both the condenser and water regulating valve must be leak checked.

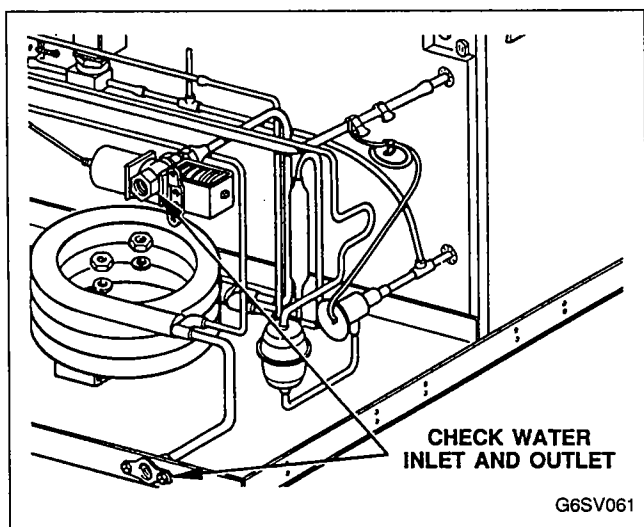


FIGURE 41. CONDENSER LEAK CHECK POINTS

1. Set ICE/OFF/WATER PUMP switch at OFF.
2. Turn off incoming condenser water supply.
3. Disconnect incoming condenser water inlet and outlet lines.
4. Disconnect water regulating valve from condenser.
5. Blow water out of condenser with compressed air.

NOTE

Water in the condenser may cause an electronic leak detector to give a false signal.

6. Ensure refrigeration system is pressurized.
7. Check condenser water inlet and outlet with electronic leak detector. If a leak is detected, replace condenser. See Figure 41.

NOTE

If no leak is detected with the ice machine off, set the ICE/OFF/WATER PUMP switch at ICE. Allow discharge pressure to reach 250 psig, then set ICE/OFF/WATER PUMP switch at OFF and recheck for leaks.

LEAK CHECKING WATER REGULATING VALVE

NOTE

Water regulating valve must be disconnected from the condenser. Completely dry water valve inlet and outlet to eliminate false readings from the leak detector.

1. Ensure refrigeration system is pressurized.
2. Leak check where cap tube meets the bellows housing. See Figure 42.
3. Leak check around bellows seal.
4. Open valve by prying open at spring with screwdriver, leak check inlet and outlet with leak detector. If leak is detected, replace valve.
5. If no leak is detected, refer to NOTE under step 7 of Leak Checking the Condenser and recheck valve for leaks.

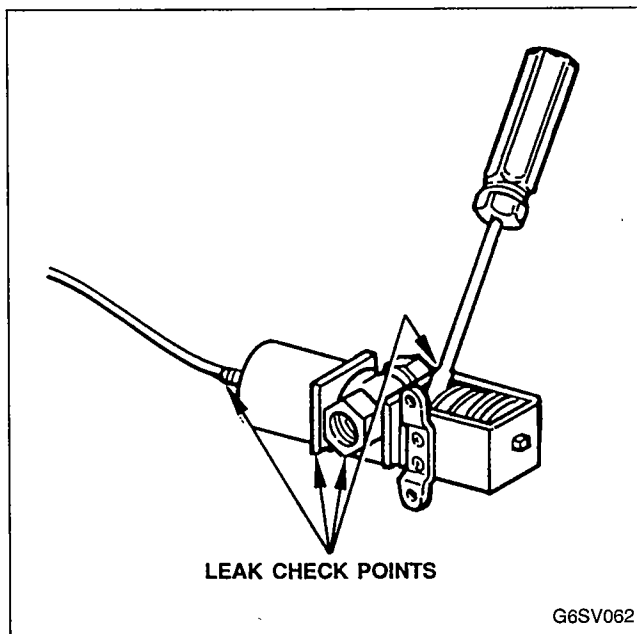


FIGURE 42. WATER REGULATING VALVE LEAK CHECK POINTS

REMOVAL FROM SERVICE/WINTERIZATION

You must take special precautions if the ice machine is to be removed from service for extended periods or exposed to ambient temperatures of 32°F or below.



CAUTION

IF WATER IS ALLOWED TO REMAIN IN THE MACHINE IN FREEZING AMBIENT TEMPERATURES, IT WILL FREEZE, RESULTING IN SEVERE DAMAGE TO COMPONENTS. A FAILURE OF THIS NATURE IS NOT COVERED BY WARRANTY.

Air-Cooled Machines

1. Disconnect electric power at circuit breaker or electric service switch.
2. Turn off water going to ice machine.
3. Remove drain plug from water trough.
4. Disconnect drain line and incoming ice making water line at rear of ice machine.
5. Blow compressed air in both incoming water opening and drain opening in rear of machine until water is no longer coming out of float valve and drain.
6. Ensure that no water is trapped in any of the machine's water lines, drain lines, distribution tubes, etc.
7. If ice machine is outside, cover machine to prevent exposure to elements.

Water-Cooled Machines

1. Perform all procedures listed under Air-Cooled Machines.
2. Disconnect incoming water line and drain line from water-cooled condenser.

3. Pry open water regulating valve by inserting large standard screwdriver between bottom spring coils of valve. Pry spring upward to open valve, Figure 43.
4. Hold valve open and blow compressed air through condenser until no water remains.
5. Ensure no water is trapped in the water lines, drain lines and distribution tube.
6. If ice machine is outside, cover machine to prevent exposure to elements.

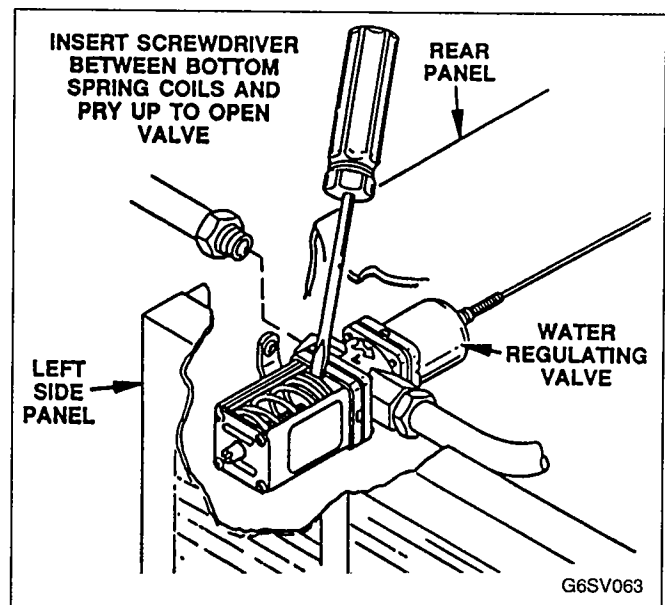


FIGURE 43. MANUALLY OPENING WATER REGULATING VALVE

EVACUATION AND RECHARGING

REMOVAL OF REFRIGERANT

Do not purge the refrigerant to the atmosphere. Recapture refrigerant using recovery equipment by following specific manufacturer's recommendations.

IMPORTANT

Manitowoc Ice, Inc. assumes no responsibility for the use of recycled refrigerant. Damage resulting from the use of recycled refrigerant is solely the responsibility of the servicing company.

GAUGE SET/VACUUM PUMP INSTALLATION PROCEDURE

IMPORTANT

Refer to refrigeration system Contamination Clean-Up Procedures, page 54, for proper clean-up procedures if system contamination is suspected or detected. Improper or insufficient clean-up will lead to repeat failures.

1. Replace liquid line drier.

IMPORTANT

TO PREVENT VOIDING WARRANTY, USE ONLY MANITOWOC (O.E.M.) LIQUID LINE FILTER DRIERS.

2. Fully open service valves.
3. Evacuation of the ice machine requires connections at two points as follows:
 - a. Suction service valve.
 - b. Discharge service valve.Connect manifold gauges, dial-a-charge (or weigh-in method), and vacuum pump to ice machine, Figure 44.

NOTE

Install a two-stage vacuum pump to manifold gauges. A single stage pump will slow the evacuation process.

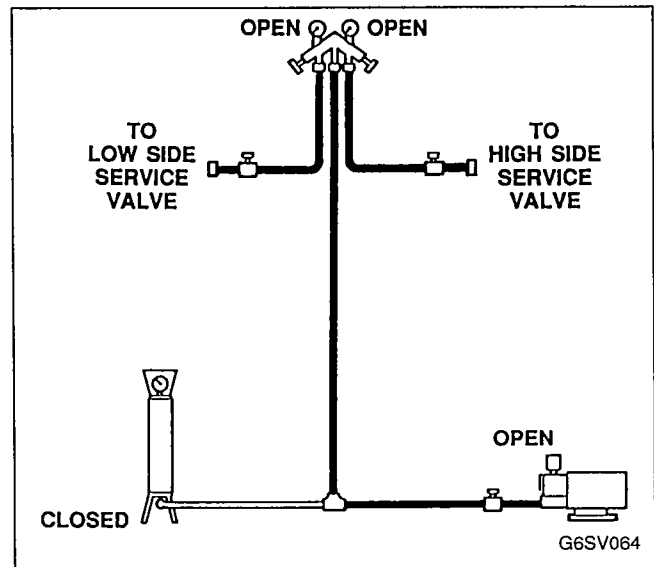


FIGURE 44. EVACUATION OF SELF-CONTAINED SYSTEMS

Procedures for Self-Contained Evacuation

1. Ensure the toggle switch is in the OFF position.
2. Open (backseat) high and low side ice machine service valves. Open vacuum pump valve. Open high and low side on manifold gauges.
3. Start vacuum pump. Pull system down to 250 microns. Allow pump to run for 1/2 hour after reaching 250 microns.
4. Refer to Recharging Procedures and recharge ice machine.

Procedures for Self-Contained Recharging

IMPORTANT

Charge must be weighed or measured into ice machine to assure proper operation under all load conditions. Do not charge by sight glass, pressure, etc.

1. Ensure toggle switch is in OFF position.

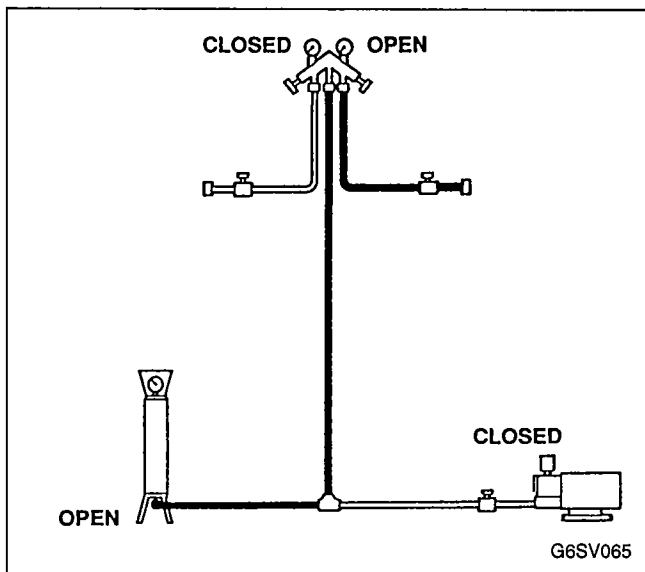


FIGURE 45. RECHARGING OF SELF-CONTAINED SYSTEMS

2. Close vacuum pump valve, low side service valve, and low side valve on manifold gauge.

3. Open high side manifold gauge valve, backseat high side service valve.
4. Open charging cylinder and add measured nameplate charge through discharge service valve.
5. Allow system to "settle" for 2 or 3 minutes after charging.
6. Close high side on manifold gauge set. Place toggle switch in ICE position and add remaining vapor charge through suction service valve (if necessary).
7. Ensure all vapor in charging hoses is drawn into the ice machine before disconnecting manifold gauges. Refer to How to Use Manifold Gauges, page 47.

NOTE

Recheck for leaks with a Halide or electronic leak detector after recharging ice machine.

SEVERE SYSTEM CONTAMINATION

GENERAL

It is important to read and understand the following text regarding severe system contamination. The purpose is to describe the basic requirements for restoring contaminated systems to reliable service.

IMPORTANT

Manitowoc Ice, Inc. assumes no responsibility for the use of recycled refrigerant. Damage resulting from the use of recycled refrigerant is solely the responsibility of the servicing company.

DETERMINING SEVERITY OF CONTAMINATION AND CLEAN-UP PROCEDURES

System contamination is generally caused by the introduction of either moisture or residue from compressor burnout into the refrigeration system.

Inspection of the refrigerant is usually the first indication of contaminants in the system. If obvious moisture or an acrid odor indicating burnout is present in the refrigerant, steps must be taken to determine the severity of contamination as well as the required clean-up procedure.

If visible moisture or an acrid odor is detected, or if contamination *is suspected*, the use of a Total Test Kit from Totaline or similar diagnostic tool is recommended. These devices read refrigerant, therefore eliminating the need for an initial oil sample for testing.

If a refrigerant test kit indicates harmful levels of contamination, or if the kit is not available, then inspect the compressor oil as follows:

1. Remove refrigerant charge from ice machine.
2. Remove compressor from the system.
3. Check odor and condition (appearance) of the oil.
4. Inspect open suction and discharge lines at compressor for burnout deposits.
5. Perform an acid oil test if contamination signs are not evident per the above procedure to ensure no harmful contamination is present.

The following chart lists findings and matches them with required clean-up procedure. Use this chart for determining type of clean-up required.

CONTAMINATION/CLEAN-UP CHART

Symptoms/Findings	Required Clean-Up Procedure
No symptoms or suspicion of contamination	Normal evacuation and recharging procedures, page 52.
Moisture/Air Contamination (one or more of the following conditions will exist) — Refrigeration system open to atmosphere for prolonged periods — Refrigeration test kit and/or acid oil test shows contamination — Leak in water-cooled condenser — Oil appears muddy, or visible moisture in oil	Mild contamination clean-up procedures, page 55.
Mild Compressor Burnout — Oil appears clean with acrid odor and/or — Refrigeration test kit or acid oil test shows harmful acid content — No burnout deposits in open compressor lines	Mild contamination clean-up procedures, page 55.
Severe Compressor Burnout — Oil discolored and acidic with acrid odor, burnout deposits in compressor, discharge and suction lines and other components	Severe contamination clean-up procedures, page 55.

MILD SYSTEM CONTAMINATION CLEAN-UP PROCEDURES

1. Replace failed components if applicable. If compressor checks good, change oil in compressor.
2. Replace liquid line drier.
3. Follow normal evacuation procedure, page 52, except replace the evacuation step with the following:

NOTE

If contamination is from moisture, the use of heat lamps or heaters is recommended during evacuation. Place heat lamps at the compressor, condenser, and at the evaporator prior to evacuation. (Ensure heat lamps are not positioned too close to plastic components such as evaporator extrusions, water trough, etc., as they could melt, warp, etc.)

IMPORTANT

Dry nitrogen is recommended for this procedure to prevent C.F.C. release into the atmosphere.

- a. Pull vacuum to 1000 microns. Break vacuum with dry nitrogen and sweep system. Pressurize to a minimum of 5 psig.
 - b. Pull vacuum to 500 microns. Break vacuum with dry nitrogen and sweep system. Pressurize to a minimum of 5 psig.
 - c. Change vacuum pump oil. Pull system down to 250 microns. When 250 microns have been achieved, allow vacuum pump to run for 1/2 hour on self-contained models, 1 hour for remotes. A standing vacuum test may be performed at this time as a preliminary means of leak checking; however, the use of an electronic leak detector after the system has been charged is recommended.
4. Charge system with proper refrigerant to nameplate charge.
 5. Operate ice machine.

SEVERE SYSTEM CONTAMINATION CLEAN-UP PROCEDURES

1. Remove refrigerant charge.
2. Remove compressor.
3. Disassemble hot gas solenoid valve. If burnout deposits are found inside valve, install rebuild kit and replace TXV. If contaminants are found replace harvest pressure limiter control.
4. Check discharge and suction lines at compressor for burnout deposits. Wipe out as necessary.

5. Sweep through open system with dry nitrogen.

NOTE

Refrigerant sweeps are not recommended, as they release C.F.C.'s into the atmosphere.

6. Installation Procedures:

- a. Install new compressor and start components.
- b. Install an adequately sized suction line filter-drier with acid/moisture removal capability and inlet/outlet access valves. Place the filter-drier as close to the compressor as practical.
- c. Replace liquid line filter-drier.

7. Follow normal evacuation procedures, page 52, except replace the evacuation step with the following:

IMPORTANT

Dry nitrogen is recommended for this procedure to prevent C.F.C. release into the atmosphere.

- a. Pull vacuum to 1000 microns. Break vacuum with dry nitrogen and sweep system. Pressurize to a minimum of 5 psig.
 - b. Change vacuum pump oil. Pull vacuum to 500 microns. Break vacuum with dry nitrogen and sweep system. Pressurize to a minimum of 5 psig.
 - c. Change vacuum pump oil. Pull system down to 250 microns. When 250 microns have been achieved, allow vacuum pump to run for 1/2 hour for self-contained models, 1 hour for remotes. A standing vacuum test may be performed at this time as a preliminary means of leak checking; however, the use of an electronic leak detector after the system has been charged is recommended.
8. Charge system with proper refrigerant to nameplate charge.
 9. Operate ice machine.
 - a. Check pressure drop across the suction line filter-drier after 1 hour running time. If pressure drop is not excessive (up to 1 psig differential) the filter-drier should be adequate for complete clean-up. Proceed to step 10.
 - b. If pressure drop is greater than 1 psig after 1 hour run time, change the suction line filter-drier and liquid line drier. Repeat until ice machine will run 1 hour without pressure drop.
 10. Remove suction line filter-drier after 48-72 hours run time. Change liquid line drier and follow normal evacuation procedures, page 52.



MANITOWOC ICE, INC.

2110 South 26th Street P.O. Box 1720
Manitowoc, WI 54221-1720

Phone: (920) 682-0161

Fax: (920) 683-7585

Web Site: www.manitowocice.com

© 1999 Manitowoc Ice, Inc.
Litho in U.S.A.