


# 1. KM-81BAJ, KM-116BAJ, KM-161BAJ, KM-161BWJ

S1 DIP SWITCH SETTINGS										
SWITCH No.	1	2	3	4	5	6	7	8	9	10
KM-81BAJ	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON
KM-116BAJ	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON
KM-161BAJ	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF	ON
KM-161BWJ	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	OFF


S2 DIP SWITCH SETTINGS						
SWITCH No.	1	2	3	4	5	6
KM-81BAJ	OFF	OFF	OFF	OFF	OFF	ON
KM-116BAJ	OFF	OFF	OFF	OFF	OFF	ON
KM-161BAJ	OFF	OFF	OFF	OFF	OFF	ON
KM-161BWJ	OFF	OFF	OFF	OFF	OFF	ON

COMPRESSOR CAPACITOR TABLE	
MODEL	START CAP.
KM-116BAJ	100MFD
KM-161BAJ	189-227MFD

WIRE	COLOR CODE
BK	-BLACK
BR	-BROWN
BU	-BLUE
DBU	-DARK BLUE
GR	-GREEN
GY	-GRAY
LBU	-LIGHT BLUE
O	-ORANGE
P	-PINK
R	-RED
V	-VIOLET
W	-WHITE

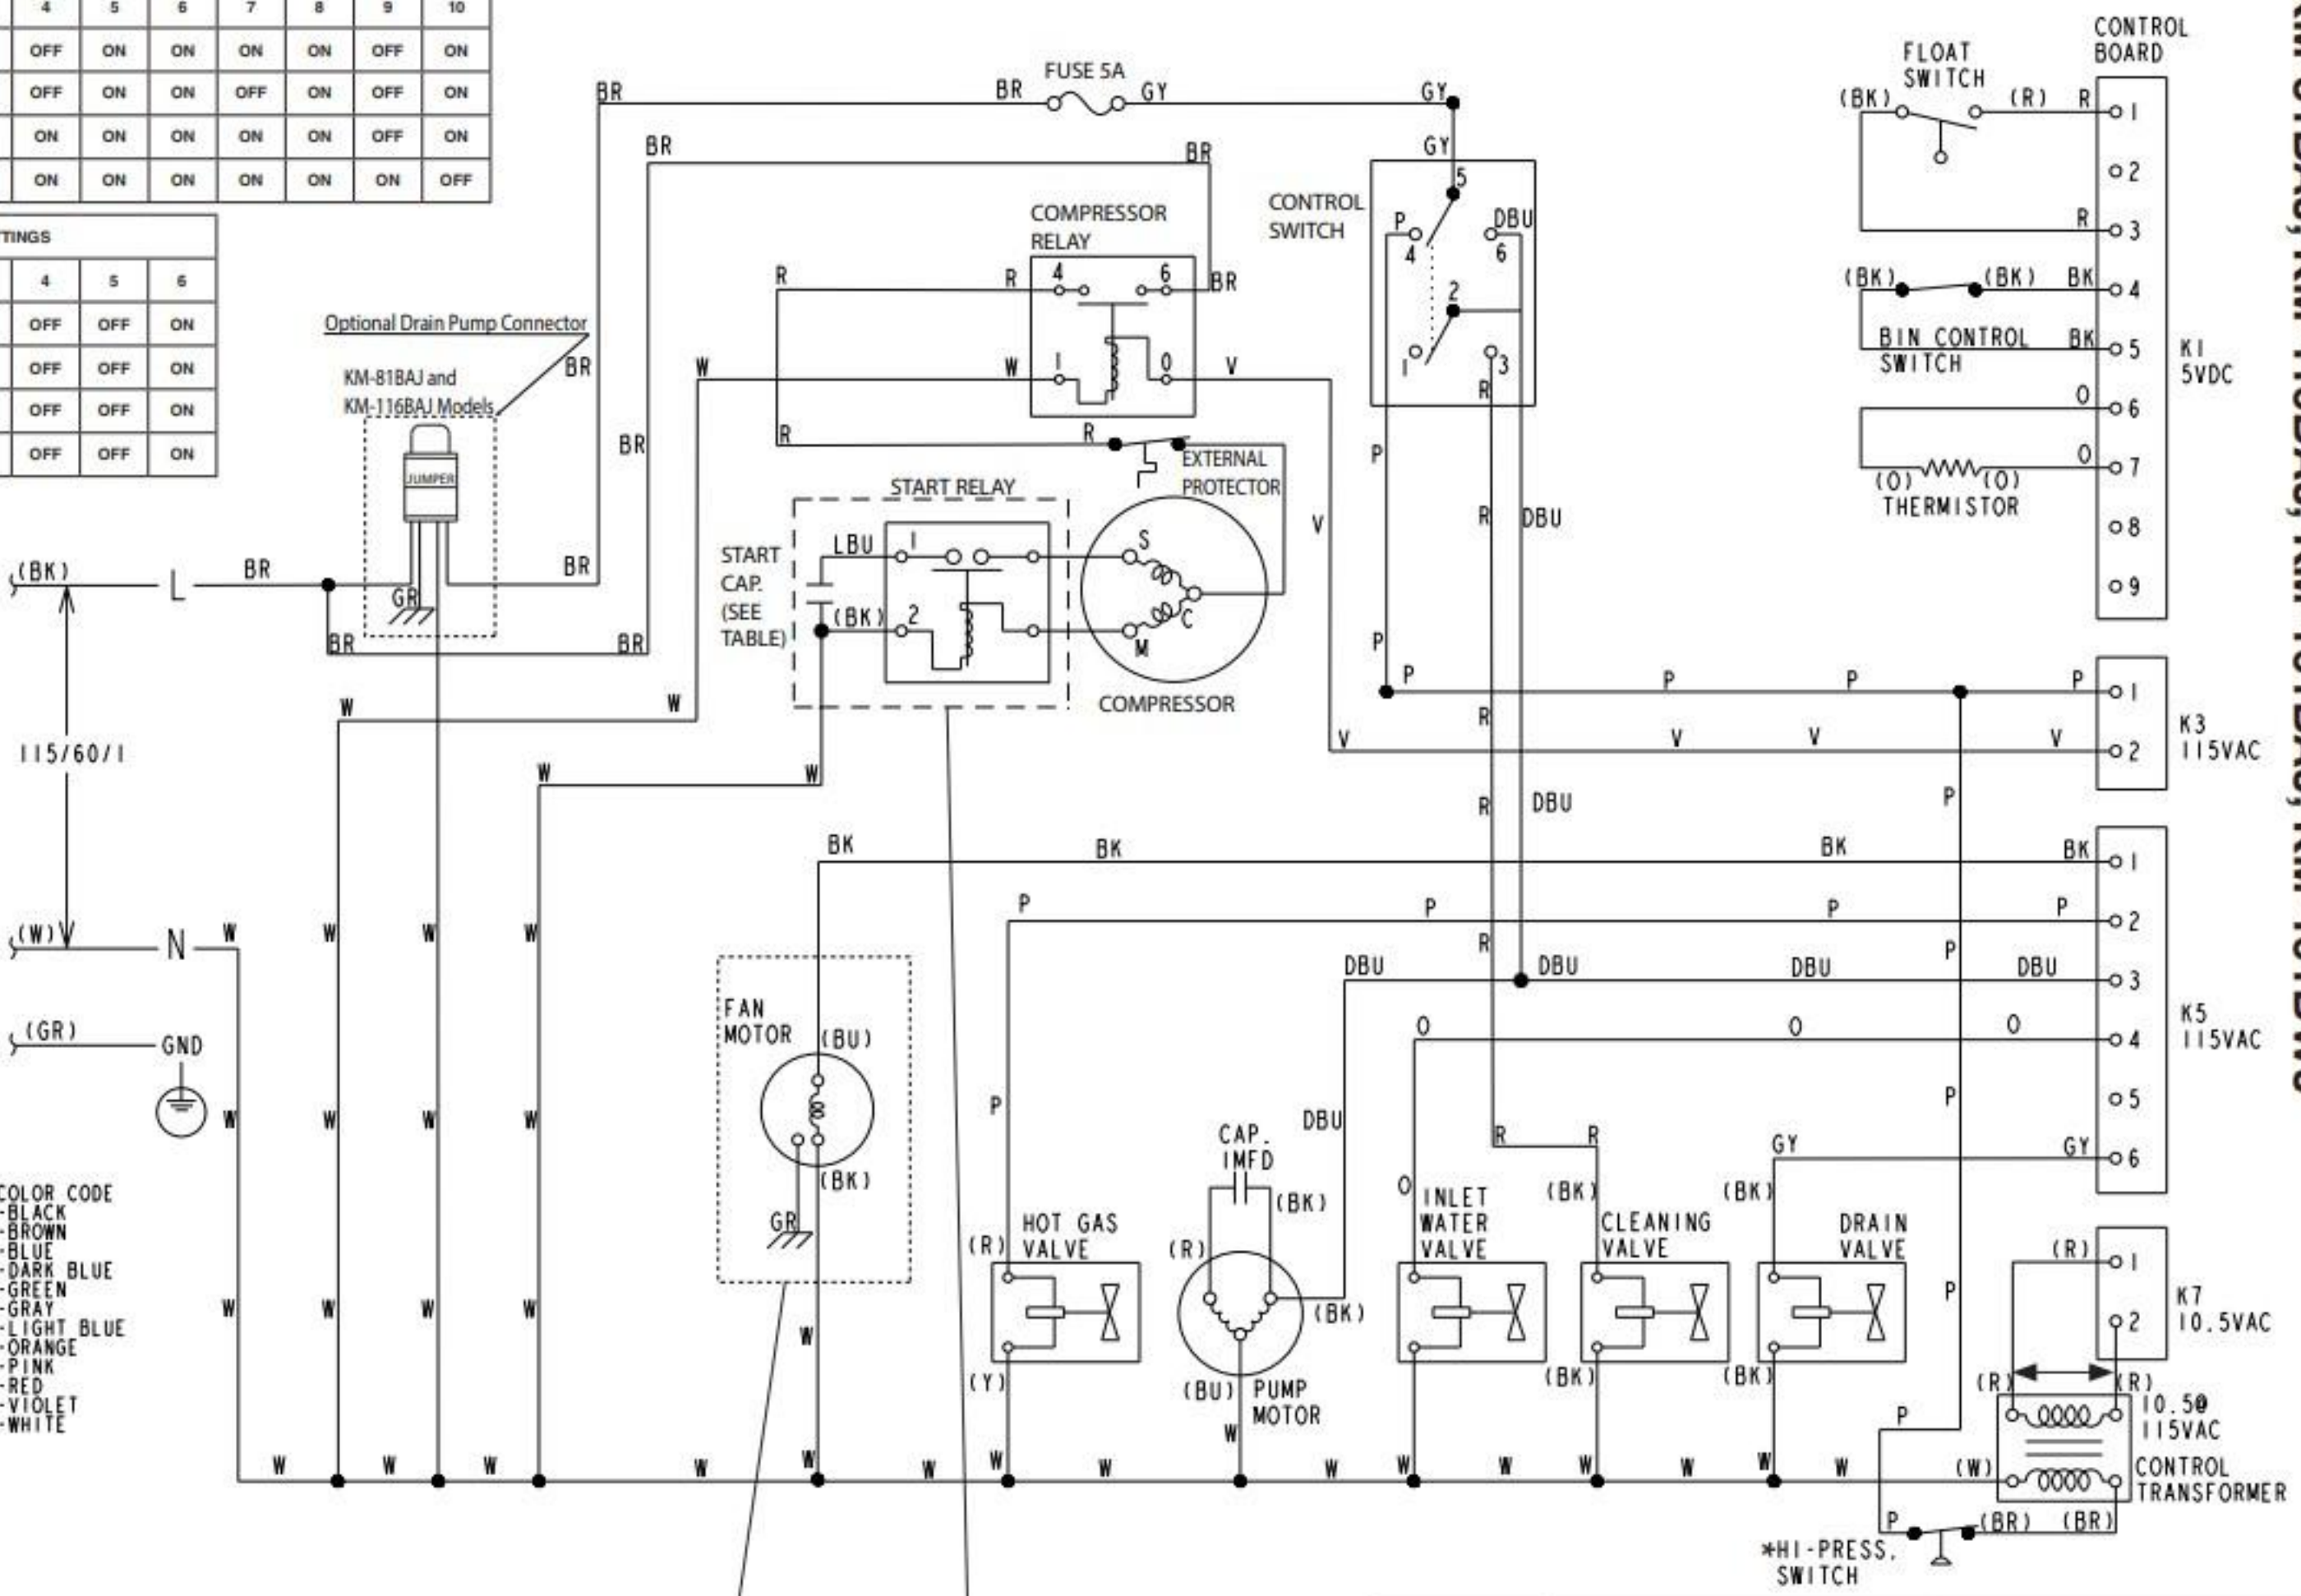

MODEL	FAN MOTOR
KM-81BAJ	CONDENSER FAN MOTOR
KM-116BAJ	CONDENSER FAN MOTOR
KM-161BAJ	CONDENSER FAN MOTOR
KM-161BWJ	CABINET FAN MOTOR

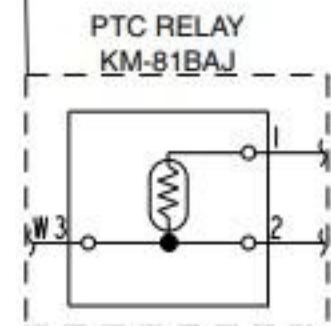

* High-Pressure Switch		
	Air-Cooled Model	Water-Cooled Model
Cut-out	412± <sup>22</sup> <sub>0</sub> PSIG	384± <sup>22</sup> <sub>0</sub> PSIG
Cut-in	327±22 PSIG	284±22 PSIG