



1. External Parts

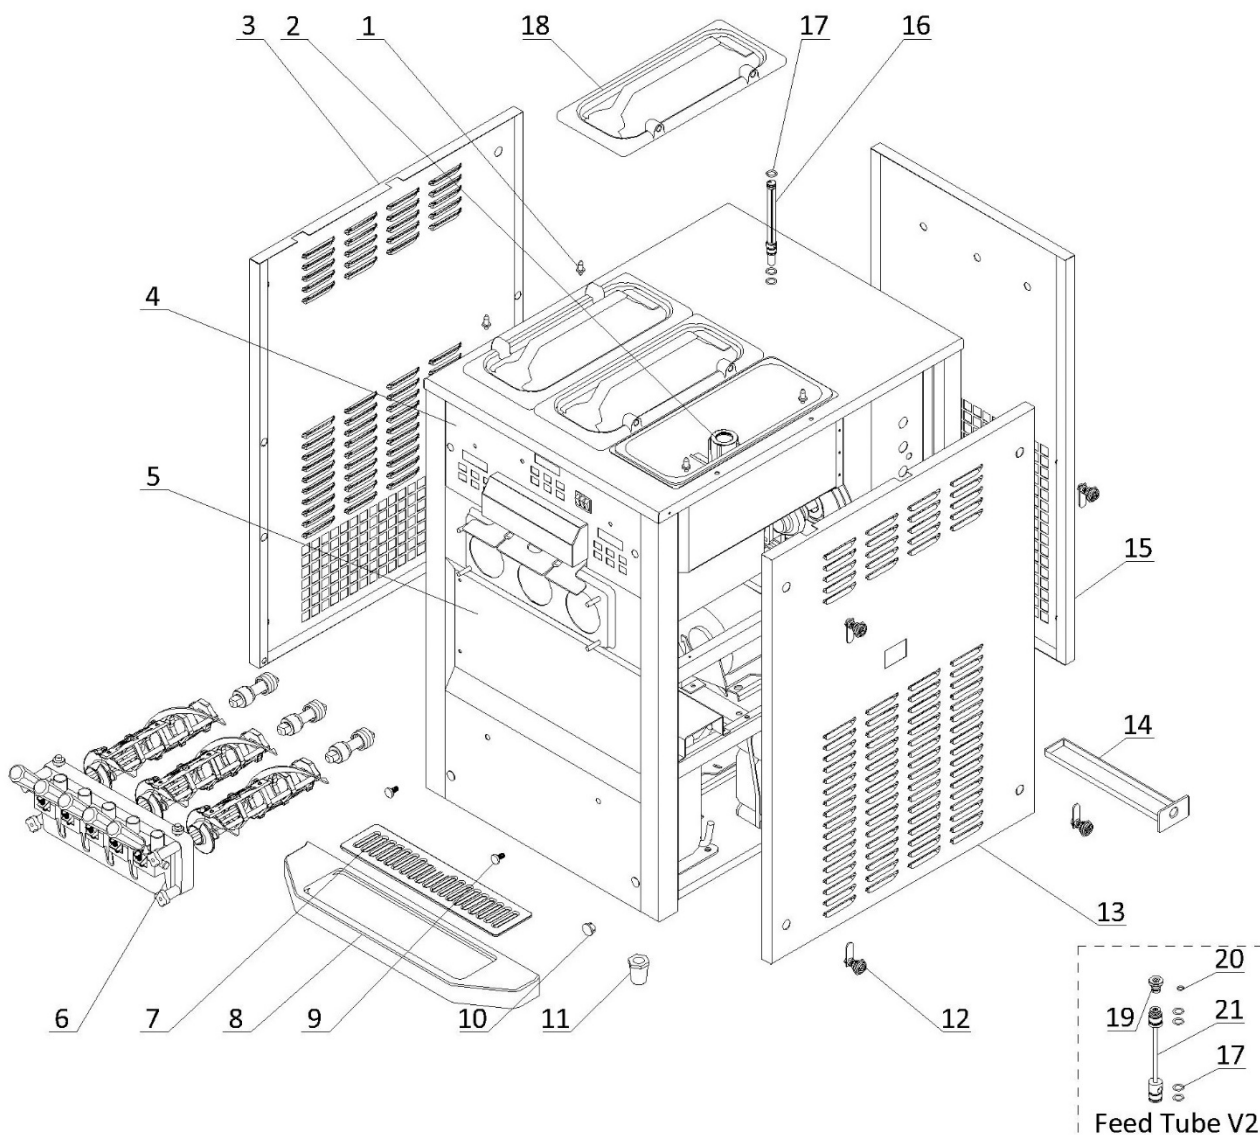

1. External Parts

Item	Part Number	Description	Qty.
1	3.6.39.011	Hopper Lid Holder	4
2	Page 8	Hopper Agitator	1
3	2.3.4.18.014	Panel - Left - 6265	1
4	Page 7	Draw Switch and Front Control Panel	1
5	2.3.4.17.012	Panel - Lower Front - 6265	1
6	Page 5	Dispensing Door and Beater	1
7	3.4.04.01.008-1	Splash Shield - Front Drip Tray - 55mm	1
8	3.4.04.01.008	Front Drip Tray - 55mm	1
9	3.6.39.004	Drip Tray Mounting Bolt	2
10	3.4.07.01.001	Bolt Hole Cover	4
11	3.3.05.03.001	Leg - 45mm	4
12	8.1.07.001	Panel Lock Assembly	12
13	2.3.4.20.011	Panel - Right - 6265	1
14	3.4.04.02.001	Internal Drip Tray - 45mm	1
15	2.3.4.13.009	Panel - Rear - 6265	1
16	2.1.3.39.0011	Air Tube - SS - Long - V3	3
17	3.4.08.01.002	O-Ring - 18x2.2	9
18	3.4.03.01.002	Hopper Lid - 8L Narrow	3
19	2.1.3.23.0001	Air Tube Cap - SS - Small (Old Version)	3
20	3.4.08.01.028	O-Ring - 6.2x1.9 (Old Version)	3
21	3.4.07.04.020	Air Tube - SS - Long - V2 (Old Version)	3


2. Internal Parts

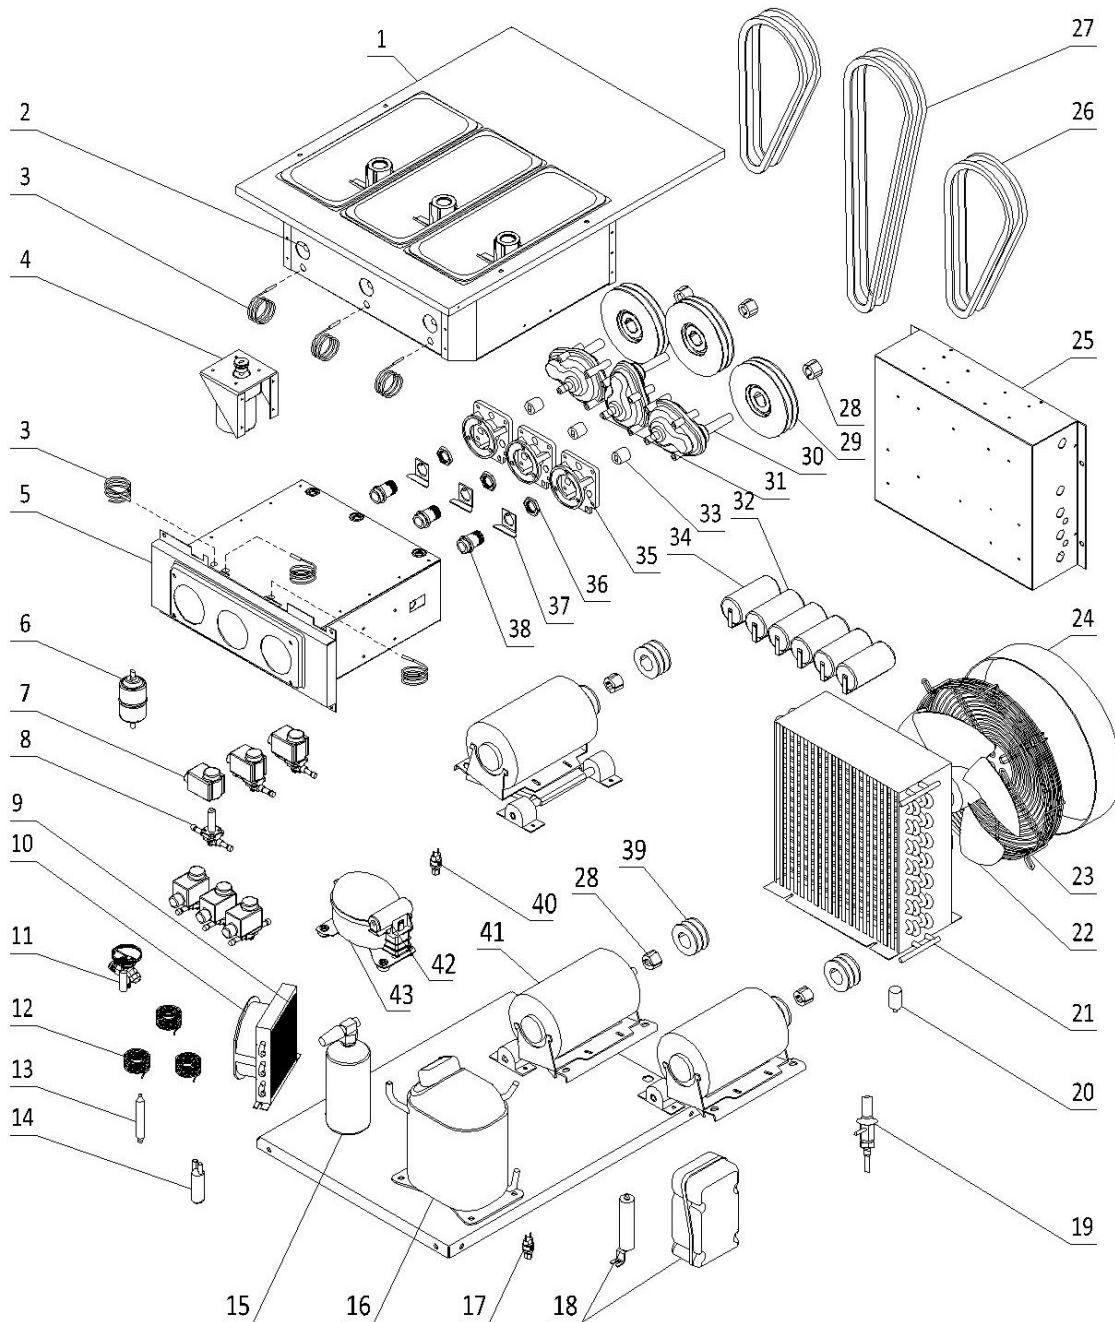

2. Internal Parts

Item	Part Number	Description	Qty.
1	2.1.1.03.0046	Hopper Assembly - 6265	1
2	920.1.04.0002	Mix Low Sensor Assembly	3
3	3.1.02.13.020	Temperature Probe - PT100	6
4	Page 8	Agitator Motor Assembly	1
5	2.1.1.06.0052	Cylinder Assembly - 6265/6268	1
6	3.2.04.05.002	Filter Drier - Cylinder - DML083S	1
7	3.2.04.04.015	Solenoid Coil - 1068	6
8	3.2.04.04.002	Solenoid Valve Body - 1068	6
9	3.2.02.01.001	Auxiliary Condenser - Single - 0.7m ²	1
10	3.2.03.01.001	Fan Motor - BT220-15050S2HL	1
11	3.2.04.01.001	Thermal Expansion Valve - T2	1
12	3.2.05.01.002	Capillary Tube - 2x0.7	3
13	3.2.04.05.001	Filter Drier - Hopper - 16x2.2x120	1
14	3.2.04.07.001	Suction Accumulator - 25x100x0.6	1
15	3.2.04.08.001	liquid Receiver - 76x280	1
16	3.2.01.02.005.A	Primary Compressor - CAJ2464Z	1
17	3.2.04.06.004	High Pressure Switch - 350~500psi	1
18	3.2.01.04.004	Start Component - Compressor - CAJ2464Z	1
19	3.2.04.01.003	Hot Gas Bypass - ACP-4	1
20	3.2.03.04.001-2	Capacitor - Fan Motor - 450V - 5μF - CBB60	1
21	3.2.02.01.007	Main Condenser - Single - 10m ²	1
22/23	3.2.03.04.001	Fan Motor - 220/60/1 - YWF4E-350S	1
24	2.1.3.50.0002	Fan Shroud - 120mm	1
25	Page 10	Electrical Box	1
26	3.3.03.03.012	Belt - Motor - Beater - V-A1422	2
27	3.3.03.03.004	Belt - Motor - Beater - V-A710	4
28	3.3.04.01.005	Bushing - 1008-16	6
29	3.3.04.02.013	Pulley - Gear Box - SPA160-2-1008	3
30	3.3.02.01.023	Gear Box - SS - 45*20 Shaft - 89mm	2
31	3.3.02.01.025	Gear Box - SS - 75*20 Shaft - 89mm	1
32	3.1.02.22.061	Capacitor - Start - 330V - 267.5μF	3
33	3.3.02.04.005	Coupling Drive - 1.3-1.8qt - 20mm	3
34	3.1.02.22.009	Capacitor - Running - 370V - 25μF	3
35	2.1.3.15.0009	Bracket - Gear Box - 1.3-1.8qt - 89mm	3
36	3.3.02.02.010	Nut - Rear Shell Bearing	3
37	2.3.6.04.029	Lock Plate - Rear Shell Bearing - 39mm	3
38	3.3.02.02.001	Rear Shell Bearing - SS - 1.3/1.8qt	3
39	3.3.04.02.001	Pulley - Beater Motor - SPA63-2-1008	3
40	3.2.04.06.003	High Pressure Switch - 250~350psi	1
41	3.3.01.05.003	Motor - 220/60/1 - 900W - K56AC63F41	1
42	3.2.01.01.003-1	Start Component - Compressor - TL4G	1
43	3.2.01.01.003.A	Auxiliary Compressor - TL4G	1


3. Dispensing Door and Beater

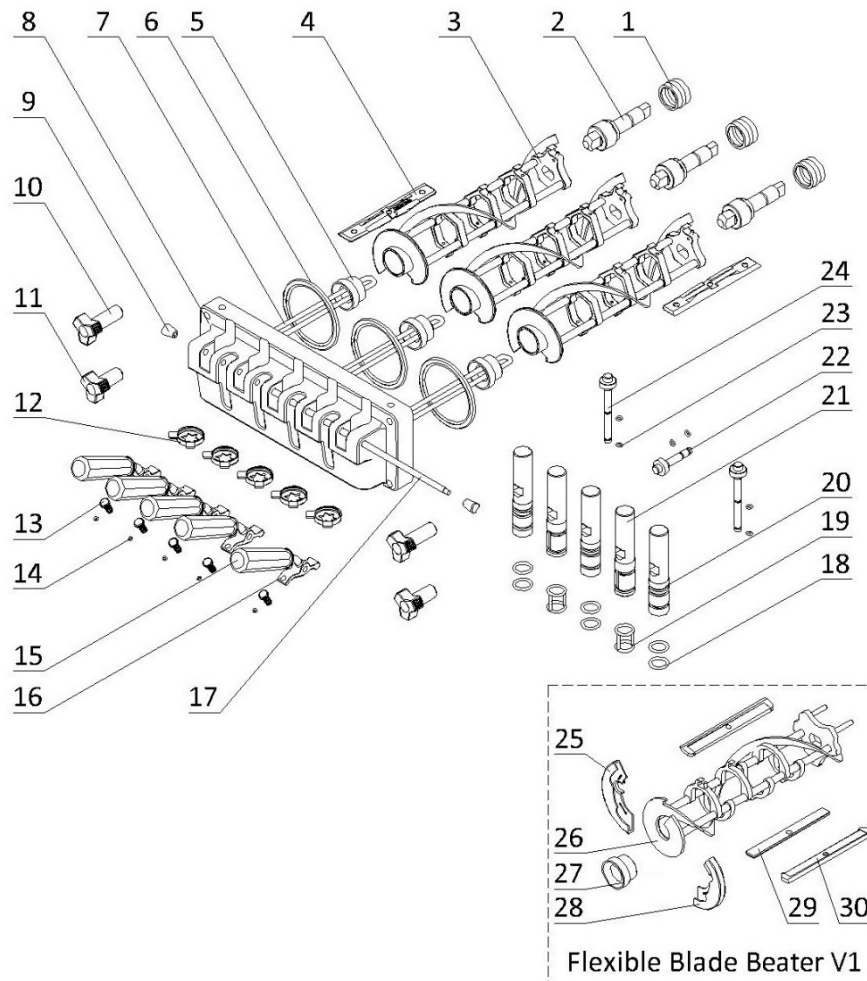

3. Dispensing Door and Beater


Item	Part Number	Description	Qty.
1	3.4.07.05.002	Gasket - Drive Shaft	3
2	2.1.3.25.0001	Drive Shaft - SS - 1.3-1.8qt	3
3	2.1.1.10.0017	Beater - SS - Medium - 1.8qt - V2	3
4	3.4.02.01.005	Scraper Blade - Small - V2	6
5	3.4.01.03.009	Beater Guide - SS - 6265/6268 - V2	3
6	3.4.08.02.007	Door Gasket - SS - 1.3-1.8qt	3
7	2.1.1.11.0001	Beater Rod - SS - 1.8qt	3
8	2.1.3.14.0007	Dispensing Door - SS - 3F - 1.8qt	1
9	2.1.3.27.0025	Nut - Retention Pin - Handle	2
10	3.4.05.02.010	Hand Screw - Long - Dispensing - 1.8qt	2
11	3.4.05.02.008	Hand Screw - Short - Dispensing - 1.8qt	2
12	3.4.05.03.005	Design Cap - Double Triangle - 37mm	5
13	3.6.39.009	Adjustment Screw - Handle - 22mm	5
14	3.4.08.01.012	O-Ring - 3x1.5	5
15	3.4.05.01.001	Handle - Dispensing - SS	5
16	2.1.3.26.0001	Seat - Handle - 2F - 1.3-1.8qt	5
17	2.1.3.27.0005	Retention Pin - Handle - 3F - 1.8qt	1
18	3.4.08.01.011	O-Ring - 19x3	6
19	3.4.08.01.019	H-Ring - 19x3x2	2
20	2.1.3.01.0008	Draw Valve - SS - 3F - 1.8qt - Side	3
21	2.1.3.02.0004	Draw Valve - SS - 3F - 1.8qt - Middle	2
22	2.1.3.02.0017	Prime Plug - SS - Front	1
23	3.4.08.01.013	O-Ring - 5.2x1.9	6
24	2.1.3.02.0015	Prime Plug - SS - Standard	2
25	3.4.01.01.002	Shoe - Left Small - 1.3-1.8qt (Old Version)	3
26	2.1.1.10.0002	Beater - SS - Medium - 1.8qt (Old Version)	3
27	3.4.01.03.001	Beater Guide - SS - 1.3-1.8qt (Old Version)	3
28	3.4.01.02.002	Shoe - Right Small - 1.3-1.8qt (Old Version)	3
29	2.3.4.04.001	Clip - Scraper Blade - 1.8qt (Old Version)	6
30	3.4.02.01.002	Plastic - Scraper Blade - 1.8qt (Old Version)	6

4. Draw Switch and Front Control Panel

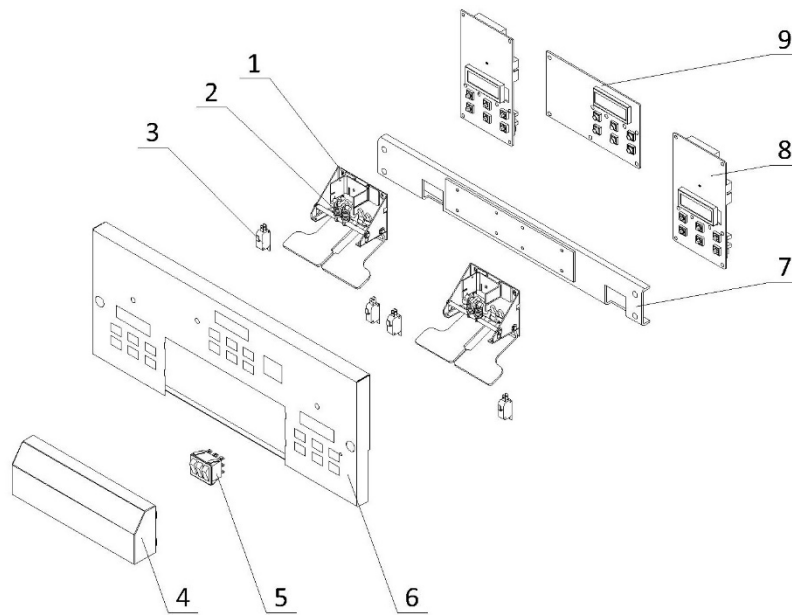


Item	Part Number	Description	Qty.
1	2.1.1.19.0009	Draw Switch Assembly - 3F	2
2	3.6.02.002	Spring - Draw Switch Assembly	4
3	3.1.03.01.004	Micro Switch - KW-7-9	4
4	3.4.07.07.006	Switch Cover - Large - 3F	1
5	3.1.03.03.005	Power Switch - Triple	1
6	2.3.4.07.012	Panel - Draw Switch - 6265/6268	1
7	2.2.4.24.0003	Bracket - Draw Switch Assembly - 2F/3F -1.8qt	1
8	2.2.1.01.0004	Control Board - SS - V2.152 - Standard	2
9	2.2.1.01.0009	Control Board - SS - V2.152 - 6265/6268	1

5. Hopper Agitator

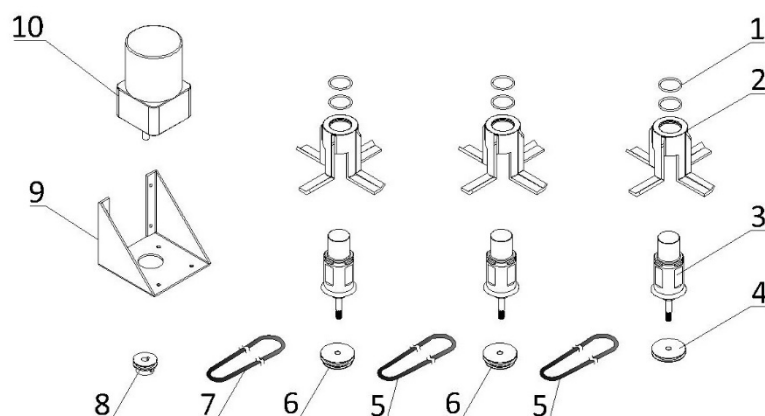

Item	Part Number	Description	Qty.
1	3.4.08.01.034	O-Ring - 31x2	6
2	2.1.1.23.0002	Blade - Hopper Agitator - Standard - V2	3
3	2.1.1.12.0002	Agitator Assembly - 137mm	3
4	2.1.4.02.015	Pulley - Hopper Agitator - Single - 53mm	1
5	2.1.4.08.048	Belt - Hopper Agitator - 480mm	2
6	2.1.4.02.016	Pulley - Hopper Agitator - Double - 53mm	2
7	2.1.4.08.049	Belt - Hopper Agitator - 315mm	1
8	3.3.04.04.005	Pulley - Hopper Agitator - Drive - 38.9mm	1
9	2.3.4.45.076	Bracket - Agitator Motor - 81mm	1
10	3.3.01.01.006	Motor - Agitator - 220V - YN80-25-6G	1

6. Electrical Box

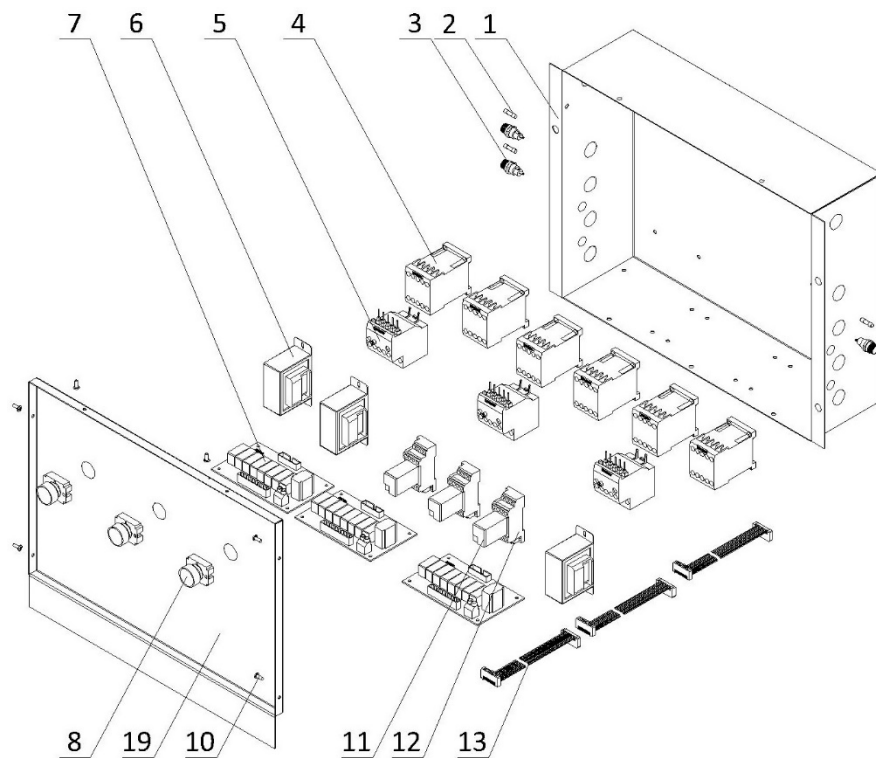

Item	Part Number	Description	Qty.
1	2.2.4.17.0013	Electrical Box - 6265	1
2	3.1.02.08.002	Fuse - 0.5A	3
3	3.1.02.08.012	Seat - Fuse - 250V	3
4	3.1.01.01.010	Contactor - 220V - 3RT6017-1AN21	6
5	3.1.01.02.011	Thermal Overload Relay - 3RU6116-1GB0	3
6	3.1.01.04.007	Transformer - 50W - 50313MW232	3
7	2.2.1.01.0007	Power Board - SS - V2.152	3
8	3.1.03.04.002	Reset Button - Thermal Overload	3
9	2.2.4.20.0013	Cover - Electrical Box - 6265	1
10	3.6.19.001	Screw - M4×8	6
11	3.1.01.03.029	Intermediate Relay - AC220V - HH54P-L	3
12	3.1.01.03.031	Base - Relay - TP514X1-E	3
13	3.1.04.01.003	Ribbon Cable - 20 Pin	3