

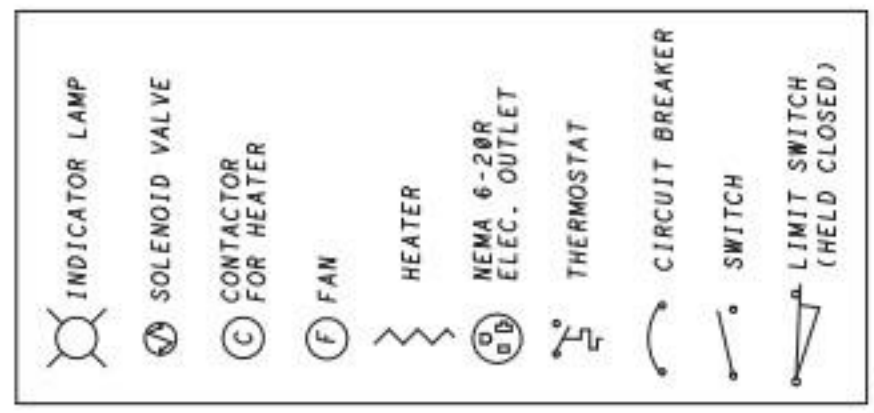
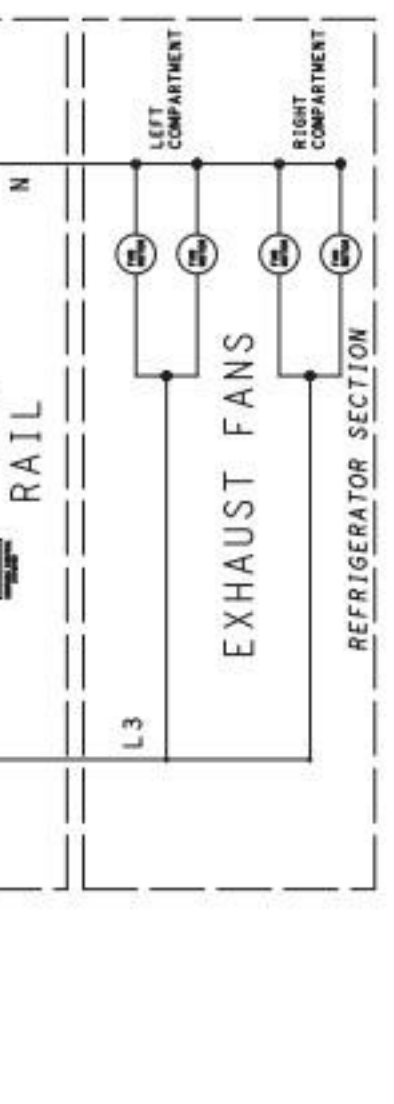
LOADS		BLACK	RED	BLUE
	L1	L2	L3	
				33.6
				33.6
				16.8
				16.4
				84.0
				83.6

ITEM	ITEM	BLACK/BLACK RED 12 GA	RED/BLUE 12 GA	BLACK/BLACK BLUE 12 GA	BLACK/BLACK RED 12 GA
② HEATER, 16.8A	⑤ LL WOK, 16.8A	①	②	③	④
"	"	②	③	④	⑤
③ HEATER, 16.8A	⑥ LC WOK, 16.8A	③	④	⑤	⑥
"	"	④	⑤	⑥	⑦
④ HEATER, 16.8A	⑦ RC WOK, 16.8A	⑤	⑥	⑦	⑧
"	"	⑥	⑦	⑧	⑨
OPEN-----	⑧ RR WOK, 16.8A	⑦	⑧	⑨	⑩
OPEN-----	"	⑧	⑨	⑩	⑪
① REF 'G/FANS, 16.4A	OPEN	⑨	⑩	⑪	⑫

NOTE : FULL LOAD AMPS INCLUDES 100% OF RATED AMPERAGE FOR DUPLEX RECEPITS. AND 80% FOR SINGLE RECEPITS



15 AMP CIRCUITS USE 14 GA. WIRE  
 16-20 AMP CIRCUITS USE 12 GA. WIRE  
 21-30 AMP CIRCUITS USE 10 GA. WIRE

GREEN WIRE FOR GROUNDING ONLY  
 WHITE WIRE FOR 120V NEUTRAL ONLY  
 USE 2 OTHER COLORED WIRES FOR 220V