
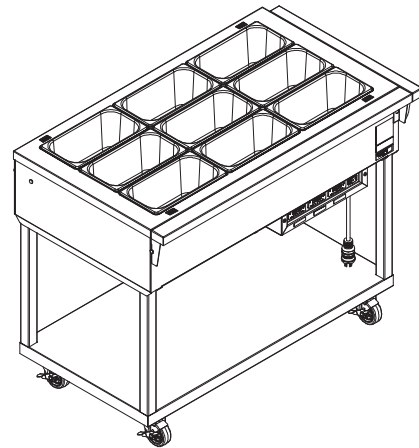
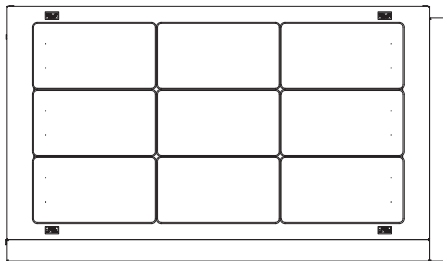



TECHNICIAN'S QUICK REFERENCE GUIDE -

DOCUMENT PART NUMBER
19019722
REV A, Jul 2, 2024

UNIVERSAL DRY WELLS

MODEL #:	Universal Dual Line Dry Well	Universal Single Line Dry Well
PART #:	18030030	18030031

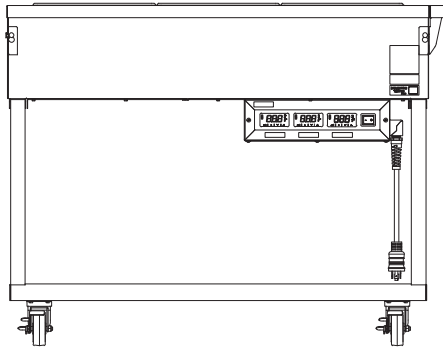

Universal Dual Line Dry Well (18030030) Shown

WARNING!

THESE INSTRUCTIONS ARE INTENDED FOR QUALIFIED PERSONS ONLY. IF YOU ARE NOT A CERTIFIED TECHNICIAN OR TRADES PERSON WITH THE REQUISITE KNOWLEDGE, SKILLS, ABILITY, AND TRAINING, DO NOT ATTEMPT SERVICE OR INSTALLATION YOURSELF. SERVICE BY UNQUALIFIED PERSONS COULD RESULT IN PROPERTY DAMAGE, INJURY, OR DEATH. SERVICE BY NON-AUTHORIZED PERSONS, OR THE USE OF NON-OEM PARTS, MAY VOID WARRANTY. READ THESE INSTRUCTIONS AND ALL SERVICE DOCUMENTS, AND ALL OTHER DOCUMENTS THAT SHIPPED WITH THE EQUIPMENT FROM THE FACTORY WHEN NEW, COMPLETELY BEFORE PROCEEDING. SAVE ALL INSTRUCTIONS FOR FUTURE REFERENCE.



COMMON SERVICE PARTS

UNIVERSAL DRY WELL (EXTERIOR)

ITEM #	PART NUMBER	PART NAME	QTY
1	27808075	Hot Well Aluminum Kit	1
2	18026982	Front Shelf	1
3	18030040	Side Shelf Extension	1
4	19003592	Caster, 3-1/2" Dia., Swivel Plate	4


UNIVERSAL CONTROL MODULE

ITEM #	PART NUMBER	PART NAME	QTY
5	19013980	Relay, Solid State, Panel Mount, 24 A, 24-280 VAC	3
6	19008887	Electrical Cord w/ NEMA L14-20P	1
7	30-210005487	Face Plate, Control Panel	1
8	18016470	Controller, EVCO, f/ Dry Wells	3
9	385.152	Rocker Switch, Illuminated	1

UNIVERSAL DRY WELL (INTERIOR)

ITEM #	PART NUMBER	PART NAME	QTY
10	30-210014945	Insulation Cover	1
11	30-210028654	Insulation Cover	2
12	19019221	Heater, Rod - Chromalox	3
13	30-210031004	Heater Bracket	1
14	19017647	High Limit Switch, 350°F	3
15	30-210028848	Cover Bxrk, Snap Disc.	3
16	19013343	PT1000 Non-Rotating Bolt Sensor	3
17	30-210031003	Heater Bracket 3	2
18	30-210025004	Heater Bracket 2	4
19	30-210025007	Heater Bracket	5
20	30-210028655	Insulation Cover	1
21	30-210014947	Insulation Cover	1

ELECTRICAL DIAGRAM

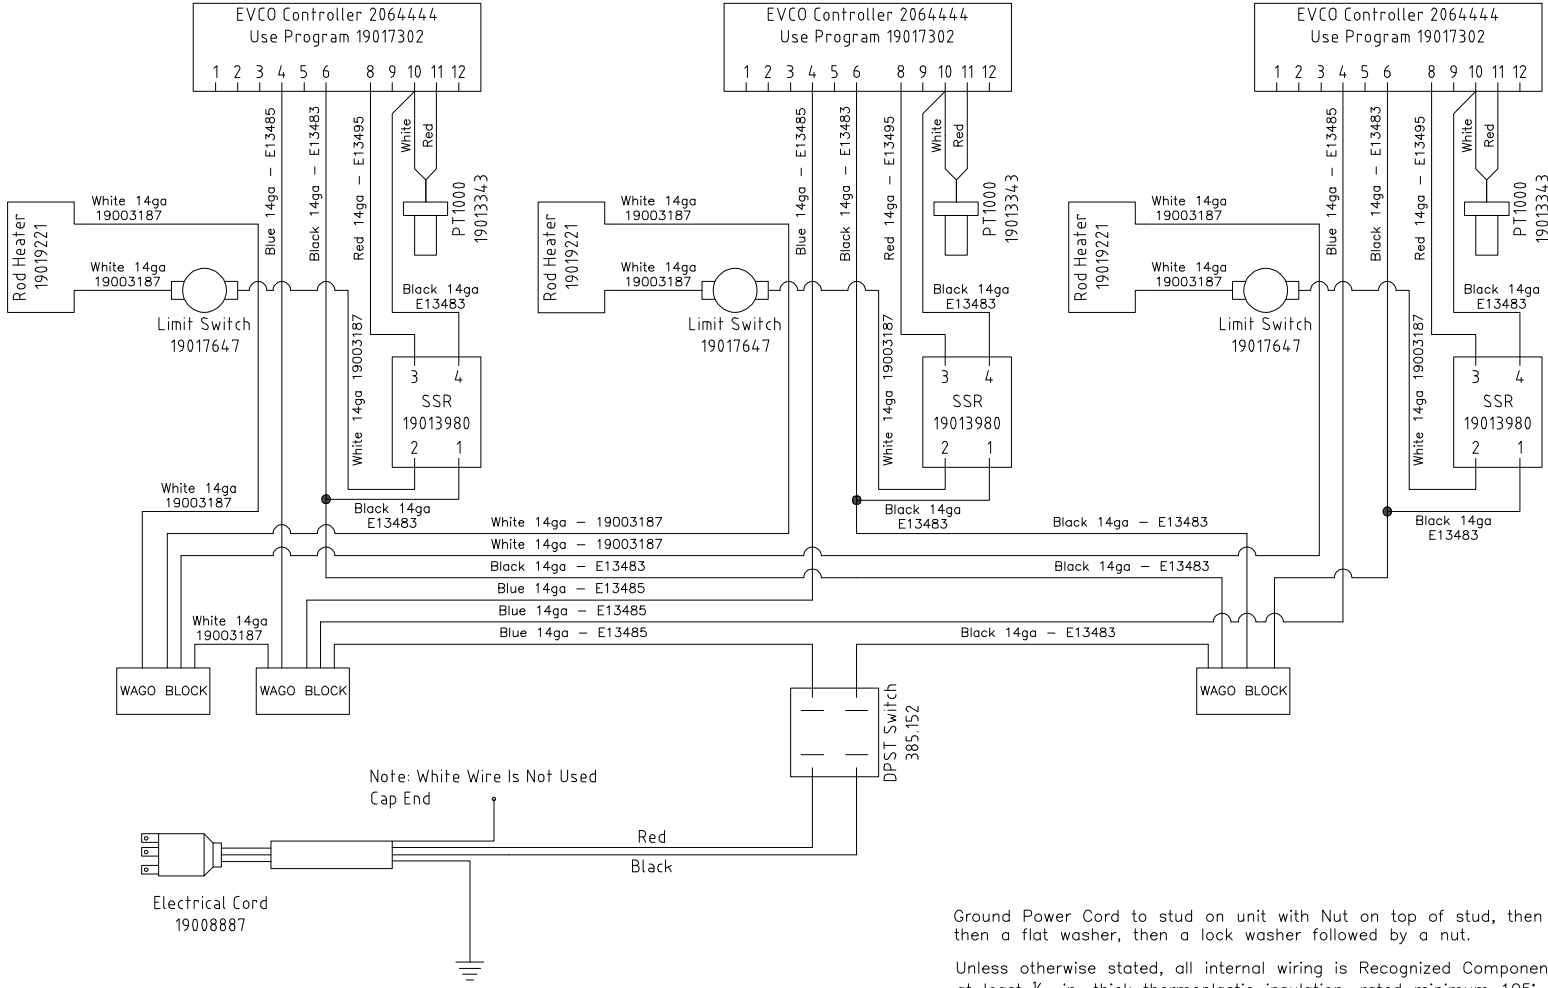

Ground Power Cord to stud on unit with Nut on top of stud, then terminal, then a flat washer, then a lock washer followed by a nut.

Unless otherwise stated, all internal wiring is Recognized Component (AVLV2) AWM, at least 1/32 in. thick thermoplastic insulation, rated minimum 105° C, 300V

TITLE	DRAWING #	REV.	VERS. DATE
Electrical Schematic, Taco Bell Dry Well	19019356	A	03/08/24

3 of 4

SPECIFICATIONS

Controller Settings

PARAMETER	SETTING
Temperature Range	N/A
Set Point	295.0° F
Temperature Offset - OF1	-8° F
Display Features	Adjustments
Can select °F or °C?	No
Can adjust temperature from display?	Yes
Can Initiate Defrost from display?	No

Electrical

PARAMETER	
Supply Power	208 V/60 Hz/1 Ph
Load Center Amperage	15.9 A

Heater

PARAMETER	
Voltage	208 V
Amperage	15.9 A
Wattage	1102 W (x3)
Resistance	36.1 Ω ($\pm 10\%$) (x3)

For Support, Please Call: 1.800.5.FRANKE, opt. 2 (1.800.537.2653, opt. 2)



**RECYCLE DOCUMENTS AND
EQUIPMENT RESPONSIBLY**

© 2024 Franke Foodservice Systems Americas, Inc. This media is the confidential and proprietary property of Franke Foodservice Systems Americas, Inc. and shall not be reproduced in any form of media without the express written permission of Franke. Trademarks used are the property of their respective owners. Due to continuous product development, Franke reserves the right to make changes in design and specifications without prior notice. Printed in the USA under license by Franke Technology and Trademark Ltd., Switzerland. Document Part # 19019722 REVA, 07-02-24