


USE 1/2" BLACK FLEX TO RUN WIRING BETWEEN THE COMPRESSOR COMPARTMENT AND THE FRONT DISPLAY.

ITEM NO.	QTY REQD.	PART_NO	R	DESCRIPTION	MATERIAL
1	1	P-1-16-3	-	DANFOSS 1/3 HP CU W/RECEIVER & DRAIN PAN	-
2	1	E-6-12-8	-	COIL, EVAPORATOR	-
3	1	P-1-12-11	-	EXP VALVE,#068U2130,DANFOSS R404A 1/4TON	-
4	1	P-1-21	-	SIGHT GLASS, 1/4" SOLDER	-
5	1	P-1-23	-	DRYER, SPORLAN C-05-S HH	-
6	1	E-10-12-71	-	POWERCORD, MOLDED RT ANGLE PLUG 5-15	-
7	1	E-5-21	-	HEAT CABLE, DOUBLE, 115 VOLTS, 84" LONG	-
8	1	E-5-12-2	-	HEAT CABLE, DOUBLE, 115 VOLTS, 108" LONG	-
9	3	E-5-26-2	-	HEATER,S/S TUBULR 120V 160W	-
10	2	E-6-003	-	FAN,115V CCW W/556 FAN BLADE ACME MIAMI	-
11	1	E-4-3-160	-	CONTROLLER, ETC1H3 115V FREEZER DANFOSS	-

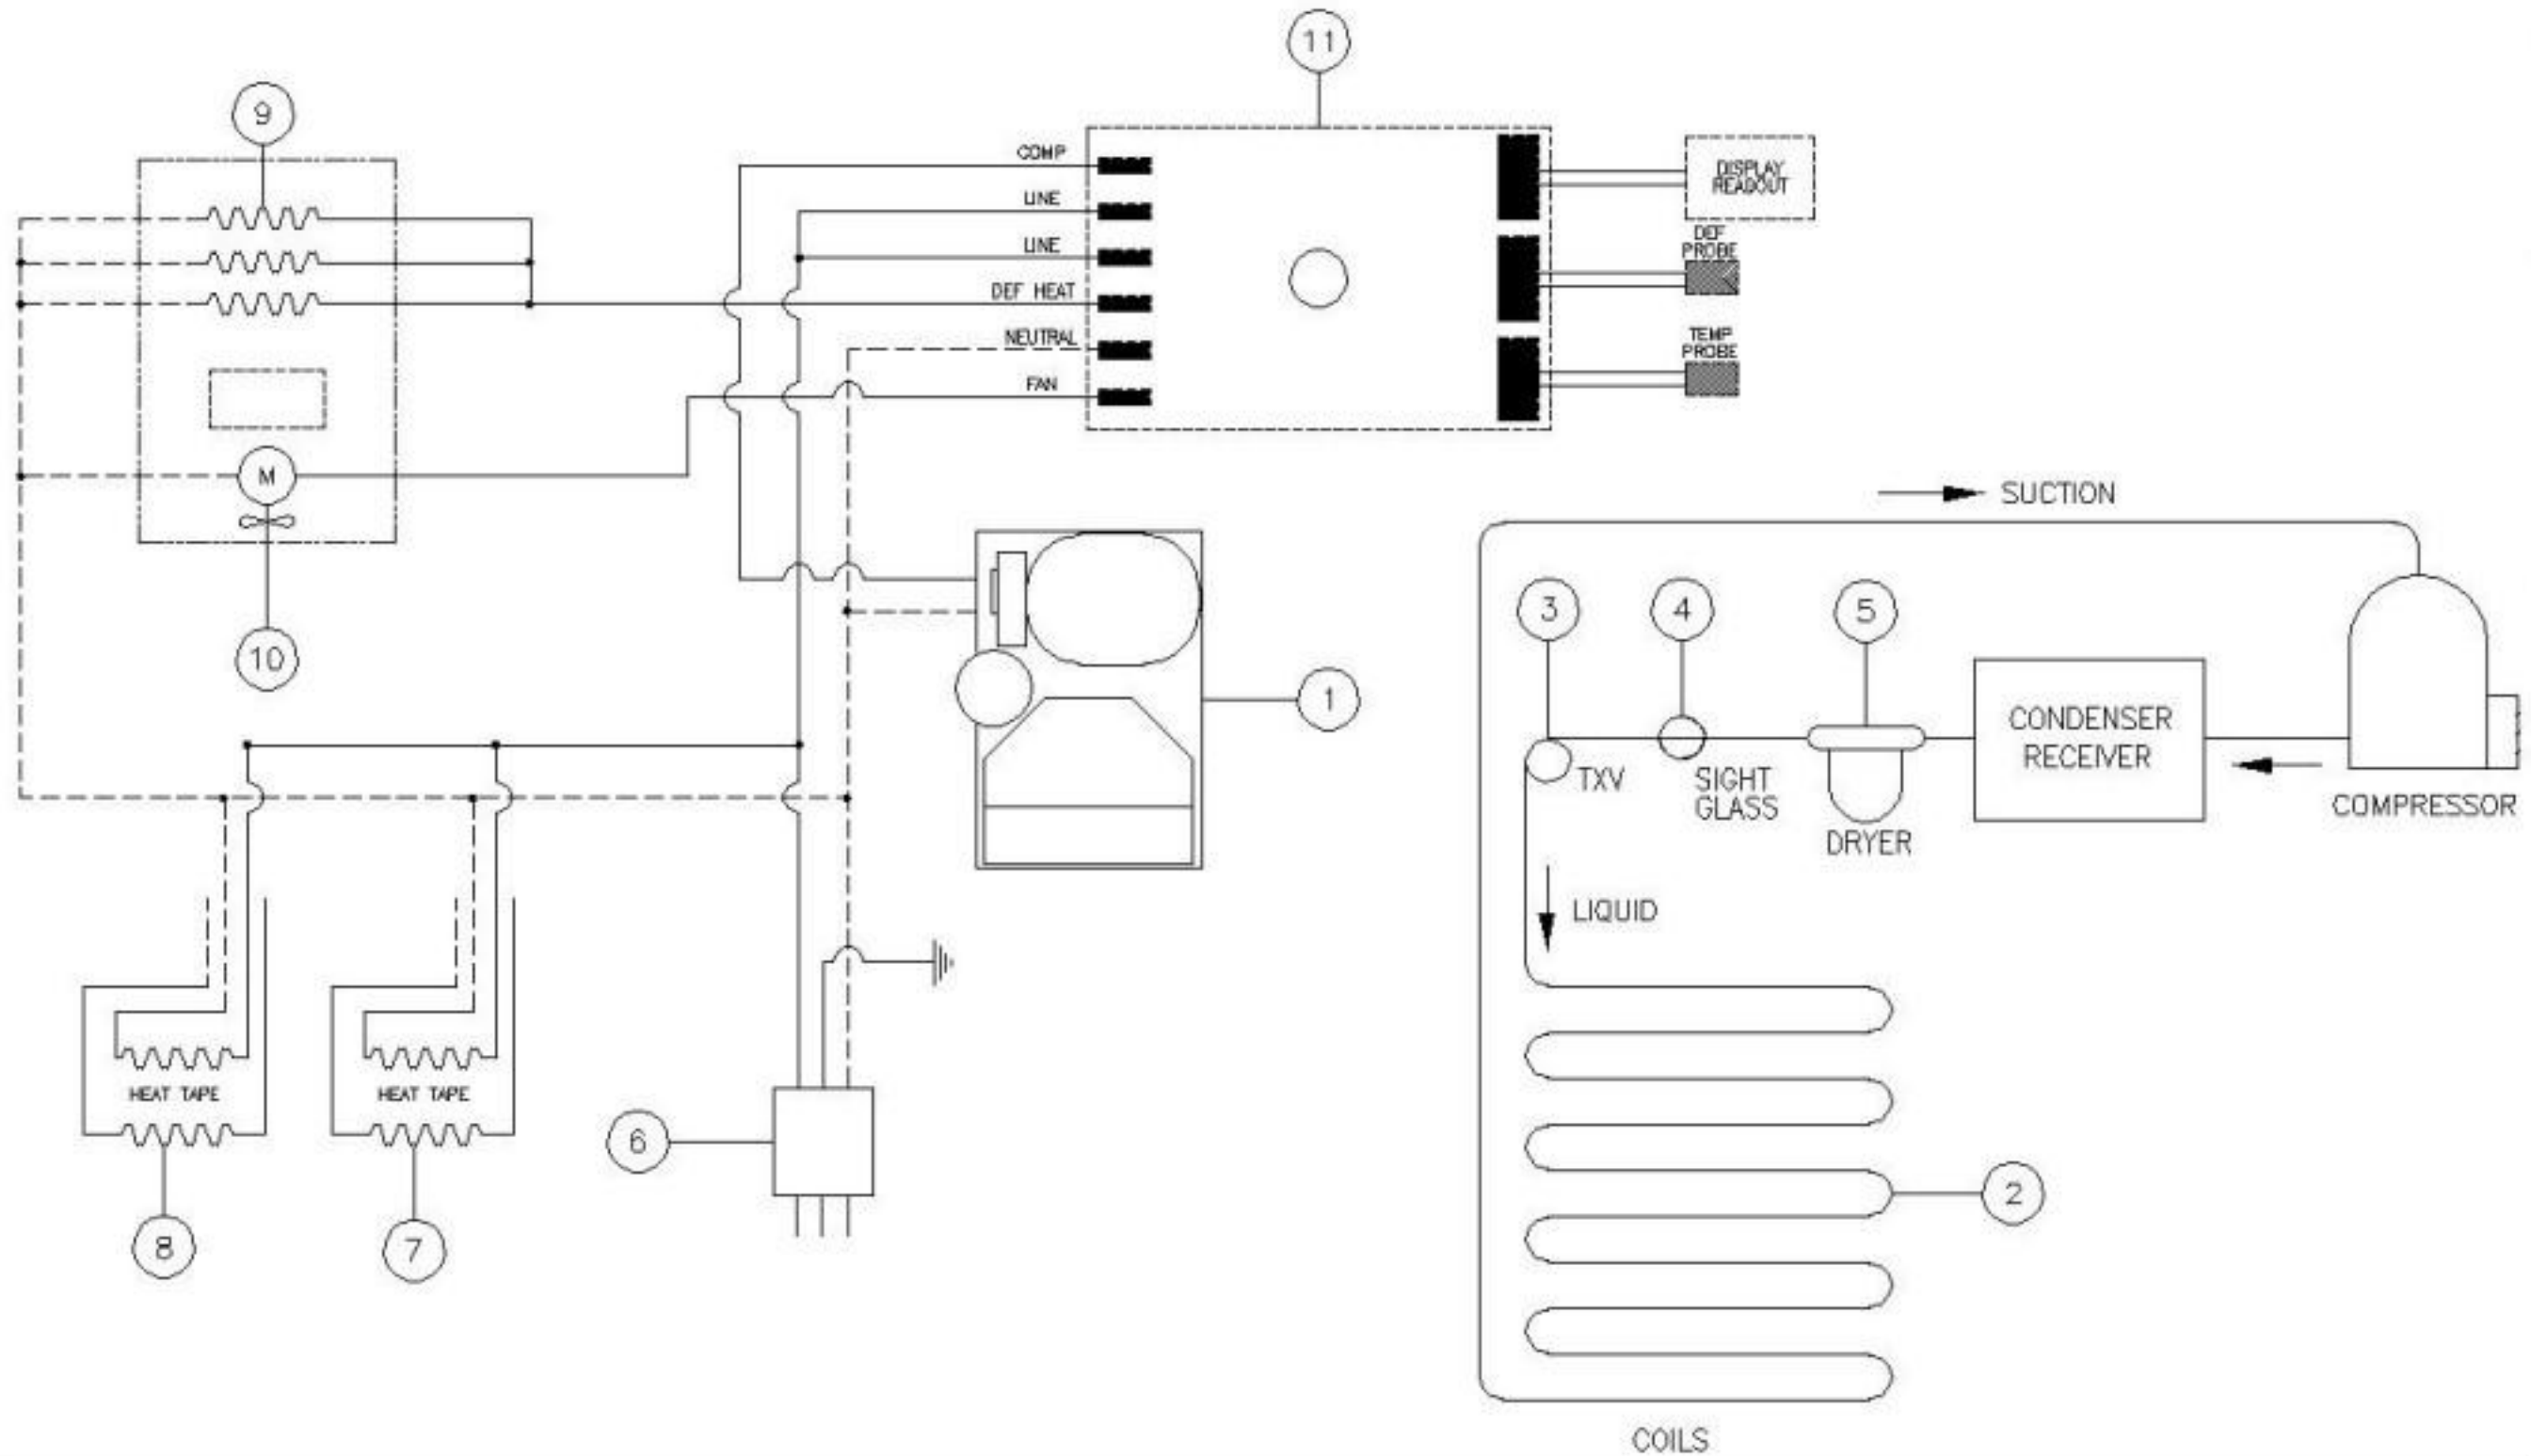

DRAWING PLOT DATE:

LODCN ID: Jimmy Seal

DRAWING LOG NAME: C:\Documents and Settings\jseal\Desktop\Working Drawings\MECHANICAL\REFRIGERATION\SCH.dwg

TITLE:	DATE:	MATERIAL:	ITEM USED ON		ASSEMBLY	
			QTY	REVISION	QTY	DATE
WIRING SCHEMATIC	21SEP05					
	DATE:	WIDTH:	0.00000000	SYN		
	DRAWN: J. SEALS	GRAIN LENGTH:	0.00000000			
	CHECKED:	NO. OF PIECES:	1.00000000			
ITEM:	SCALE: NONE	COMMENTS:				
	DWG: SCH					
	GSF30					