


Schematic

ELECTRICAL RATING	
Voltage	120 V
Frequency	60 Hz
Phases	1 Ph
Current	1.25 A

BILL OF MATERIALS			
ITEM NUMBER	QUANTITY REQUIRED	PART NUMBER	DESCRIPTION
1	1	E-10-12-8	<CORD 14/3 SJT/D 96" (20/BDL)
2	1	P-1-18-13	<N/DW 971, CONTROLLER, NO SENS
3	1	P-1-18-14	1.5M NTC SENSOR W/ RAST CONNECTOR
4	1	E-5-117	<SWITCH, HI-LIMIT (PB) #3L1122D
5	1	E-5-0145	FOIL HTR,8-1/2X11-1/4" 120V150W(BD)
6	1	E-4-3-46	CONNECT,REUSABLE 3WIRE(2500/B)222-413
7	1	E-1-19-1	SWITCH,ROCKER LTA-201-TRB/125N LIGHTED
8	1	E-3-23-2CS	FUSEHOLDER,LITTLEFUSE 345-612
9	1 Ft	E-10-15-1	WIRE,14-WH-THIN STRND 600V
10	2.50 Ft	E-10-15	WIRE,14-BK-THIN STRND 600V
11	1	E-3-21-7	+FUSE, LITTLEFUSE R326002P 2AMP
12	1	E-9-9-4	RING TERM. (FS) #RB10N, BLUE, 16-14
13	2	E-9-1-1	DISCON,SOB187-FI/E .187 FULLY INSUL(100)
14	6	E-9-1	E12068 DISCON(FS)(100)SOB250-FI FEM,BLU
15	1	E-9-7-3	<(R)E12039 CON.FUL,INSU.#50A250X-FI (FS)

NOTE/NOTA:
 CONTROL TO DISPLAY IN FAHRENHEIT
 DISPLAY DEBE MARCAR EN GRADOS FAHRENHEIT

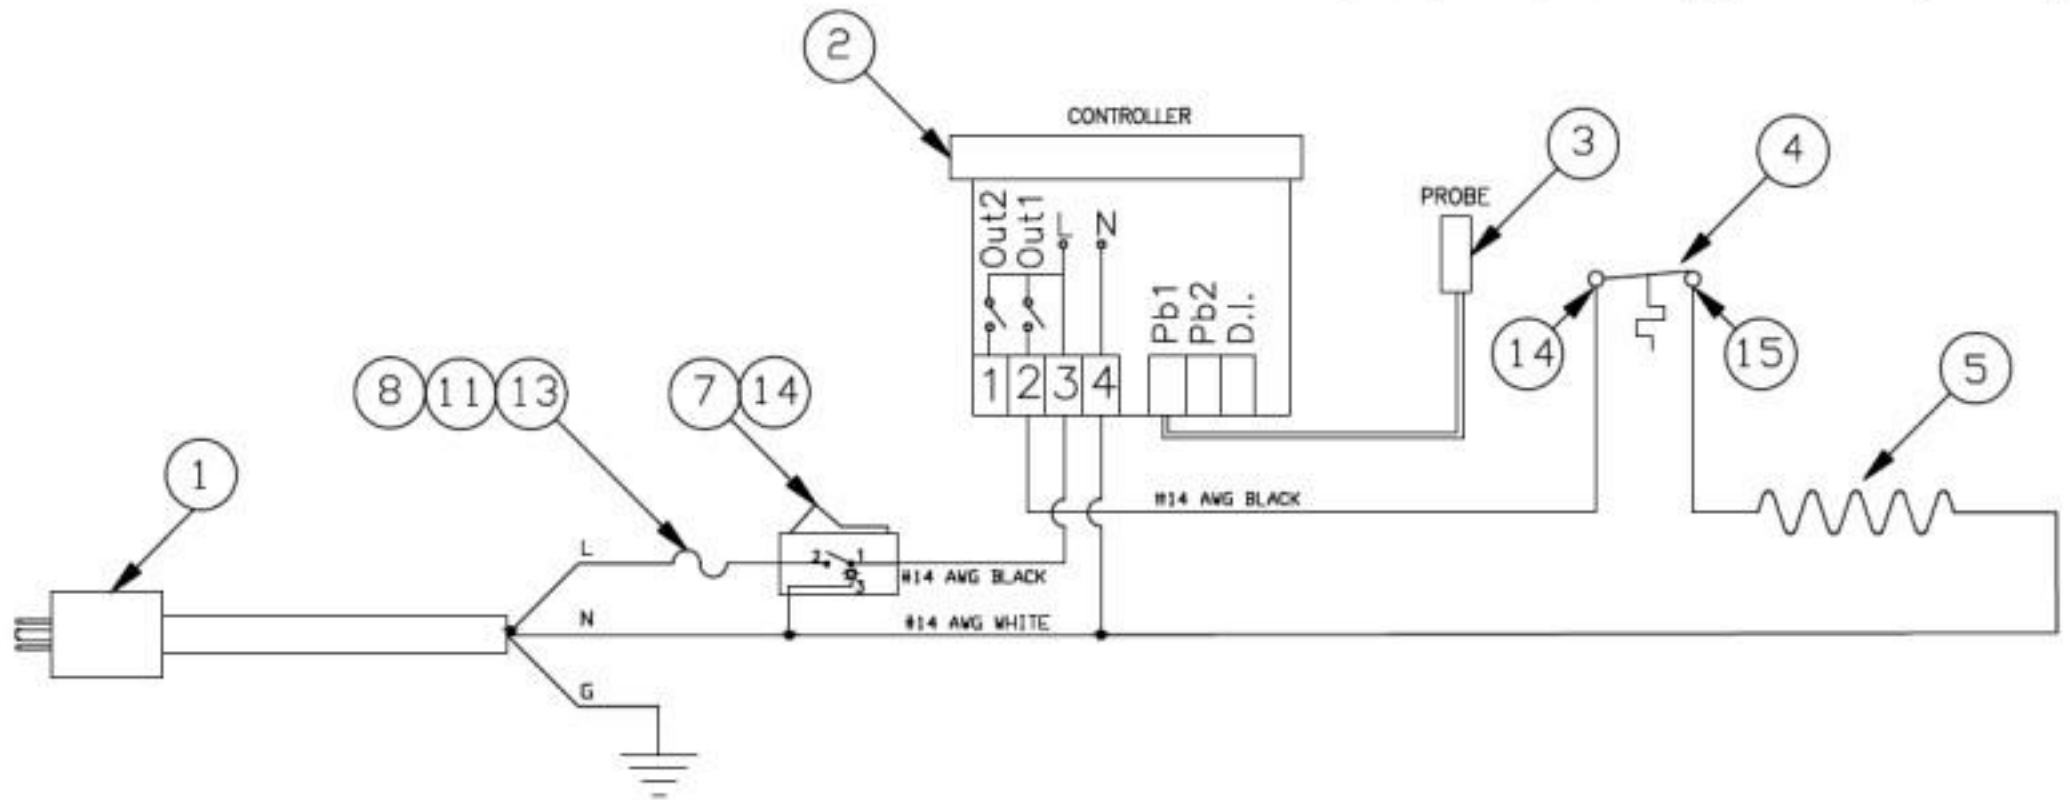

REVISION HISTORY				DATE:	MATERIAL:	SYM	REVISION	DATE	CUSTOMER:
REV	CHANGE DESCRIPTION	REV DATE	ENG	13NOV18		B	20184823 LG	03/01/19	McDONALD'S
B	HI LIMIT SYMBOL REPLACED	03JAN19	LG						
A	SWITCH WAS CHANGED	19DEC18	JGM						

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF H&M AND SHALL NOT BE REPRODUCED OR COPIED OR TRANSMITTED TO A THIRD PARTY WITHOUT THE WRITTEN PERMISSION OF H&M.	SIZE: B	SHEET: 1 OF 1	TITLE: ELECTRICAL SCHEMATIC, MARINATOR WITH DIGITAL CONTROL	ITER NO: MCR011.SCH
--	----------------	---------------	---	---------------------