

## SERIES D


HEAT SEAL INNOVATION — THE INDUSTRIES ONLY NSF CERTIFIED & ENERGY SMART OVERWRAPPER

### FEATURES

- Innovative Seal Plate Design with 10 Independent Heat Zones that Allow for Continued Use of Seal Plate in the Event of Damage Without Immediate Replacement
- Polyamide Film Wrap Seals & Protects Seal Plate from Moisture
- Photo Eye Detects All Tray Colors Consistently & Initiates Heating Cycle
- Dual LED Light Indicator Indicates Heating Status
- Energy Smart Microprocessor Reduces Power Consumption by 80%
- Local Utility Rebates may be Available



### MODEL SPECS

<b>MODEL</b>		700ES Mini
<b>FILM MOUNT</b>		Cradle System
<b>FILM CAPACITY</b>		13" Maximum Roll Width, 9" Maximum Roll Diameter
<b>SEAL PLATE</b>		6" x 15"
<b>OVERALL DIMENSIONS</b>		23.5" D, 15.5" W, 5" H (60 D, 40 W, 13 H cm)
<b>ELECTRICAL SPECIFICATIONS</b>		115 Volt, 60Hz, 132 Watts
<b>WEIGHT</b>		23 lbs. (13kg)
<b>OTHER FEATURES</b>		No Assembly Required, Quick Film Changeover
<b>COMPARABLE TO</b>		625A Mini



**SERIES D**

**OTHER FEATURES**


- Square Edged Hot Rod Cuts Film with Ease
- Circuit Breakers Allow for Fast, Easy Reset and Low Maintenance
- Rigid Aluminum and Stainless Steel Construction
- Supplied with a Replaceable Non-Stick Cover to Maintain a Hygienic Sealing Surface

**SERIES D REPLACEMENT PARTS**

**6" x 15" Circuit Board**  
(1818-037)

**Series D Seal Plate 6" x 15"**  
(6137-245)

**Square Film Cut Off Rod**  
(1824-031)

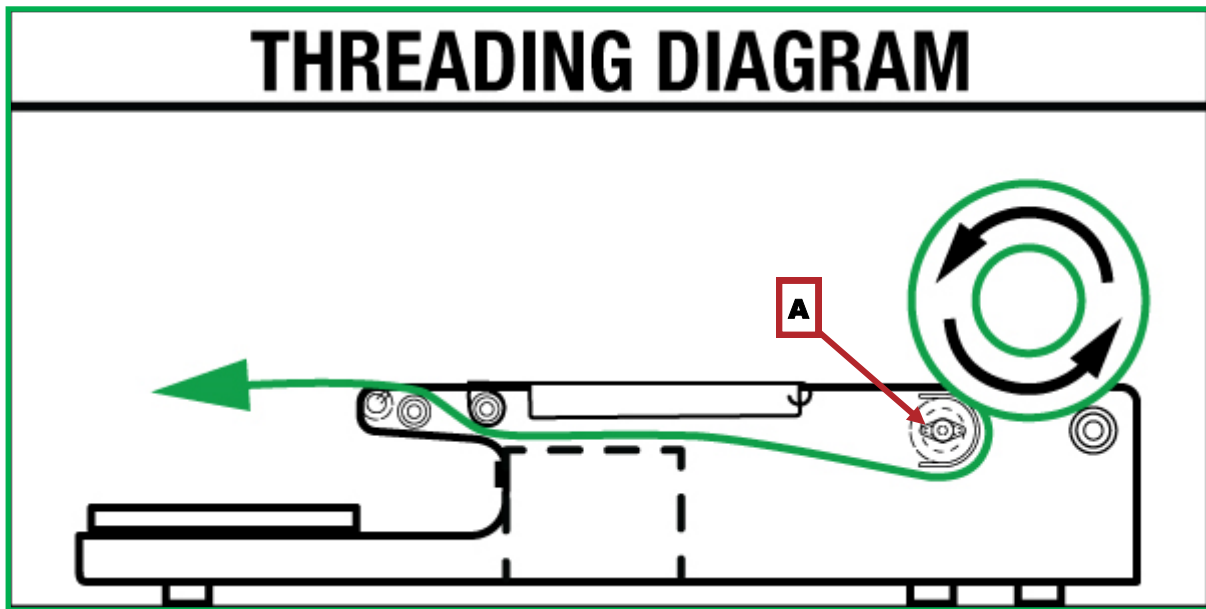

**FILM THREADING**

1. Facing the tension knob (A) side of the machine, the film should come off the roll counter-clockwise and **pass in-between the two rollers it sits on.**
2. Pull the film under the wrapping bridge and cut it with the hot rod.
3. The black tension knob (A) can be adjusted for proper tension on the film.

