


April 2017

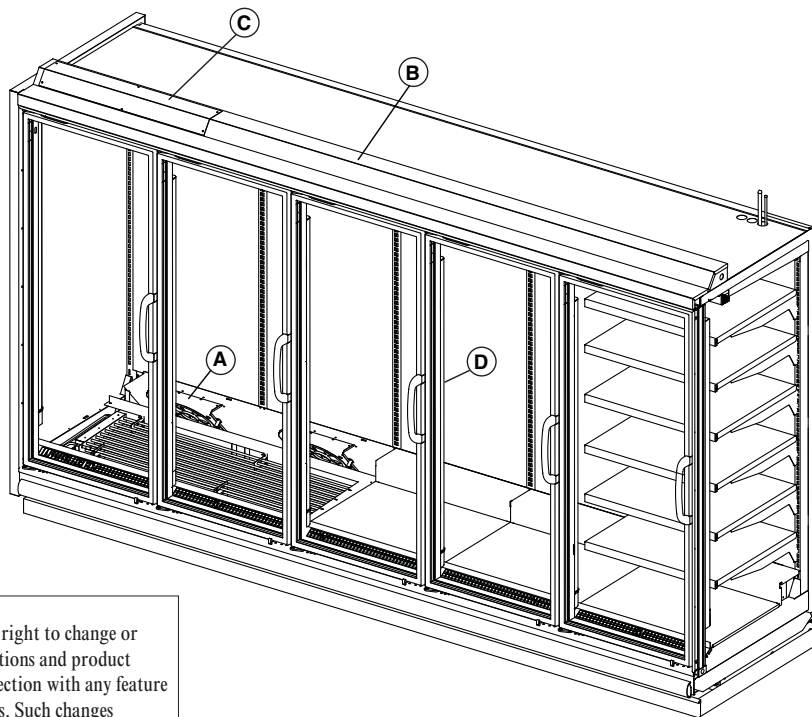

**DOE 2017**  
Energy Efficiency  
Compliant

Refrigeration and electrical connections are on top. Overhead piping and electrical circuits are required.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

**Warning:**  
Terminal block NOT for case-to-case wire connection!

Item	Part #	Description	Wiring Item #	Item	Part #	Description	Wiring Item #
<b>FAN ASSEMBLIES, AND THERMOSTATS</b>				<b>LED FIXTURES AND POWER SUPPLY</b>			
(A)	Fan Assembly		(1)	(C)	0499399	Power Supply	
	0530147	Standard Motor (Energy Efficient)		(D)		LED Fixture	
	0557935	Fan Blade				<i>Replace with like fixtures</i>	
(B)		Optional Adjustable Refrigeration Thermostat	(2)				

*Refer to INNOVATOR REACH-IN GLASS DOOR INSTALLATION AND SERVICE manual, PIN 0425683, for Innovator frame replacement parts.*

Data sheet-Reach-in RMTM

Note: Revision G: April 2017. Updated LED energy values. Other changes marked with a bar, circle or underline.

# Engineering Plan Views


Refrigeration and electrical connections are on top.  
Overhead piping and electrical circuits are required.

PHYSICAL DATA	
Merchandiser Drip Pipe (in.)	1
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	5/8

Tall Reach-In  
2, 3, 4 & 5 Door

Dimensions shown as inches & (mm).

## RLTM/RMTM - Plan View 2, 3, 4 & 5 Door

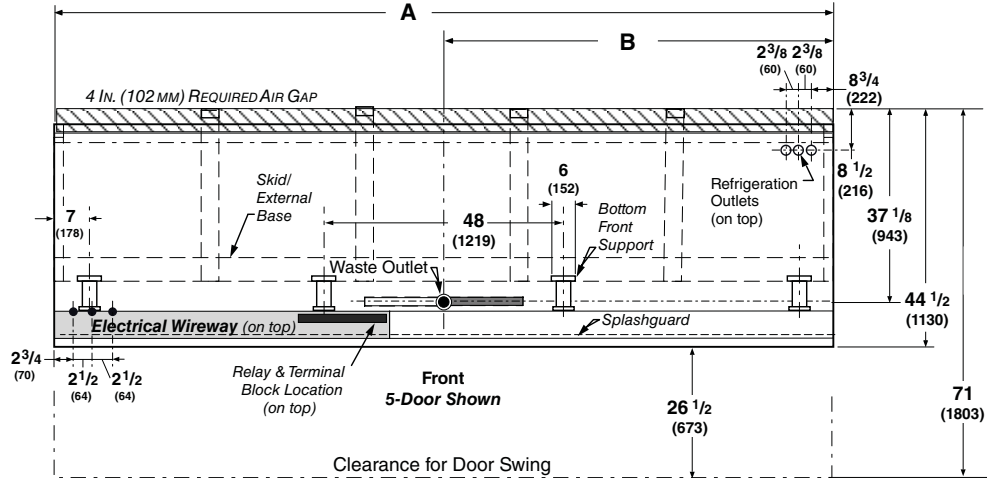

General	2 Dr	3 Dr	4 Dr	5 Dr
<b>(A)</b> Case Length (without ends or partitions) <i>**NOTE: Each solid end adds approximately 2 3/8 in (60 mm) to length of line up; each partition add approximately 2 3/4 in (70 mm); case to case joints can add approximately 1/8 in (3 mm) for gasket material.</i>	62 (1575)	92 1/2 (2350)	122 7/8 (3121)	153 3/8 (3896)
Maximum outside dimension of case back to front <i>(Includes bumper)</i>	44 1/2 (1130)	44 1/2 (1130)	44 1/2 (1130)	44 1/2 (1130)
Back of case to front of splashguard	41 3/4 (1060)	41 3/4 (1060)	41 3/4 (1060)	41 3/4 (1060)
Width of Skid rail	3 3/8 (86)	3 3/8 (86)	3 3/8 (86)	3 3/8 (86)
Width of Bottom Front Support	6 (152)	6 (152)	6 (152)	6 (152)
Stub-up area between front Skid rail and splashguard	7 5/8 (194)	7 5/8 (194)	7 5/8 (194)	7 5/8 (194)
<b>Electrical Service</b>				
Left hand end of case to the center of nearest knockout	2 3/4 (70)	2 3/4 (70)	2 3/4 (70)	2 3/4 (70)
Right hand end of case to the center of center knockout	56 3/4 (1441)	87 1/4 (2216)	117 5/8 (2988)	148 1/8 (3762)
Back outside of case to center of knockout	32 (813)	32 (813)	32 (813)	32 (813)
Raceway Length <i>**NOTE: Electrical Field Wiring Connection Point is at terminal.</i>	62 (1575)	62 (1575)	62 (1575)	62 (1575)
<b>Waste Outlet</b>				
<b>(B)</b> Right end of case to center of waste outlet	23 7/8 (606)	54 1/4 (1378)	46 1/4 (1175)	76 5/8 (1946)
Back outside of case to center of waste outlet	37 1/8 (943)	37 1/8 (943)	37 1/8 (943)	37 1/8 (943)
<b>Water Seal</b>				
Edge of water seal to center of waste outlet	13 (330)	13 (330)	13 (330)	13 (330)
Schedule 40 drip piping <i>** NOTE: Field installed water seal outlets, tees, and connectors are shipped with case.</i>	1 (25)	1 (25)	1 (25)	1 (25)
<b>Refrigeration Outlet</b>				
RH end of case to center of RH refrigeration outlet <i>(TOP OF MERCHANDISER)</i>	8 3/4 (222)	8 3/4 (222)	8 3/4 (222)	8 3/4 (222)
Back outside of case to center of refrigeration outlet	8 1/2 (216)	8 1/2 (216)	8 1/2 (216)	8 1/2 (216)
Outside bottom front supports from end of case	7 1/2 (191)	7 1/2 (191)	7 1/2 (191)	7 1/2 (191)
Center bottom front support from Centerline <i>Distance between Center and Outside supports will vary. Top piping is standard in the RMTM case.</i>	24 (610)	24 (610)	24 (610)	24 (610)

# Tall Reach-in 2, 3, 4 and 5 Door Models




All RL and RM models meet or surpass the requirements of the DOE 2017 energy efficiency standards.

RMTM

With Innovator Doors  
Dairy, Deli, Beverages

**Standard Reach-in configuration consists of Innovator I doors, energy efficient fan motors, and EcoShine II LED vertical lighting.**

Refrigeration and electrical connections are on top. Overhead piping and electrical circuits are required.

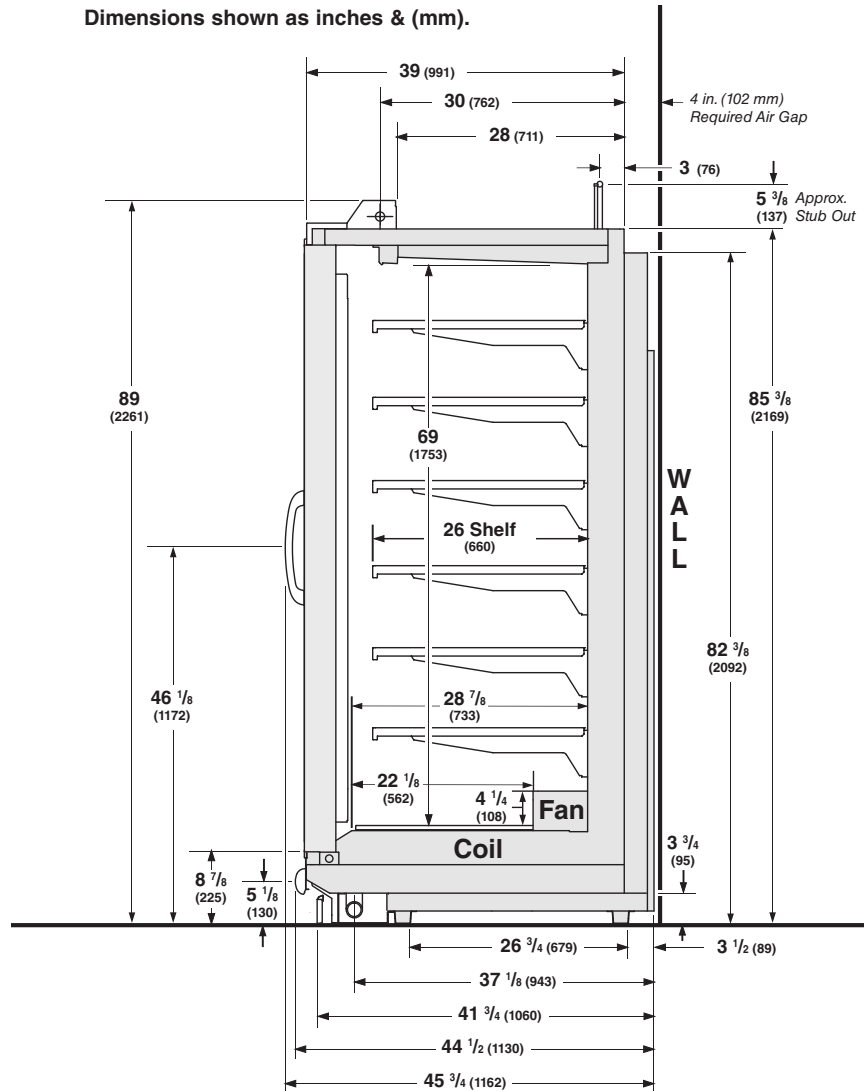

**Estimated Charge \*\***

<b>2 Dr</b>	2.3 lb	37 oz	1.0 kg
<b>3 Dr</b>	3.2 lb	51 oz	1.4 kg
<b>4 Dr</b>	4.1 lb	66 oz	1.8 kg
<b>5 Dr</b>	5.1 lb	82 oz	2.3 kg

\*\*This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately half a pound (8 oz / 0.2 kg).

**NSF Certification**

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials & cleanability.

**REFRIGERATION DATA§**

**Note:** This data is based on store temperature and humidity that does not exceed 75°F and 55% R.H.

**MEDIUM TEMP**

<b>Discharge Air (°F)</b>	34
<b>Evaporator (°F)</b>	32
<b>Unit Sizing (°F)</b>	30

§ Average evaporator temperature shown. Use dew point for high glide refrigerants for unit sizing. Care should be taken to use the dew point in PT tables for measuring and adjusting superheat. Adjust evaporator pressure as needed to maintain discharge air temperature shown.

<i>Btu/hr/Door</i>	NSF	
	TYPE I	TYPE II
<b>INNOVATOR</b>		
<b>Parallel</b>	440	490
<b>Conventional</b>	450	500

**DEFROST DATA**

<b>Frequency (hr)</b>	24
<b>Defrost Water (lb/door/day)</b>	.36
<i>(± 15% based on case configuration and product loading.)</i>	

**ELECTRIC**

<b>Temp Term (°F)</b>	NA
<b>Failsafe (minutes)</b>	NA

**GAS** Not recommended

**OFFTIME** 30 minutes

**CONVENTIONAL CONTROLS**

**Low Pressure Backup Control**  
**C/CO (Temp °F)\*** +20°/ +10°

**Indoor Unit Only, Pressure Defrost Termination (Temp °F)\***

Not Recommended  
\*Use a Temperature Pressure Chart to determine PSIG conversions.

# RMTM

With Innovator Doors  
Dairy, Deli, Beverages

## Electrical Data

	2Dr	3Dr	4Dr	5Dr				
<b>Number of Fans</b>	2	3	4	5				
		<b>Amperes</b>				<b>Watts</b>		
	<b>2Dr</b>	<b>3Dr</b>	<b>4Dr</b>	<b>5Dr</b>	<b>2Dr</b>	<b>3Dr</b>	<b>4Dr</b>	<b>5Dr</b>
<b>Energy Efficient Evaporator Fan</b>								
120V 50/60Hz Innovator	0.2	0.3	0.4	0.5	14.4	21.6	28.8	36.0
220V 50/60Hz Export Innovator	0.3	0.45	0.9	1.2	50	75	100	125
<b>Door Anti-sweat Heaters (on fan circuit)</b>	N/A							
<b>Frame Anti-sweat Heaters (on fan circuit)</b>								
120V 50/60Hz Innovator	0.15	0.22	0.29	0.37	17.6	26.4	35.2	44.1
220V 50/60Hz Export Innovator	0.08	0.12	0.16	0.20	17.6	26.4	35.2	44.1
<b>Minimum Circuit Ampacity</b>								
120V 50/60Hz Innovator	0.55	0.72	0.89	1.67				
220V 50/60Hz Exp Innovator Electric Defrost	0.7	0.95	1.2	1.45				
<b>Maximum Over Current Protection 120V</b>	20	20	20	20				
<b>Maximum Over Current Protection 220V</b>	20	20	20	20				

ONLY LIGHTING CONFIGURATIONS THAT ARE COMPLIANT WITH THE U.S. DEPT. OF ENERGY (DOE) 2017 REGULATION ARE AVAILABLE FOR SALE FOR USE IN THE U.S.A.

	2Dr	3Dr	4Dr	5Dr	2Dr	3Dr	4Dr	5Dr
<b>Standard Vertical LED Lighting</b>								
Husmann EcoShine II™ - A (120V)	0.35	0.53	0.71	0.89	42.5	63.8	85.1	106.4
Husmann EcoShine II™ - A (220V Export)	0.19	0.29	0.39	0.48	42.5	63.8	85.1	106.4
<b>Optional Vertical LED Lighting</b>								
Husmann EcoShine II™ - B (120V)	0.36	0.52	0.68	0.84	43.2	62.3	81.4	100.5
Husmann EcoShine II™ - B (220V Export)	0.20	0.28	0.37	0.46	43.2	62.3	81.4	100.5

**Product Data**

<i>Recommended Usable Cube</i> <sup>1</sup> (Cu Ft/Dr)	34.44 ft <sup>3</sup> /Dr (3.20 m <sup>3</sup> /Dr)
<i>AHRI Total Display Area</i> <sup>2</sup> (Sq Ft/Dr)	14.26 ft <sup>2</sup> /Dr (1.32 m <sup>2</sup> /Dr)
<i>Shelf Area</i> <sup>3</sup> (Sq Ft/Dr)	32.27 ft <sup>2</sup> /Dr (9.84 m <sup>2</sup> /Dr)

<sup>1</sup> AHRI Refrigerated Volume less shelving and other unusable space: Refrigerated Volume/Unit of Length, ft<sup>3</sup>/ft [m<sup>3</sup>/m]

<sup>2</sup> Computed using AHRI 1200 standard methodology: Total Display Area, ft<sup>2</sup> [m<sup>2</sup>]/Unit of Length, ft [m]

<sup>3</sup> Shelf surface area is composed of bottom deck plus standard shelf complement, as shown in the Hussmann *Product Reference Guide*. The standard shelf complement for this model is (6) rows of 22-inch shelves.

ESTIMATED SHIPPING WEIGHT <sup>4</sup>						
Case	1 Dr	2 Dr	3 Dr	4 Dr	5 Dr	Solid End
						(each)
<b>lb (kg)</b>	NA (NA)	926 (420)	1290 (585)	1637 (743)	2006 (910)	60 (27)

<sup>4</sup> Actual weights will vary according to optional kits included.

# RMTM


With Innovator Doors  
Dairy, Deli, Beverages

# Fan and Heater Circuits

Electric Defrost (Standard)  
Low Temperature

## Fan and Heater Circuits - Offtime Defrost (standard) Medium Temperature

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS  
R = Red P = Purple 2P = Purple (2 Bands) DB = Dark Blue BK = Black  
LB = Light Blue Pink = Pink BR = Brown Y = Yellow OR = Orange W = White  
**THESE ARE MARKER COLORS (WIRE MAY VARY.)**

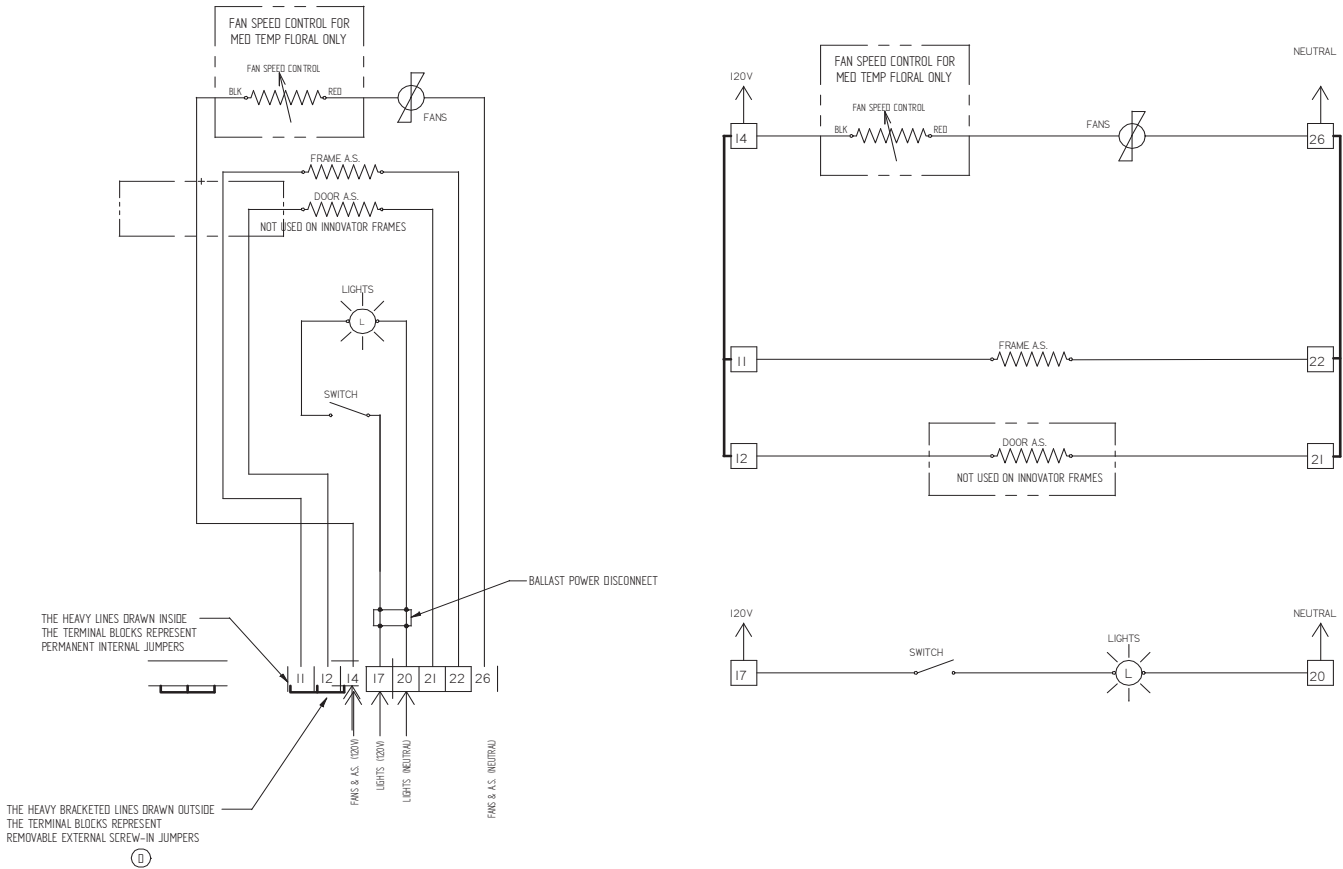

Medium Temperature  
with  
Offtime Defrost

### Terminal Blocks in Raceway

