


RISER INSTALLATION INSTRUCTIONS

FOR CAFÉ ESPRESSO 2.0

NEWCO ENTERPRISES INC,
 3650 NEW TOWN BLVD SAINT CHARLES, MO 63301
 1-800-325-7867

WARNING: Read through all instructions carefully before servicing your machine. All servicing should be performed by an authorized service technician.

These instructions are for the installation of the Café Espresso 2.0 Riser Assembly PN 153396. The riser assembly should be installed under the brewer when using fridge PN 153392.

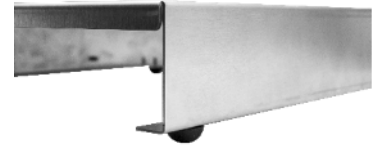


1. Turn the brewer off, then unplug power cord from wall outlet. Disengage power cord from the back of the machine, and disconnect water line (if applicable). Set connections aside, where they will not interfere with installation.
2. Disconnect milk hose if applicable. Remove side tank and set aside. Remove drip tray and waste bin and set aside. Tape the bean hopper shut if desired.
3. Keeping the brewer level, lift the Café Espresso 2.0 and set aside.

CAUTION: Café Espresso 2.0 brewer weighs approximately 35 lbs.

4. Place riser assembly on a clean, level surface where the brewer is to be placed. Be sure to leave room in front of the riser for the drip tray and waste bin.



5. Ensure riser is clear, then lift Café Espresso 2.0 brewer. Set onto the riser assembly, aligning the back feet first. Brewer feet will fall into circled slots, remaining slots are for machine ventilation.

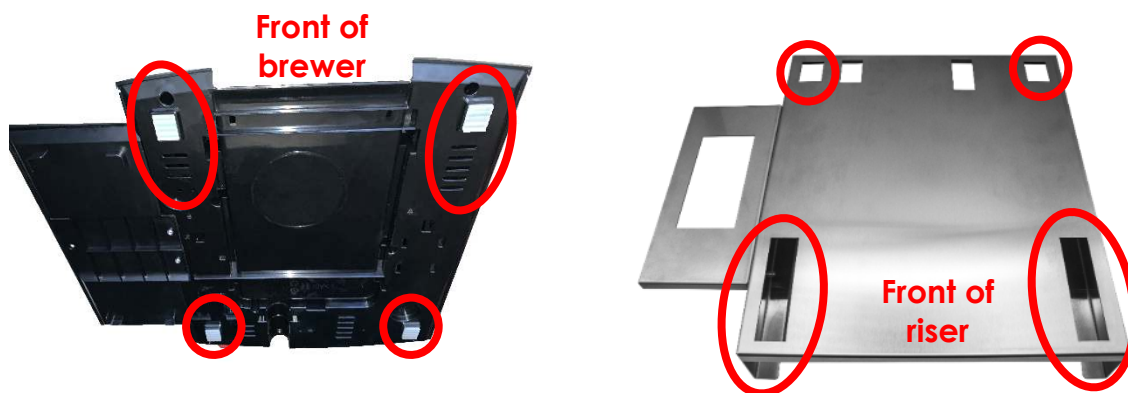

6. Replace side tank, waste bin, and drip tray. Ensure side tank contains at least 16 ounces of water. Reconnect water line, and milk hose if applicable. Plug power cord in the brewer, then into the wall outlet. Turn brewer on.