



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Model No.

B-2992-L

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com



ADA Compliant

This Space for Architect/Engineer Approval


Job Name _____ Date _____

Model Specified _____ Quantity _____

Customer/Wholesaler _____

Contractor _____



Architect/Engineer _____

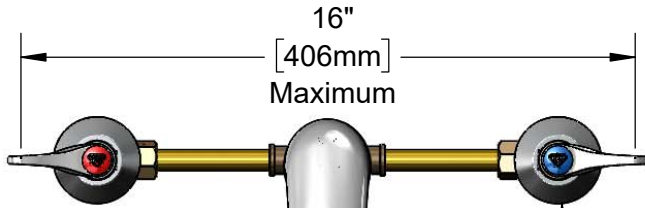

16"
[406mm]
Maximum

Quarter-Turn
Cerama Cartridges w/
Check Valves &
Lever Handles w/
Color Coded Indexes

Cast Spout w/
B-0199-03-N05
0.5 GPM Spray Device

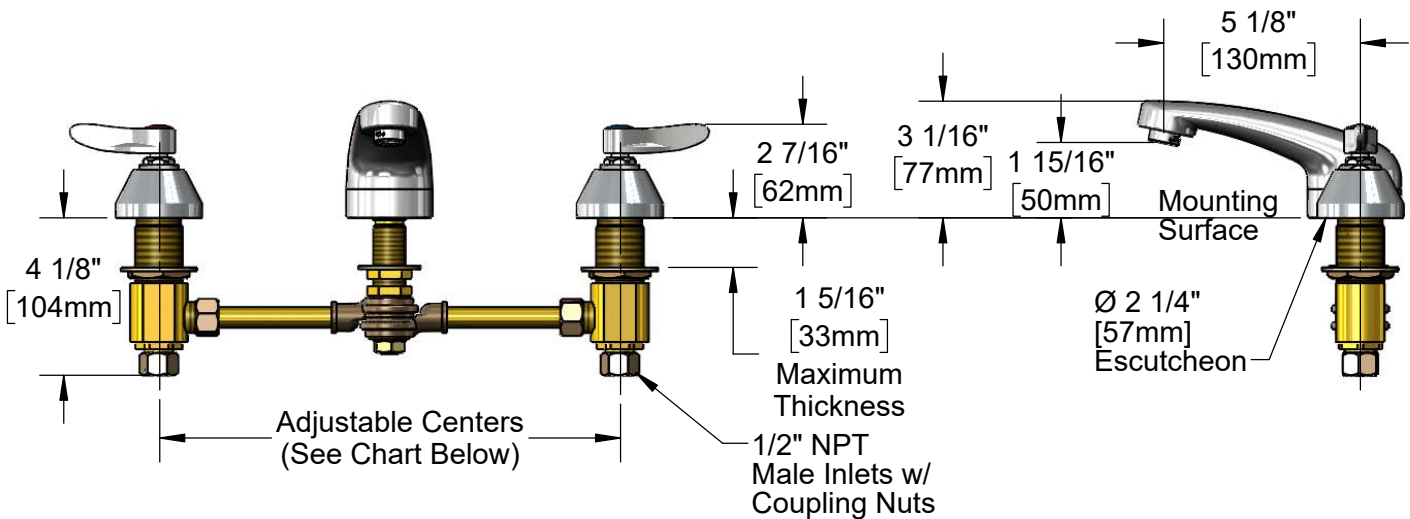

4 1/8"
[104mm]

Adjustable Centers
(See Chart Below)

1 5/16"
[33mm]
Maximum
Thickness


1/2" NPT
Male Inlets w/
Coupling Nuts

5 1/8"
[130mm]

Mounting
Surface

Ø 2 1/4"
[57mm]
Escutcheon

Hot & Cold Center Sections
Can be at Angle

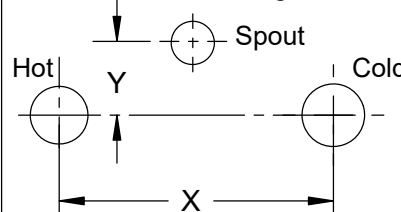

if "Y" is

Then Faucet Will
Fit "X" with Standard
1/4" NPT Cross Pipes
Furnished

1/2"

12"

1"

11 3/4"

1 1/2"

11 3/8"

2"

11"

Product Specifications:

12" Concealed Widespread Mixing Faucet, Quarter-Turn Cerama Cartridges w/ Check Valves, Lever Handles, Cast Spout w/ 0.5 GPM Non-Aerated Spray Device & 1/2" NPT Male Inlets w/ Coupling Nuts

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690


Model No.

B-2992-L

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

ITEM NO.	SALES NO.	DESCRIPTION
1	001193-19NS	Red Button Index, Press-in
2	000925-45	Lab Handle Screw
3	001638-45NS	Lever Handle (New Style)
4	001257-40NS	Bell Escutcheon
5	011616-25NS	CWS Quarter-Turn Cerama Cartridge w/ Check Valve, RTC
6	000958-20	Coupling Nut
7	B-0199-03-N05	0.5 GPM Spray Device, 13/16-27 Male
8	011617-25NS	CWS Quarter-Turn Cerama Cartridge w/ Check Valve, LTC
9	018506-19NS	Blue Button Index, Press-in

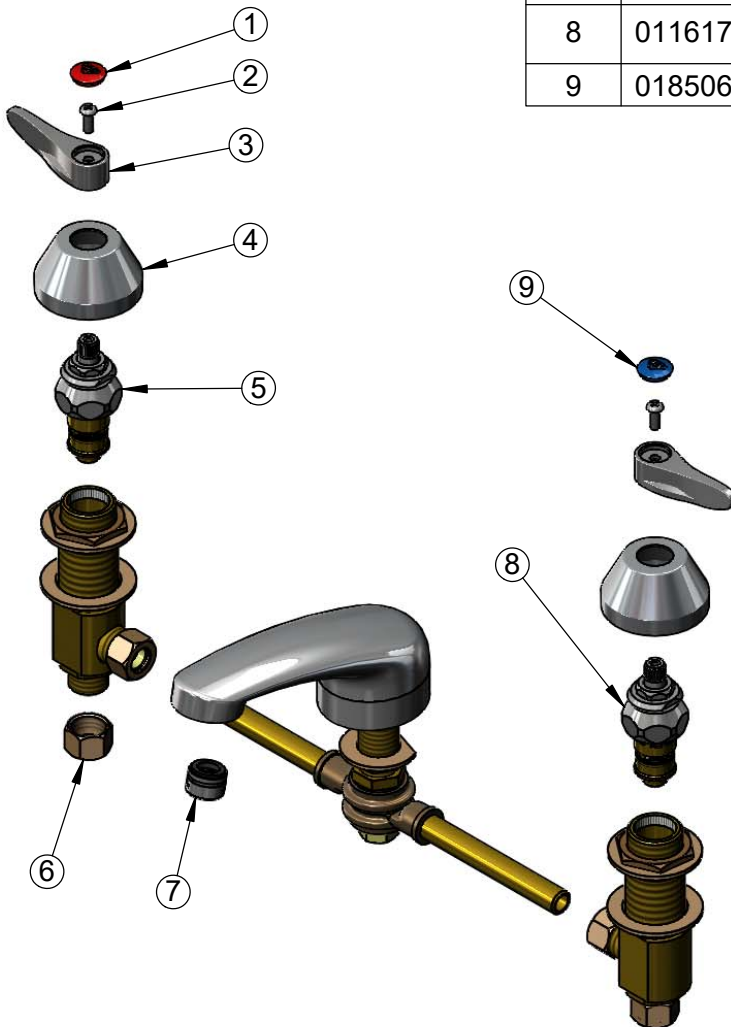

Product Specifications:

12" Concealed Widespread Mixing Faucet, Quarter-Turn Cerama Cartridges w/ Check Valves, Lever Handles, Cast Spout w/ 0.5 GPM Non-Aerated Spray Device & 1/2" NPT Male Inlets w/ Coupling Nuts

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)