



METERING FAUCET BP-0723

Installation and Maintenance Instructions

Limited One Year Warranty (Commercial Applications)

T&S warrants to the original purchaser (other than for purposes of resale) that such product is free from defects in material and workmanship for a period of one (1) year from the date of purchase. During this one-year warranty period, if the product is found to be defective, T&S shall, at its options, repair and/or replace it. To obtain warranty service, products must be returned to...

*T&S Brass and Bronze Works, Inc.
Attn: Warranty Repair Department
2 Saddleback Cove
Travelers Rest, SC 29690*

Shipping, freight, insurance, and other transportation charges of the product to T&S and the return of repaired or replaced product to the purchaser are the responsibility of the purchaser. Repair and/or replacement shall be made within a reasonable time after receipt by T&S of the returned product. This warranty does not cover items which have received secondary finishing or have been altered or modified after purchase, or for defects caused by physical abuse to or misuse of the product, or shipment of the products.

Any express warranty not provided herein, and any remedy for Breach of Contract which might arise, is hereby excluded and disclaimed. Any implied warranties of merchantability or fitness for a particular purpose are limited to one year in duration. Under no circumstances shall T&S be liable for loss of use or any special consequential costs, expenses or damages.


Some states do not allow limitations on how long and implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Specific rights under this warranty and other rights vary from state to state.

⚠ Attention California Residents:

WARNING This product can expose you to chemicals including Lead, Chromium (hexavalent compounds) and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm.


For more information go to
www.P65Warnings.ca.gov.

P/N: 098-020987-45 Rev.0
DATE: 09-14-22
DRAWN: TED
CHECKED: JRM 09-14-22
APPROVED: JHB 09-27-22

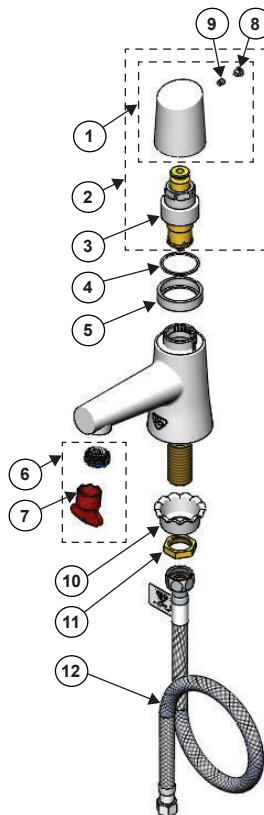

Metering Assembly

1	Push Button Metering Cap w/ Screw & Index	020817-40
2	Metering Cartridge w/ Push Button Cap	020820-40
3	Metering Cartridge	020506-40
4	Metering Cartridge Bushing	020510-45
5	Metering Thread Shield	020509-40
6	0.5 GPM Hidden Spray Device, M21.5 x 1	B-0199-M21-V05
7	M21.5 x 1 Red Cache Key	020674-45
8	Chrome Blank Index	020570-45
9	Set Screw	016675-45
10	Rosette Washer	001000-45
11	Shank Lock Nut	002954-45
12	1/2" NPSM x 3/8" Comp, Flex Supply Hose, 24"	017420-45

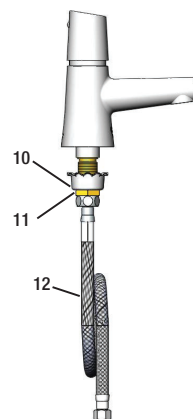

Installation Without Escutcheon:

1. Shut off water supply and drain lines. Clean sink surface thoroughly.
2. Place no.12 through hole.
3. Place no.10 and no.11 on the shank and tighten fully.
4. Connect supply lines and check for leaks.