

Quick Start Guide Model TSC3-6/18 Proofer Oven

Oven/Proofer Start-Up

Turn ON the TSC3 6/18 Main Power (left side switch)

NOTE: As part of the boot up sequence, the oven and proofer lights and fans will turn on (This takes 10 seconds) and go back off. Then the touch screen will stay on. This boot process takes about 20 seconds to complete.



to turn on the Oven



to turn on the Proofer



Boot Screen



Automatically Transitions to Main Screen

Oven and Proofer lights will turn on and start preheating.



Oven, Proofer and Recipe Buttons will turn to BLUE background.

Touch Screen Definitions

Main Tool Bar



* Screen Sleep Button only available when Oven and Proofer are off

Oven Recipe Information Bar




Recipe Name
Recipe Temp
Recipe Time

Proofer Recipe Information Bar



Recipe Humidity
Recipe Temp
Recipe Time

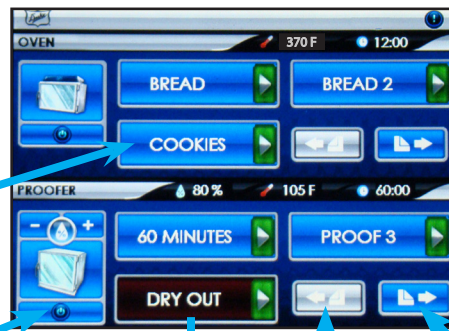


Power Button or Back

Page Back


Page Forward

Door Open

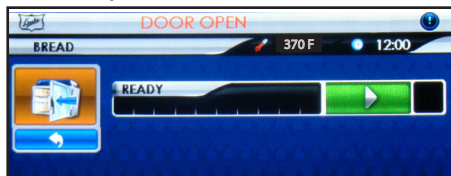

With oven door open, DOOR OPEN will flash in the Main Tool Bar and oven icon background is orange.

Touch to start Dry-Out cycle at end of use for each day.

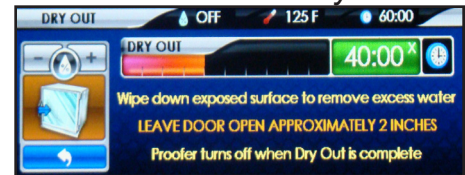

Follow instructions on screen.



Your Solutions Partner

Duke Manufacturing Company

2305 N. Broadway • St. Louis, MO 63102
1-800-735-3853 • 314-231-1130 • 314-231-5074
www.dukemfg.com


120084
Rev D 06/28/2023

Quick Start Guide Model TSC3-6/18 Proofer Oven


Oven Operating Instructions

Oven Recipe Selected:

Oven Recipe Preheat Screen
(if under temperature setpoint)

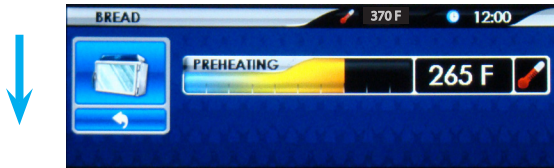


Oven Recipe Ready to Start Timer
(Load and Touch button to start)

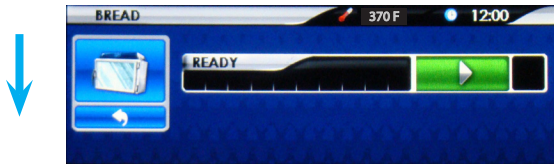


Oven Count Down Timer
(with Progress Bar)

- To cancel, press and hold the countdown timer for 2 to 3 seconds.

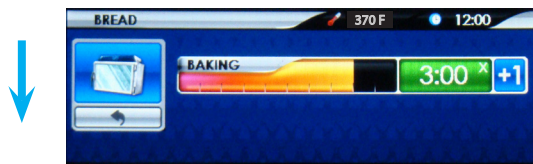


Oven Bake Complete Alarm
(with add 1 minute button)

- Touch the Timer or Open Oven Door to cancel the alarm.

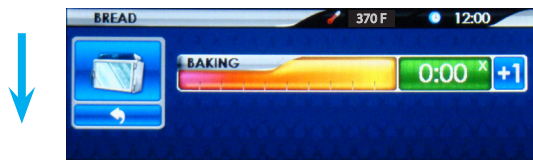


Back to Ready

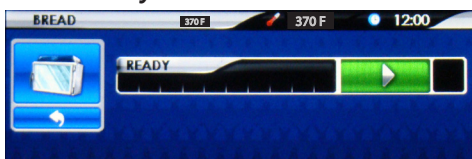


Proofer Operating Instructions

Proofer Recipe Selected:

Proofer Starting Up Screen
(if under temperature setpoint)

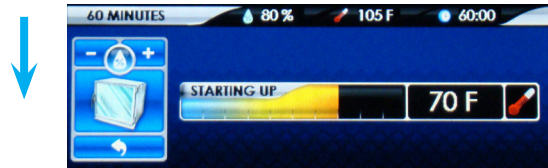


10 min. Starting Up Timer after reaching setpoint

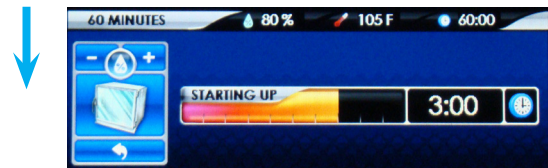


Proofer Recipe Ready to Start 1/3rd Timers:
(with Progress Bar)

- Load and Touch button to start First Section.

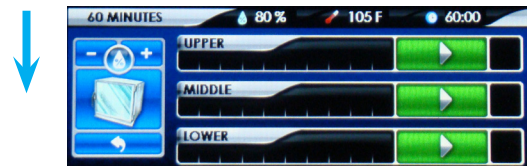

Proofer Count Down Timer
(with add 5 minute button)

- Touch button to start additional timers.
- Alarm beeps and LOAD NEXT TRAY is displayed in the Main Tool Bar 1/3rd of the time thru the proofer cycle.
- To cancel, touch and hold the countdown timer for 2 to 3 seconds.

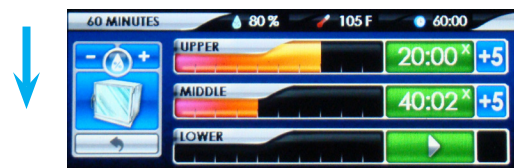

Proof Complete Alarm for UPPER 1/3rd.

- Touch the Timer or the button to cancel the alarm.

