

7. Exploded Views and Parts List(SCX-6345N/XAX)

Contents

7.1 Main	7-2	7.15 DADF Sub	7-16
7.2 Cover Unit	7-3	7.16 DADF Ass'y	7-17
7.3 Main Frame	7-4	7.17 Cassette	7-18
7.4 Base Frame	7-5	7.18 SCF	7-19
7.5 Main Drive	7-6	7.19 Fax	7-20
7.6 Exit Drive	7-7	7.20 Finisher	7-21
7.7 Exit Ass'y	7-8	7.20-1 Main	7-21
7.8 Fuser	7-9	7.20-2 Frame Unit	7-22
7.9 Pick Up Ass'y	7-10	7.20-3 Stacker Unit	7-23
7.10 Side Duplex	7-11	7.20-4 Extension Tray Unit	7-24
7.11 MP Unit	7-12	7.20-5 Ejector Unit	7-25
7.12 MP Tray	7-13	7.20-6 Compile Unit	7-26
7.13 OPE(SCX-6345N)	7-14	7.20-7 Feed Unit	7-27
7.14 Platen Ass'y	7-15		

DIGITAL LASER MFP




The keynote of Product

The alternative of A3 copier models.

- Print Speed:
 - Simplex Print: Up to 45 ppm/Ltr, 43 ppm/A4
 - Duplex Print: Up to 40 ppm/A4
- Main Processor: SPGPv3(400MHz) + CIP4e
- Device Memory(SDRAM):
 - 256MB System Memory (FAX:16MB), Max. 384MB
 - Option : 128MB (DIMM Slot 1EA)
- Toner(20K), Drum(60K)
- Standard:
 - Copy
 - Direct Print & N/W Print
 - Direct Scan (USB)
 - DADF
 - HDD(40GB)
- Option:
 - N/W Scan/OEK(Option Enable Key)
 - FAX/Smart DAA, Single LIU
 - SCF (550 sheet)
 - Finisher with Stapler
 - Ext. Memory: 256MB
 - Stand: Short/Tall
- Machine Life: 1,000K Pages
 - Average Monthly Print Volume: 10K Pages

7.1 Main

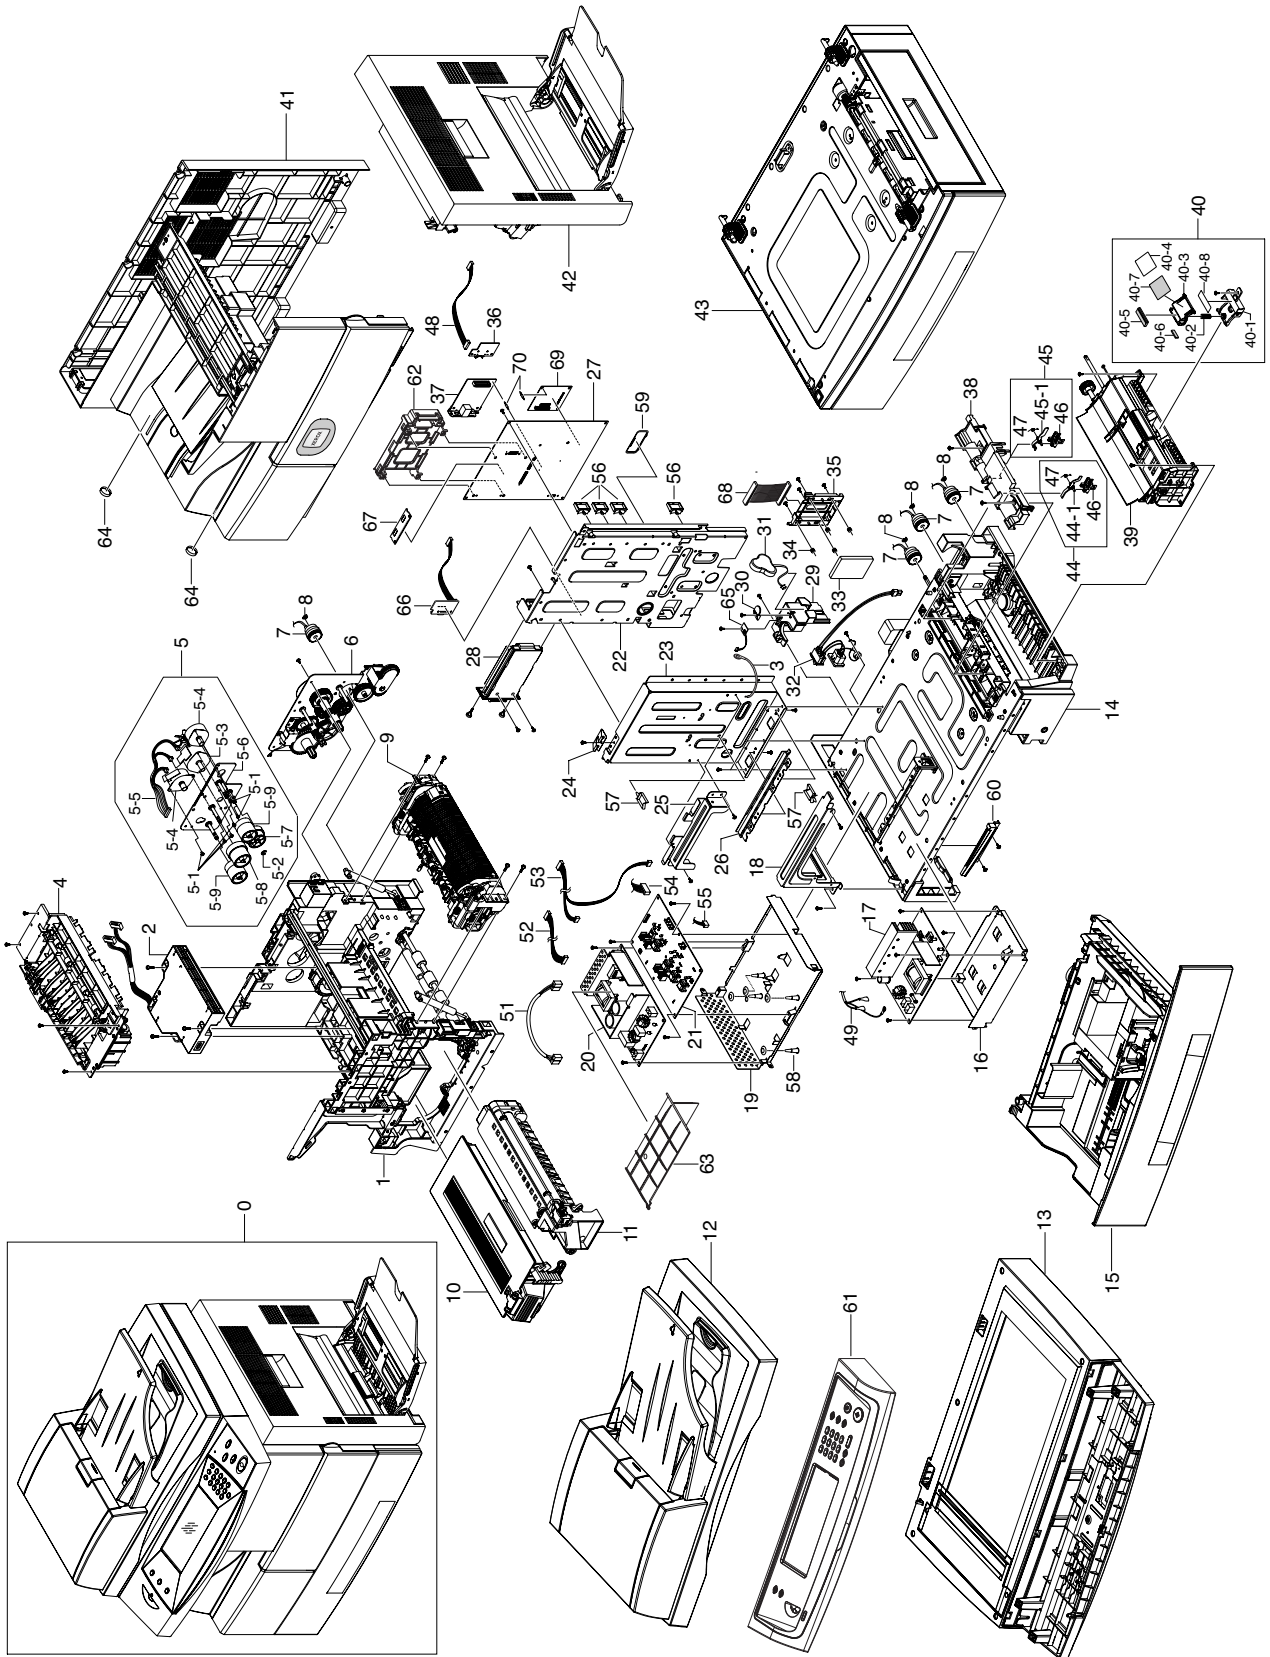

Main Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.1-0	SCX-6345N/XAA	SET		SNA
7.1-1	JC96-03552B	ELA HOU-FRAME MAIN	Z4545	SA
7.1-2	JC59-00025A	UNIT-LSU	Z4546	SA
7.1-3	JB39-00065A	CBF HARNESS-DRIVER GND		SNA
7.1-4	JC96-03529A	ELA HOU-EXIT	Z4547	SA
7.1-5	JC96-03537A	ELA HOU-DRIVE FUSER	Z4548	SA
7.1-6	JC96-03528A	ELA HOU-DRIVE MAIN	Z4549	SA
7.1-7	JC66-00994A	CLUTCH-5K Z32	Z4550	SA
7.1-8	JC61-01367A	FIXER-M_E RING 4PI		SNA
7.1-9	JC96-03724A	ELA HOU-FUSER	Z4622	SA
7.1-10	JC96-03538B	ELA HOU-TONER		SNA
7.1-11	JC96-03544B	ELA HOU-DEVE UNIT		SNA
7.1-12	JC96-03553B	ELA HOU-DADF	Z4665	SA
7.1-13	JC96-03550B	ELA HOU-PLATEN	Z4656	SA
7.1-14	JC96-03746B	ELA HOU-BASE FRAME		SNA
7.1-15	JC97-02273B	MEA UNIT-CASSETTE	Z4551	SA
7.1-16	JC63-00831A	SHIELD-P-BD INVERTER		SNA
7.1-17	JC44-00113A	INVERTER-V1	Z4552	SA
7.1-18	JC61-01309A	PLATE-P-FINISHER F		SNA
7.1-19	JC63-00832A	SHIELD-P-SMPS LOWER		SNA
7.1-20	JC44-00093A	SMPS-PSP_TYPE5_V1	S0014	SA
7.1-21	JC44-00103A	HVPS-JUNGFRAU	Z4553	SA
7.1-22	JC63-00827A	SHIELD-P-MAIN LOWER		SNA
7.1-23	JC61-01310A	PLATE-P-SUPPORT SCAN		SNA
7.1-24	JC63-00791A	GROUND-P-SPRING SCAN		SNA
7.1-25	JC61-01311A	PLATE-P-FINISHER REAR		SNA
7.1-26	JC61-01314A	GUIDE-P-SHIELD SMPS		SNA
7.1-27	JC92-01690B	PBA MAIN-MFP		SA
7.1-28	JC96-04081B	ELA HOU-FAX; Option Unit		SNA
7.1-29	JC67-00113A	CAP-M_INLET		SNA
7.1-30	JC61-00667A	STOPPER-M-FAN80	F5029	SA
7.1-31	4302-001183	BATTERY-NIH(2ND)	Z6206	SA
7.1-32	JC39-00610A	HARNESS-POWER_SW	Z4556	SA
7.1-33	JC59-00026A	HDD-DISC_HARD	Z4557	SA
7.1-34	JC73-00215A	RUBBER-DAMPER HDD	Z4558	SA
7.1-35	JC61-01389A	HOLDER-M_HDD		SNA
7.1-36	JC96-03969A	SIMM MODULE		SNA
7.1-37	JC96-03659B	ELA HOU-NPC3_HIGH	Z4559	SA
7.1-38	JC61-01295A	PLATE-M_FEED UPPER	Z4560	SA
7.1-39	JC96-03557A	ELA HOU-MP	Z4561	SA
7.1-40	JC97-02260A	MEA UNIT-HOLDER PAD	Z4562	SA
7.1-40-1	JC61-01415A	GUIDE-M_PAD LOWER		SNA
7.1-40-2	JC61-00013A	SPRING ETC-PAD	S0028	SA

Main Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.1-40-3	JC61-00744A	HOLDER-M-ADF RUBBER UPPER		SNA
7.1-40-4	JC63-01085A	SHEET-GUIDE MP		SNA
7.1-40-5	JB73-00052A	RMO-ADF RUBBER	Z4373	SA
7.1-40-6	JC73-00079A	RPR-SEAL SIDE	Z4563	SA
7.1-40-7	JC73-00235A	RUBBER-GUIDE MP	Z4564	SA
7.1-40-8	JC73-00141A	RPR-PAD CASSETTE	R0020	SA
7.1-41	JC97-02285B	MEA UNIT-COVER		SNA
7.1-42	JC96-03525B	ELA HOU-SIDE DUPLEX	Z4647	SA
7.1-43	JC96-03530B	ELA HOU-SCF; Option Unit		SNA
7.1-44	JC97-02702A	MEA UNIT-ACT FEED	Z4565	SA
7.1-44-1	JC61-01426A	LEG-M_ACT FEED BASE	Z4566	SA
7.1-46	JC61-01421A	HOLDER-M_ACT_FEED	Z4567	SA
7.1-47	6107-001262	SPRING-TS	Z4642	SA
7.1-45	JC97-02703A	MEA UNIT-ACT REGI	Z4568	SA
7.1-45-1	JC61-01408A	LEG-M_ACTUATOR REGI	Z4569	SA
7.1-46	JC61-01421A	HOLDER-M_ACT_FEED	Z4567	SA
7.1-47	6107-001262	SPRING-TS	Z4642	SA
7.1-48	JC39-00344A	CBF HARNESS-SENSOR_IF	Z4664	SA
7.1-49	JC39-00546A	HARNESS-FUSER_FR	Z4570	SA
7.1-51	JC39-00611A	HARNESS-IH_AC	Z4571	SA
7.1-52	JC39-00460A	HARNESS-SMPS	Z4572	SA
7.1-53	JC39-00469A	HARNESS-HVPS_IH	Z4573	SA
7.1-54	JC39-00544A	CBF HARNESS-HVPS(8P)	Z4574	SA
7.1-55	JC39-00545A	CBF HARNESS-HVPS(3P)	Z4575	SA
7.1-56	6502-000132	CABLE CLAMP		SNA
7.1-57	6502-000132	CABLE CLAMP	Z4538	SNA
7.1-58	6103-000101	SUPPORTER		SNA
7.1-59	JC61-01012A	GUIDE-_M_BUSH HARNESS S	G0039	SNA
7.1-60	JC63-00728B	COVER-EXIT BRACKET	Z4576	SA
7.1-61	JC96-03546C	ELA HOU-OPE		SNA
7.1-62	JC61-01406A	HOLDER-M_LIU	Z4577	SA
7.1-63	JC63-01050A	COVER-M_BARRIER		SNA
7.1-64	JC67-00164A	CAP-HOLE SCREW	Z4578	SA
7.1-65	JC92-01568A	PBA SUB-AIR_TMP	M0295	SA
7.1-66	JC96-03150A	ELA HOU-FDI OPTION		SNA
7.1-67	JC92-01543A	PBA SUB-DIMM MODULE	Z4579	SA
7.1-68	JC39-00511A	CBF HARNESS-HDD	Z4580	SA
7.1-69	JC92-01698A	PBA ETC-HDD	Z4581	SA
7.1-70	6045-001009	SPACER-ROUND	Z4582	SA

7.2 Cover Unit

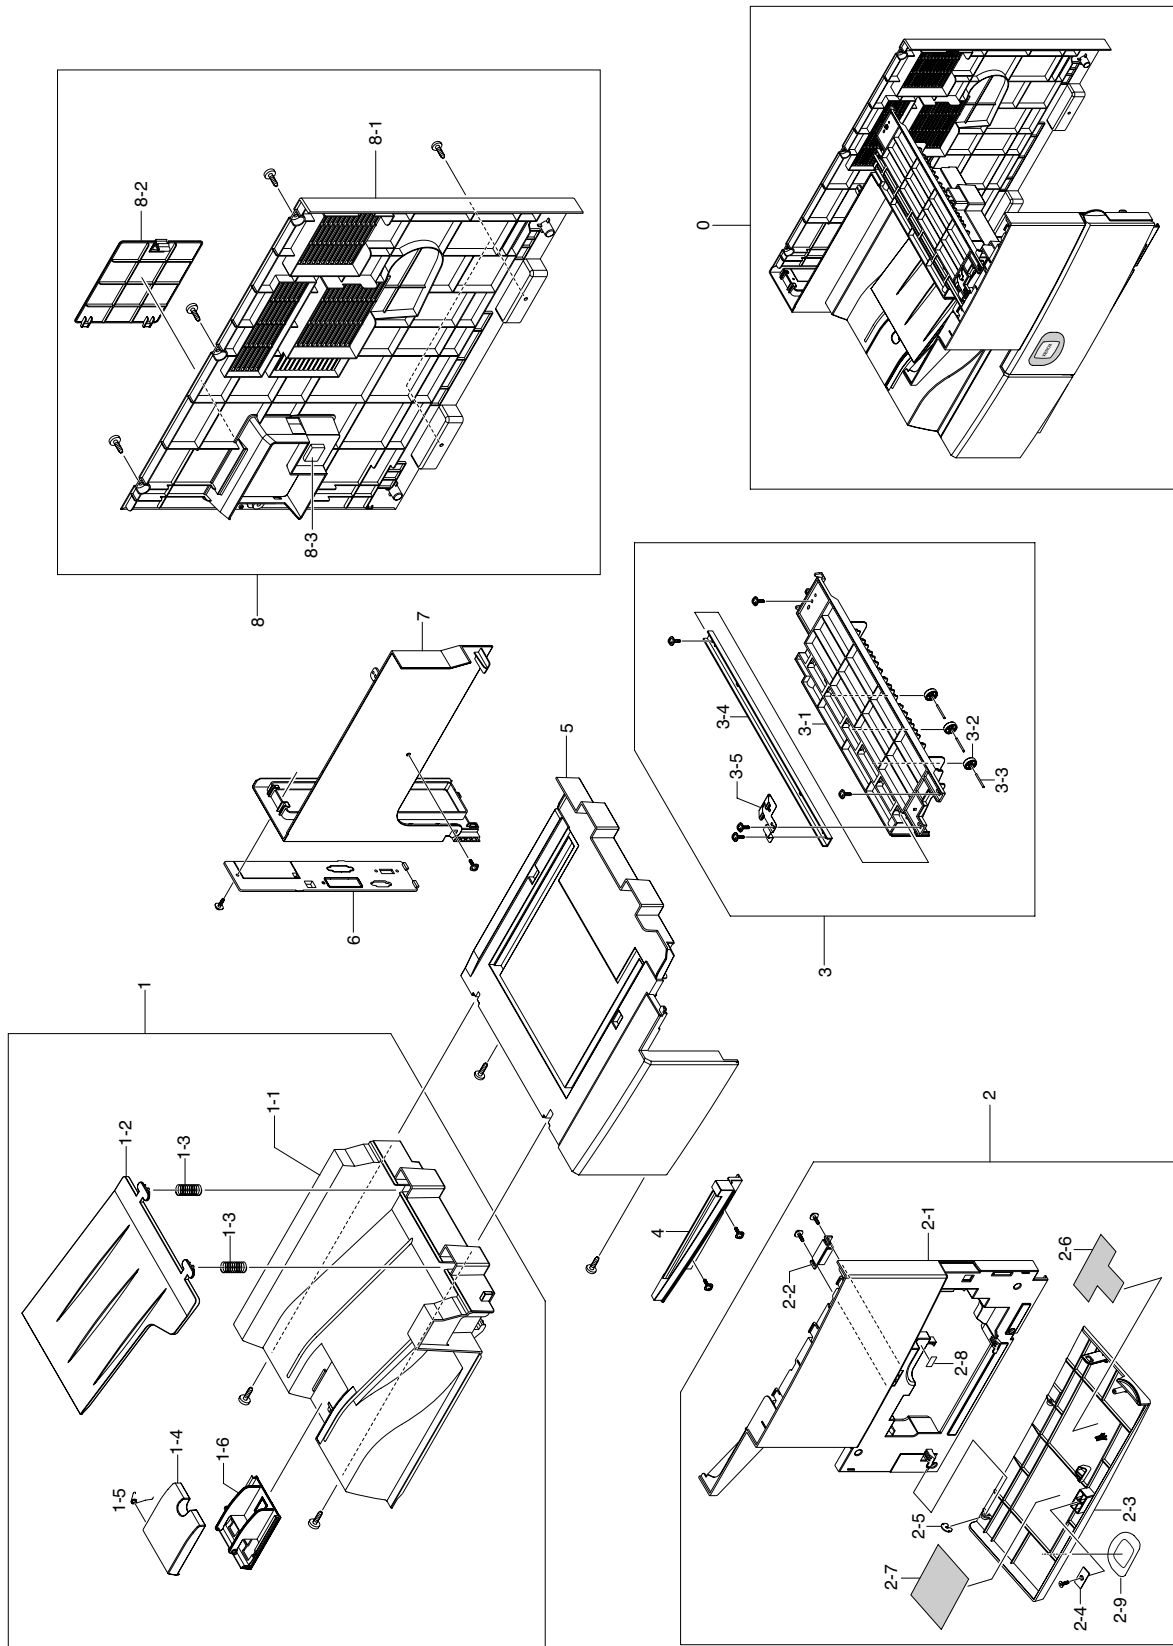


Cover Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.2-0	JC97-02285B	MEA UNIT-COVER		SNA
7.2-1	JC97-02258B	MEA UNIT-COVER TOP	Z4583	SA
7.2-1-1	JC63-00731B	COVER-EXIT REAR	Z4584	SA
7.2-1-2	JC63-00739B	COVER-GUIDE STACKER		SNA
7.2-1-3	6107-000014	SPRING-CS	S0089	SA
7.2-1-4	JC63-00738B	COVER-EXIT STACKER		SNA
7.2-1-5	6107-001262	SPRING-TS		SNA
7.2-1-6	JC63-00737B	COVER-EXIT ST LOWER		SNA
7.2-2	JC97-02706C	MEA UNIT-COVER FRONT		SNA
7.2-2-1	JC63-00733B	COVER-FRONT INNER		SNA
7.2-2-2	JC61-00961A	MAGNET-CATCH DELL		SNA
7.2-2-3	JC63-00200B	COVER-FRONT		SNA
7.2-2-4	JC61-00962A	PLATE-MAGNET CATCH		SNA
7.2-2-5	6044-000159	RING-C	Z4357	SA
7.2-2-6	JC68-01622B	LABEL-INSTALLATION		SNA
7.2-2-7	JC68-01622B	LABEL-INSTALLATION		SNA
7.2-2-8	JC68-01694B	LABEL-INSTRUCTION		SNA
7.2-3	JC97-02274B	MEA UNIT-COVER UPPER	Z4585	SA
7.2-3-1	JC63-00734B	COVER-EXIT UPPER		SNA
7.2-3-2	JC66-01019A	ROLLER-M EXIT DP IDLE	Z4586	SA
7.2-3-3	JC70-00064A	IPR-PIN ROLLER EXIT	Z4605	SNA
7.2-3-4	JC61-01353A	BRACKET-P-CHANNEL		SNA
7.2-3-5	JC63-00740A	GROUND-P-OPE		SNA
7.2-4	JC63-00728B	COVER-EXIT BRACKET	Z4576	SA
7.2-5	JC63-00727B	COVER-EXIT BOTTOM	Z4587	SA
7.2-6	JC63-00732C	COVER-PANEL MFP	Z4588	SA
7.2-7	JC63-00731B	COVER-EXIT REAR	Z4584	SA
7.2-8	JC97-02374B	MEA UNIT-COVER REAR	Z4589	SA
7.2-8-1	JC63-00729B	COVER-MAIN REAR		SNA
7.2-8-2	JC63-00730B	COVER-REAR DUMMY		SNA
7.2-8-3	JG61-40001A	FOOT-SF4000	F1017	SA

7.3 Main Frame

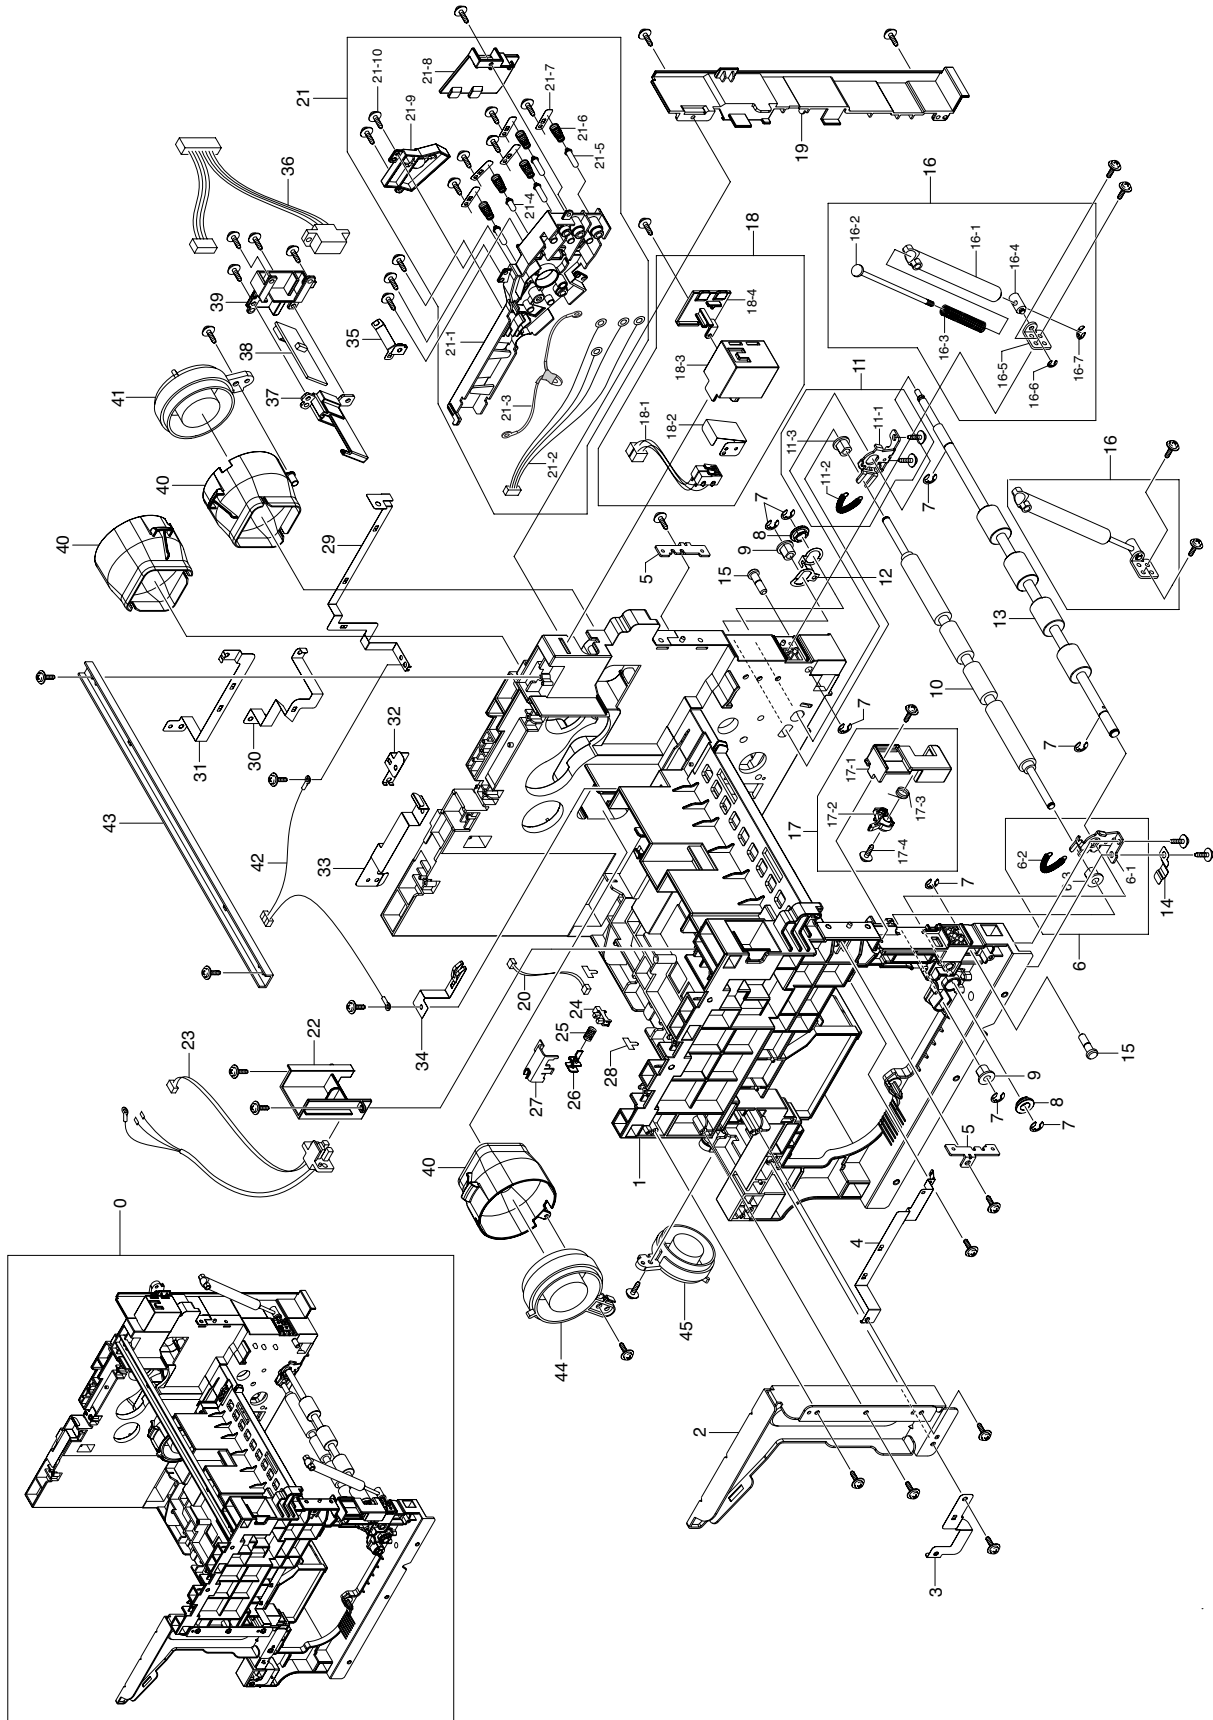

Main Frame Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.3-0	JC96-03552B	ELA HOU-FRAME MAIN	Z4545	SA
7.3-1	JC61-01315A	FRAME-M_MAIN		SNA
7.3-2	JC61-01360A	BRACKET-P-SUP SCAN F		SNA
7.3-3	JC63-00801A	GROUND-P-OPE SIDE		SNA
7.3-4	JC63-00802A	GROUND-P-OPC CONTACT		SNA
7.3-5	JC61-01285A	HOLDER-P-FUSER		SNA
7.3-6	JC97-02262A	MEA UNIT-REGI F	Z4590	SA
7.3-6-1	JC61-01355A	BRACKET-P-REGI F		SNA
7.3-6-2	6107-001257	SPRING-ES	Z4544	SA
7.3-6-3	JC61-00884A	BUSH-6_D(L)		SNA
7.3-7	6044-000125	RING-E	R0006	SA
7.3-8	JC61-00426A	BUSH-8/5	B0026	SA
7.3-9	JC61-00423A	BUSH-6_D	B0025	SA
7.3-10	JC66-01028A	ROLLER-IDLE REGI	Z4591	SA
7.3-11	JC97-02261A	MEA UNIT-REGI R	Z4592	SA
7.3-11-1	JC61-01356A	BRACKET-P-REGI R		SNA
7.3-11-2	6107-001257	SPRING-ES	Z4544	SA
7.3-11-3	JC61-00884A	BUSH-6_D(L)		SNA
7.3-12	JC63-00804A	GROUND-P-FEED		SNA
7.3-13	JC66-01029A	ROLLER-DR REGI	Z4593	SA
7.3-14	JC63-00803A	GROUND-P-REGI		SNA
7.3-15	JC66-00960A	SHAFT-DUP GUIDE		SNA
7.3-16	JC97-02301A	MEA UNIT-DAMPER,L	Z4594	SA
7.3-16-1	JC61-00194A	CASE-DAMPER DUP		SNA
7.3-16-2	JC61-00196A	SHAFT-DAMPER DUP		SNA
7.3-16-3	6107-000014	SPRING-CS		SNA
7.3-16-4	JC61-00197A	HINGE-SHAFT DUP		SNA
7.3-16-5	JC61-00310A	BRACKET-L DAMPER DUP		SNA
7.3-16-6	6044-000159	RING-C	Z4357	SA
7.3-16-7	6044-000125	RING-E	R0001	SA
7.3-17	JC97-02263A	MEA UNIT-F DR	Z4595	SA
7.3-17-1	JC63-00741A	COVER-M_FRONT DUMMY		SNA
7.3-17-2	JC61-01358A	BRACKET-M_SIDE OPEN		SNA
7.3-17-3	JC61-00486A	SPRING ETC-TORSION	Z4271	SA
7.3-17-4	6003-000221	SCREW-TAPTITE	Z4397	SA
7.3-18	JC96-03534A	ELA HOU-CVR OPN	Z4596	SA
7.3-18-1	JC39-00541A	HARNES-COVER_SW	Z4597	SA
7.3-18-2	JC63-00753A	GUARD-P_SW		SNA
7.3-18-3	JC61-01354A	HOUSING-M_SIDE DR SNR		SNA
7.3-18-4	JC63-00760A	COVER-M_SIDE DOOR SNR		SNA
7.3-19	JC61-01316A	FRAME-M_COVER REAR		SNA
7.3-20	JC39-00466A	CBF HARNES-COVER_EXT	Z4598	SA
7.3-21	JC96-03535A	ELA HOU-TERMINAL	Z4599	SA

Main Frame Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.3-21-1	JC61-01357A	HOUSING-M_TERMINAL		SNA
7.3-21-2	JC39-00544A	CBF HARNESS-HVPS(8P)	Z4574	SA
7.3-21-3	JC96-04056A	ELA HOU-VARISTOR	Z4600	SA
7.3-21-4	JC70-40912A	ICT-SHAFT HV LARGE	O1100	SA
7.3-21-5	JC66-00979A	SHAFT-TERMINAL_16L		SNA
7.3-21-6	JC61-70930A	SPRING ETC-HV SMALL	S0023	SA
7.3-21-7	JC61-01330A	PLATE-P-TERMIANL_HV		SNA
7.3-21-8	JC63-00757A	COVER-M_TERMINAL DUP		SNA
7.3-21-9	JC63-00742A	COVER-M_TERMINAL		SNA
7.3-21-10	6003-000221	SCREW-TAPTITE	Z4397	SA
7.3-22	JC61-01286A	HOLDER-M_FUSER TERM		SNA
7.3-23	JC39-00546A	HARNESS-FUSER_FR	Z4570	SA
7.3-24	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.3-25	6107-000014	SPRING-CS	Z4639	SA
7.3-26	JC61-01361A	LEG-M_BAR FINISHER		SNA
7.3-27	JC63-00830A	COVER-M_ACT		SNA
7.3-28	6502-000132	CABLE CLAMP	C0002	SA
7.3-29	JC63-00797A	GROUND-P-P FUSER		SNA
7.3-30	JC63-00789A	GROUND-P-MAIN DRV		SNA
7.3-31	JC63-00790A	GROUND-P-FUSER DRV		SNA
7.3-32	JC63-00798A	GROUND-P-EXIT		SNA
7.3-33	JC63-00800A	GROUND-P-OPE REAR		SNA
7.3-34	JC63-00796A	GROUND-P-H FUSER		SNA
7.3-35	JC63-00799A	GROUND-P-MAIN DRIVE L		SNA
7.3-36	JC39-00646A	HARNESS-DEVE_RF	Z4601	SA
7.3-37	JC61-01359A	HOUSING-M_COUPLER		SNA
7.3-38	JC92-01862A	PBA-RFID	Z4602	SA
7.3-39	JC61-01287A	HOLDER-M_DEVE CONN		SNA
7.3-40	JC67-00127A	DUCT-M_FAN LSU	Z4603	SA
7.3-41	JC31-00025B	FAN-DC	D2107	SA
7.3-42	JC39-00545A	CBF HARNESS-HVPS(3P)	Z4575	SA
7.3-43	JC61-01353A	BRACKET-P-CHANNEL		SNA
7.3-44	JC31-00012B	FAN-DC LSU	Z4604	SA
7.3-45	JC31-00012C	FAN-DC INVERTER	Z4605	SA

7.4 Base Frame

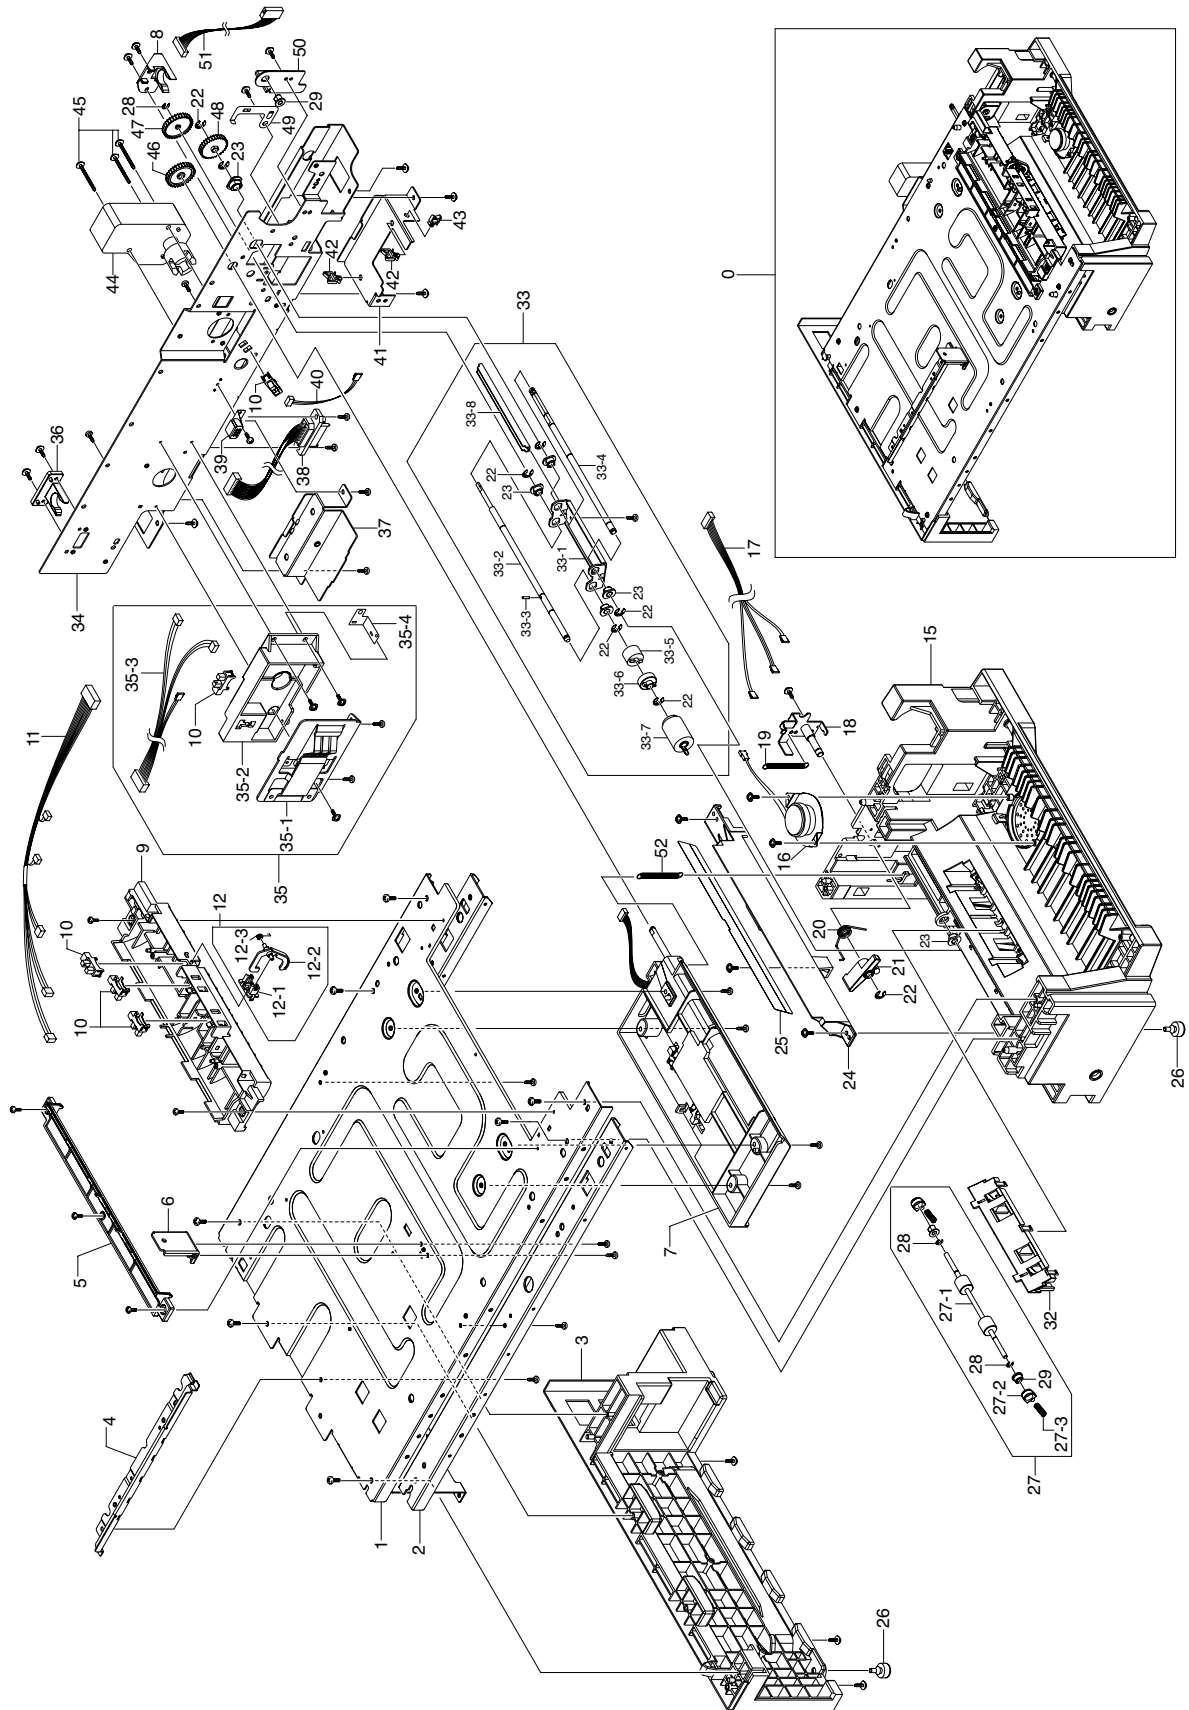

Base Frame Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.4-0	JC96-03746B	ELA HOU-BASE FRAME		SNA
7.4-1	JC61-01337A	BASE-P-PLATE		SNA
7.4-2	JC61-01312A	PLATE-P-BEAM BASE		SNA
7.4-3	JC61-01342B	HOUSING-BASE LEFT		SNA
7.4-4	JC61-01314A	GUIDE-P-SHIELD SMPS		SNA
7.4-5	JC61-01296A	GUIDE-M_FEED UPPER		SNA
7.4-6	JC61-01347A	BRACKET-P-JOINT BASE		SNA
7.4-7	JC96-03558A	ELA HOU-PICK UP	Z4606	SA
7.4-8	JC61-01344A	HOLDER-M_CST R		SNA
7.4-9	JC61-01294A	GUIDE-M_FEED DP		SNA
7.4-11	JC39-00512A	CBF HARNESS-REGI	Z4607	SA
7.4-12	JC97-02704A	MEA UNIT-ACT READY		SNA
7.4-12-1	JC61-01422A	HOLDER-M_ACT READY	Z4608	SA
7.4-12-2	JC61-01435A	LEG-M_ACT READY DP	Z4609	SA
7.4-12-3	JB61-00076A	SPRING ETC-TORSION DOC (CC2-F)	O1013	SA
7.4-15	JC61-01341B	HOUSING-BASE RIGHT	Z4610	SA
7.4-16	3001-001858	SPEAKER	Z4611	SA
7.4-17	JC39-00543A	HARNESS-SPK_MP	Z4612	SA
7.4-18	JC61-01423A	BRACKET-P-ARM FRIC		SNA
7.4-19	6107-001257	SPRING-ES	Z4626	SA
7.4-20	6107-001262	SPRING-TS		SNA
7.4-21	JC66-00959A	LEVER-M_ARM FRICTION	Z4613	SA
7.4-22	6044-000125	RING-E	R0004	SA
7.4-23	JC61-00423A	BUSH-6_D	B0025	SA
7.4-24	JC61-01313A	GUIDE-M_PICKUP BASE		SNA
7.4-25	JC63-00795A	SHEET-GUIDE FILM BASE	Z4614	SA
7.4-26	JC61-40001A	FOOT-ML80	F0003	SA
7.4-27	JC97-02705A	MEA UNIT-FEED IDLE MP	Z4615	SA
7.4-27-1	JC66-01027A	ROLLER-RUBBER IDLE		SNA
7.4-27-2	JC61-01434A	HOLDER-M_BUSHING IDLE		SNA
7.4-27-3	JC61-00046A	SPRING ETC-TR R HAWK	Z4404	SNA
7.4-28	6044-000159	RING-C	Z4357	SA
7.4-29	JC61-00424A	BUSH-4	K2867	SA
7.4-32	JC61-01297A	GUIDE-M_FEED IDLE MP	Z4616	SA
7.4-33	JC97-02290A	MEA UNIT-RETARD	Z4617	SA
7.4-33-1	JC61-01348A	BRACKET-P-RETARD		SNA
7.4-33-2	JC66-00937A	SHAFT-RETARD S	Z4618	SA
7.4-33-3	JC66-00939A	SHAFT-LOCK	Z4619	SA
7.4-33-4	JC66-00938A	SHAFT-RETARD M		SNA
7.4-33-5	JC67-00126A	COUPLER-TORQUELIMITER	Z4790	SA
7.4-33-6	JC66-00976A	JOINT-M_RETARD	Z4789	SA
7.4-33-7	JC97-02259A	MEA UNIT-ROLLER PU	Z4798	SA
7.4-33-8	JC61-01349A	BRACKET-P-BAR RETARD		SNA

Base Frame Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.4-34	JC61-01338A	BASE-P-PLATE REAR		SNA
7.4-35	JC96-03735A	ELA HOU-SIZE SENSOR	Z4759	SA
7.4-35-1	JC96-02127A	ELA HOU-CST SENSOR HAWK16	Z2263	SA
7.4-35-2	JC61-01343A	HOUSING-M_SIZE SENSOR		SA
7.4-35-3	JC39-00467A	HARNES-TRAY_SIZE		SA
7.4-35-4	JC63-00794A	GROUND-P-PAPER SIZE		SA
7.4-10	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.4-36	JC61-01345A	HOLDER-M_CST L		SNA
7.4-37	JC61-01340A	BRACKET-P_HANDLE L		SNA
7.4-38	JC39-00472A	HARNES-SCF_MAIN		SA
7.4-39	JC70-11028A	IPR-GROUND TOP	K3332	SA
7.4-40	JC37-00554A	CBF HARNES-NEAR SEN		SNA
7.4-41	JC61-01436A	BRACKET-P_HANDLE R		SNA
7.4-42	6502-000132	CABLE CLAMP		SNA
7.4-43	6502-000132	CABLE CLAMP	C0069	SA
7.4-44	JC31-00045A	MOTOR GEARED-P LIFT		SA
7.4-46	JC66-00974A	GEAR-M_FORWARD	Z4693	SA
7.4-47	JC66-00975A	GEAR-M_RETARD	Z4694	SA
7.4-48	JC66-00973A	GEAR-M_PICKUP IDLE B	Z4692	SA
7.4-49	JC63-00833A	GROUND-P-SHAFT RETARD	Z4737	SA
7.4-50	JC61-01346A	HOLDER-P-MP FEED		SNA
7.4-51	JC39-00468A	HARNES-DUPLX_MAN	Z4730	SA
7.4-52	6107-001257	SPRING-ES	Z4624	SA

7.5 Main Drive

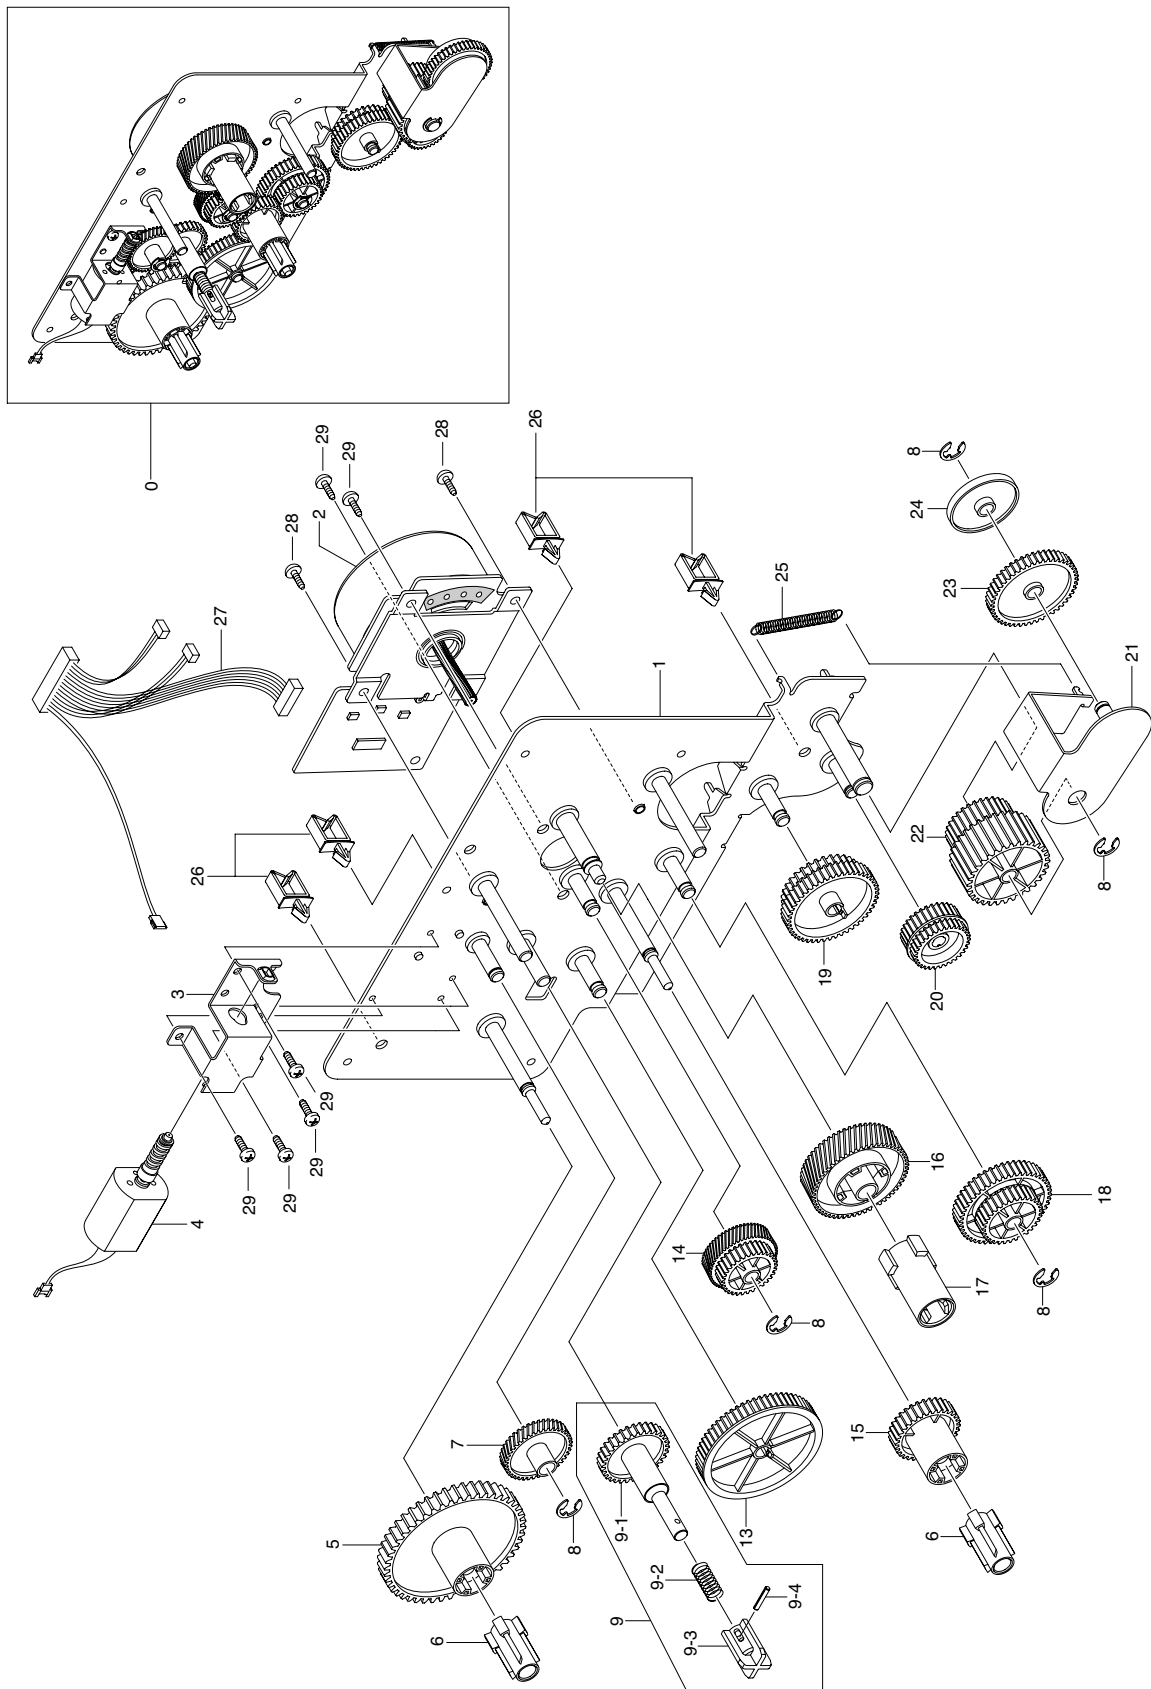


Main Drive Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.5-0	JC96-03528A	ELA HOU-DRIVE MAIN	Z4549	SA
7.5-1	JC61-01368A	BRACKET-P-MAIN		SNA
7.5-2	JC31-00038A	MOTOR DC-MAIN(BLDC)	M0011	SA
7.5-3	JC61-01370A	BRACKET-P-TONER MOTOR		SNA
7.5-4	JC96-03545A	ELA HOU-TONER DRIVE		SNA
7.5-5	JC66-00986A	GEAR-M_AGITATOR	Z4698	SA
7.5-6	JC72-00743A	PMO-DEV/COUPLING	K3874	SA
7.5-7	JC66-00993A	GEAR-M_SUPPLY IDLE	Z4704	SA
7.5-8	6044-000125	RING-E	R0006	SA
7.5-9	JC97-02681A	MEA UNIT-GEAR SUPPLY	Z4725	SA
7.5-9-1	JC66-00992A	GEAR-M_SUPPLY		SNA
7.5-9-2	JC61-00396A	SPRING ETC-COIL CONTAINER	Z4152	SA
7.5-9-3	JC72-00621A	JOINT-COUPLING_CONTAINER	K3428	SA
7.5-9-4	6043-001028	PIN-SPRING		SA
7.5-13	JC66-00989A	GEAR-M_AGI IDLE	Z4701	SA
7.5-14	JC66-00983A	GEAR-M_REGI IDLE A	Z4749	SA
7.5-15	JC66-00985A	GEAR-M_MIXER	Z4697	SA
7.5-16	JC66-00982A	GEAR-M_OPC BASE	Z4695	SA
7.5-17	JC67-00115A	OTHER MECHA-M CPL OPC	Z4713	SA
7.5-18	JC66-00984A	GEAR-M_REGI IDLE B	Z4696	SA
7.5-19	JC66-00987A	GEAR-M_PICKUP IDLE A	Z4699	SA
7.5-20	JC66-00988A	GEAR-M_MP IDLE A	Z4700	SA
7.5-21	JC61-01369A	BRACKET-P-DPX SWING		SNA
7.5-22	JC66-00990A	GEAR-M_MP IDLE B	Z4702	SA
7.5-23	JC66-00991A	GEAR-M_DUPLEX IDLE	Z4703	SA
7.5-24	JC67-00116A	OTHER MECHA-M COLLAR DP		SNA
7.5-25	JC61-70950A	SPRING ETC-EXTENSION	S0022	SA
7.5-26	6502-000132	CABLE CLAMP	C0069	SA
7.5-27	JC39-00475A	HARNESS-MOTOR	Z4680	SA
7.5-28	6003-000221	SCREW-TAPTITE		SNA
7.5-29	6003-000221	SCREW-TAPTITE	Z4513	SA

7.6 Exit Drive

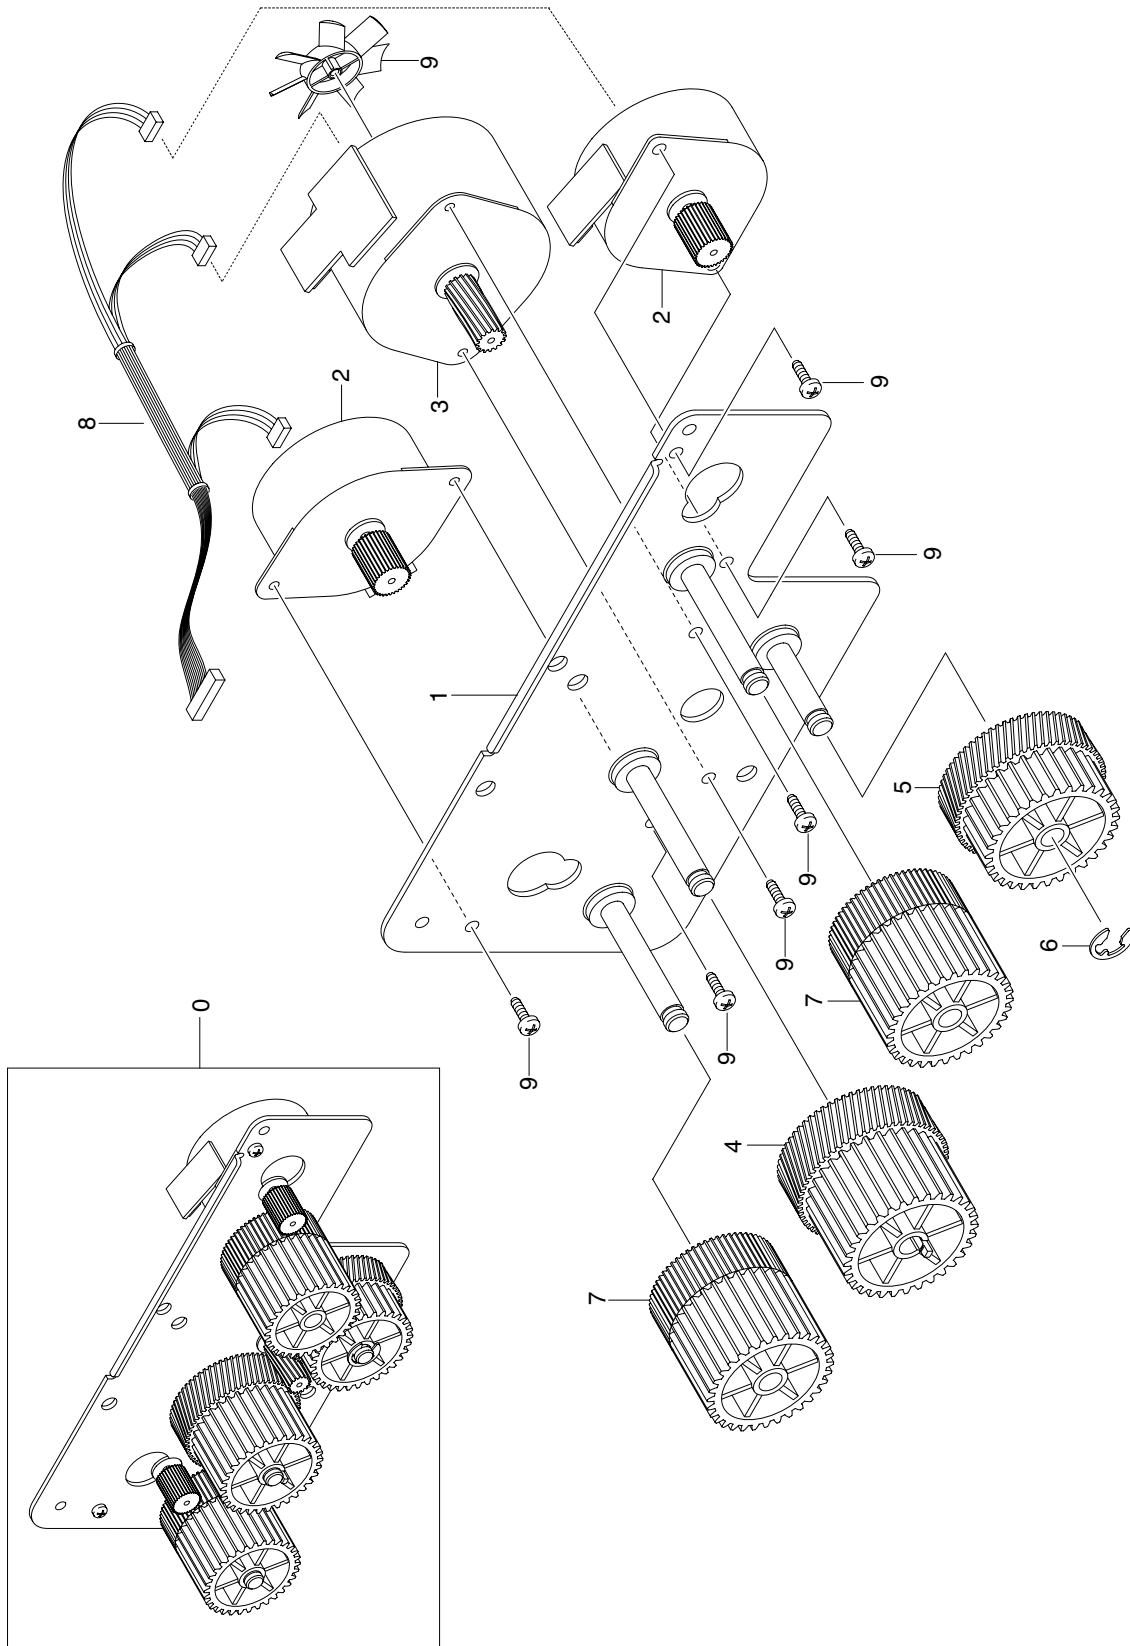


Exit Drive Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.6-0	JC96-03537A	ELA HOU-DRIVE FUSER	Z4548	SA
7.6-1	JC61-01371A	BRACKET-P-FUSER EXIT		SNA
7.6-2	JC31-00043A	MOTOR STEP-SCAN	Z4677	SA
7.6-3	JC31-00020B	MOTOR STEP-MAIN	M2161	SA
7.6-4	JC66-00996A	GEAR-M_EXIT IDLE A	Z4706	SA
7.6-5	JC66-00995A	GEAR-M_FUSER IDLE A	Z4705	SA
7.6-6	6044-000125	RING-E	R0006	SA
7.6-7	JC66-00997A	GEAR-M_EXIT IDLE C	Z4707	SA
7.6-8	JC39-00470A	CBF HARNESS-MOTOR_STP	Z4678	SA
7.6-9	6003-000221	SCREW-TAPTITE	Z4513	SA

7.7 Exit Ass'y

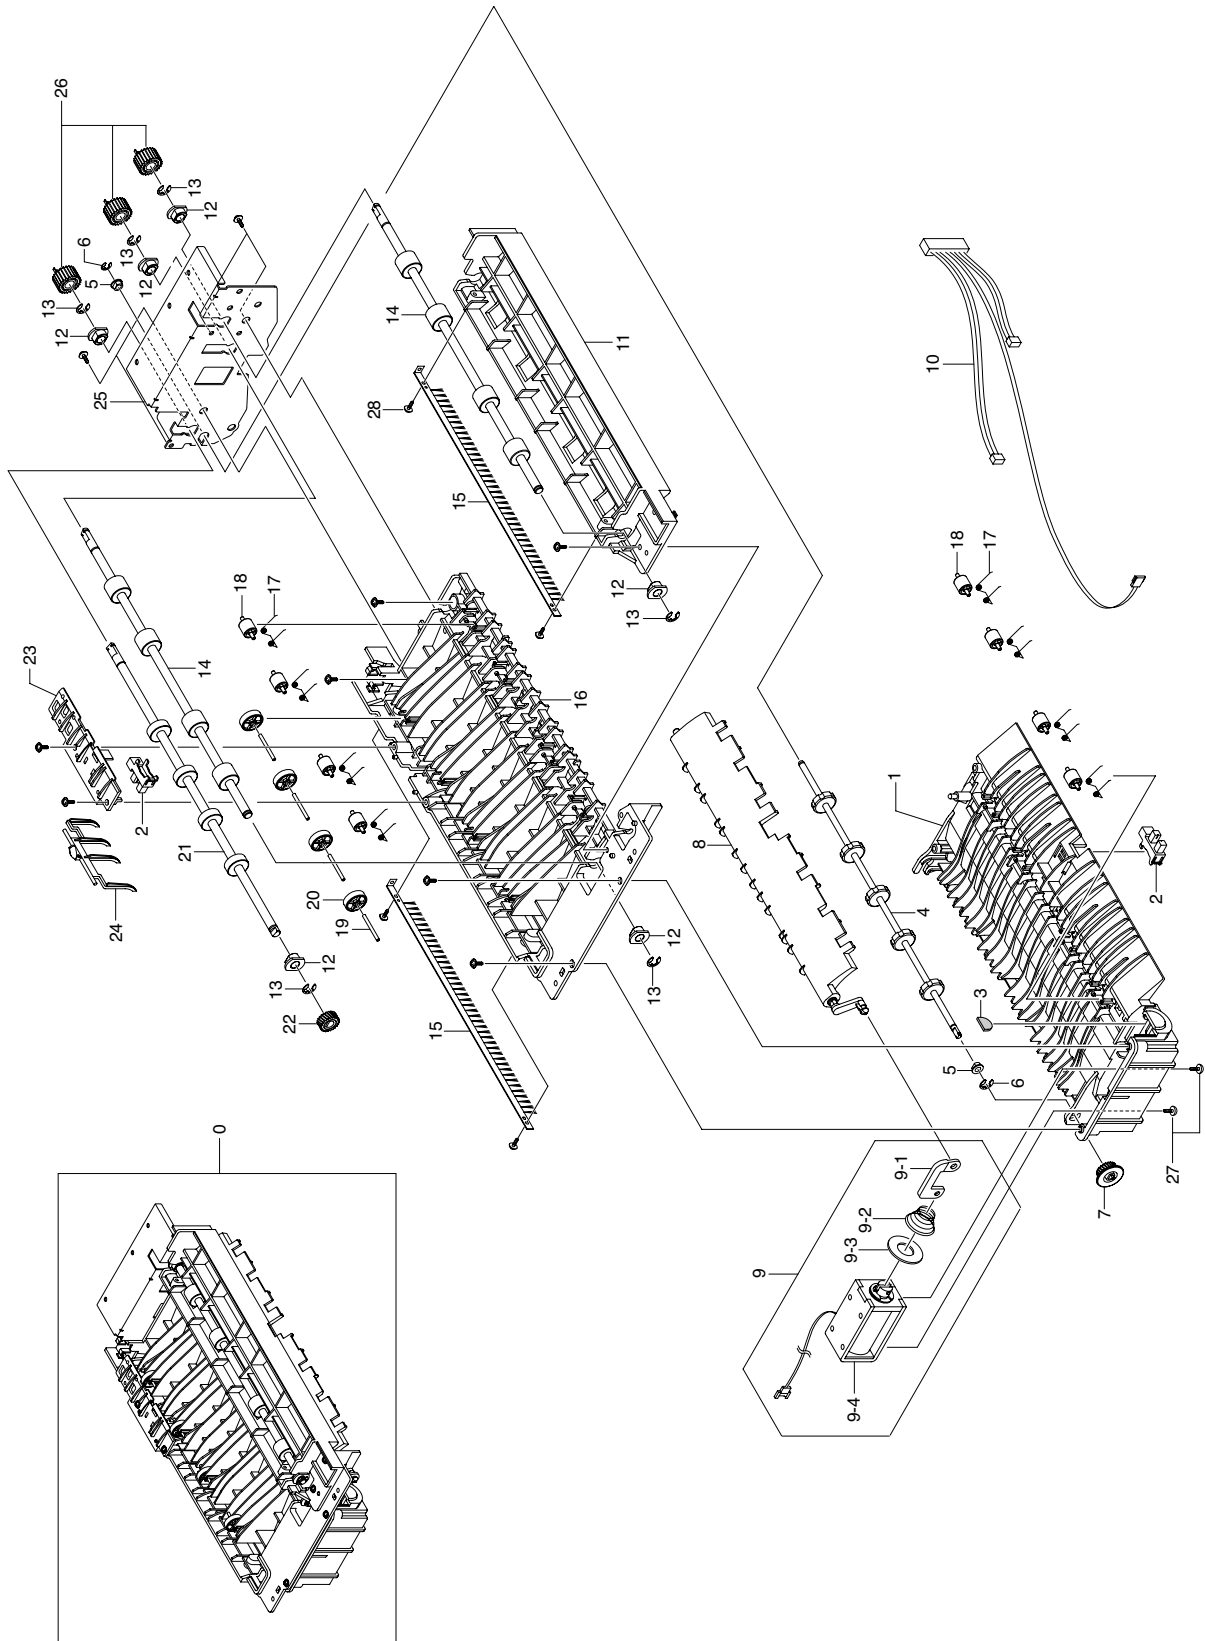


Exit Ass'y Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.7-0	JC96-03529A	ELA HOU-EXIT	Z4547	SA
7.7-1	JC61-01302A	GUIDE-M_EXIT LOWER		SNA
7.7-2	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.7-3	JC63-00821A	ABSORBER-DAMPER S		SNA
7.7-4	JC66-01016A	ROLLER-EXIT_LOWER		SNA
7.7-5	JC61-00424A	BUSH-4	K2867	SA
7.7-6	6044-000159	RING-C	Z4357	SA
7.7-7	JC66-01018A	GEAR-M_EXIT LOWER	Z4711	SA
7.7-8	JC67-00122A	OTHER MECHA-M GATE DP	Z4620	SA
7.7-9	JC96-03749A	ELA HOU-SOLENOID DP	Z4718	SA
7.7-9-1	JC61-01332A	GUIDE RAIL-M LINK GATE		SNA
7.7-9-2	JC61-70915A	SPRING ETC-SOLENOID DP	S8015	SA
7.7-9-3	JC63-00820A	ABSORBER-DAMPER L		SNA
7.7-9-4	JC33-00008C	SOLENOID-DUPLEX JF		SA
7.7-10	JC39-00471A	HARNESSEXIT	Z4679	SA
7.7-11	JC61-01303A	GUIDE-M_EXIT DUPLEX		SNA
7.7-12	JC61-00423A	BUSH-6_D	B0025	SA
7.7-13	6044-000125	RING-E	R0004	SA
7.7-14	JC66-01014A	ROLLER-EXIT DRV		SNA
7.7-15	JC67-00125A	BRUSH-EXIT	Z4715	SA
7.7-16	JC61-01301A	GUIDE-M_EXIT UPPER		SNA
7.7-17	6107-001262	SPRING-TS		SNA
7.7-18	JC66-01013A	ROLLER-M IDLE JF	Z4709	SA
7.7-19	JC70-00064A	IPR-PIN ROLLER EXIT	Z4605	SNA
7.7-20	JC66-01019A	ROLLER-M EXIT DP IDLE	Z4586	SA
7.7-21	JC66-01015A	ROLLER-EXIT UPPER		SNA
7.7-22	JC66-01017A	GEAR-M_EXIT UPPER	Z4710	SA
7.7-23	JC61-01392A	HOLDER-M_ACT OUTBIN		SNA
7.7-24	JC61-01391A	LEG-M LIMIT STACKING	Z4621	SA
7.7-25	JC61-01393A	BRACKET-P-EXIT		SNA
7.7-26	JC66-01012A	GEAR-M_EXIT	Z4708	SA
7.7-27	6003-000221	SCREW-TAPTITE	Z4513	SA
7.7-28	6003-000221	SCREW-TAPTITE	Z4397	SA

7.8 Fuser

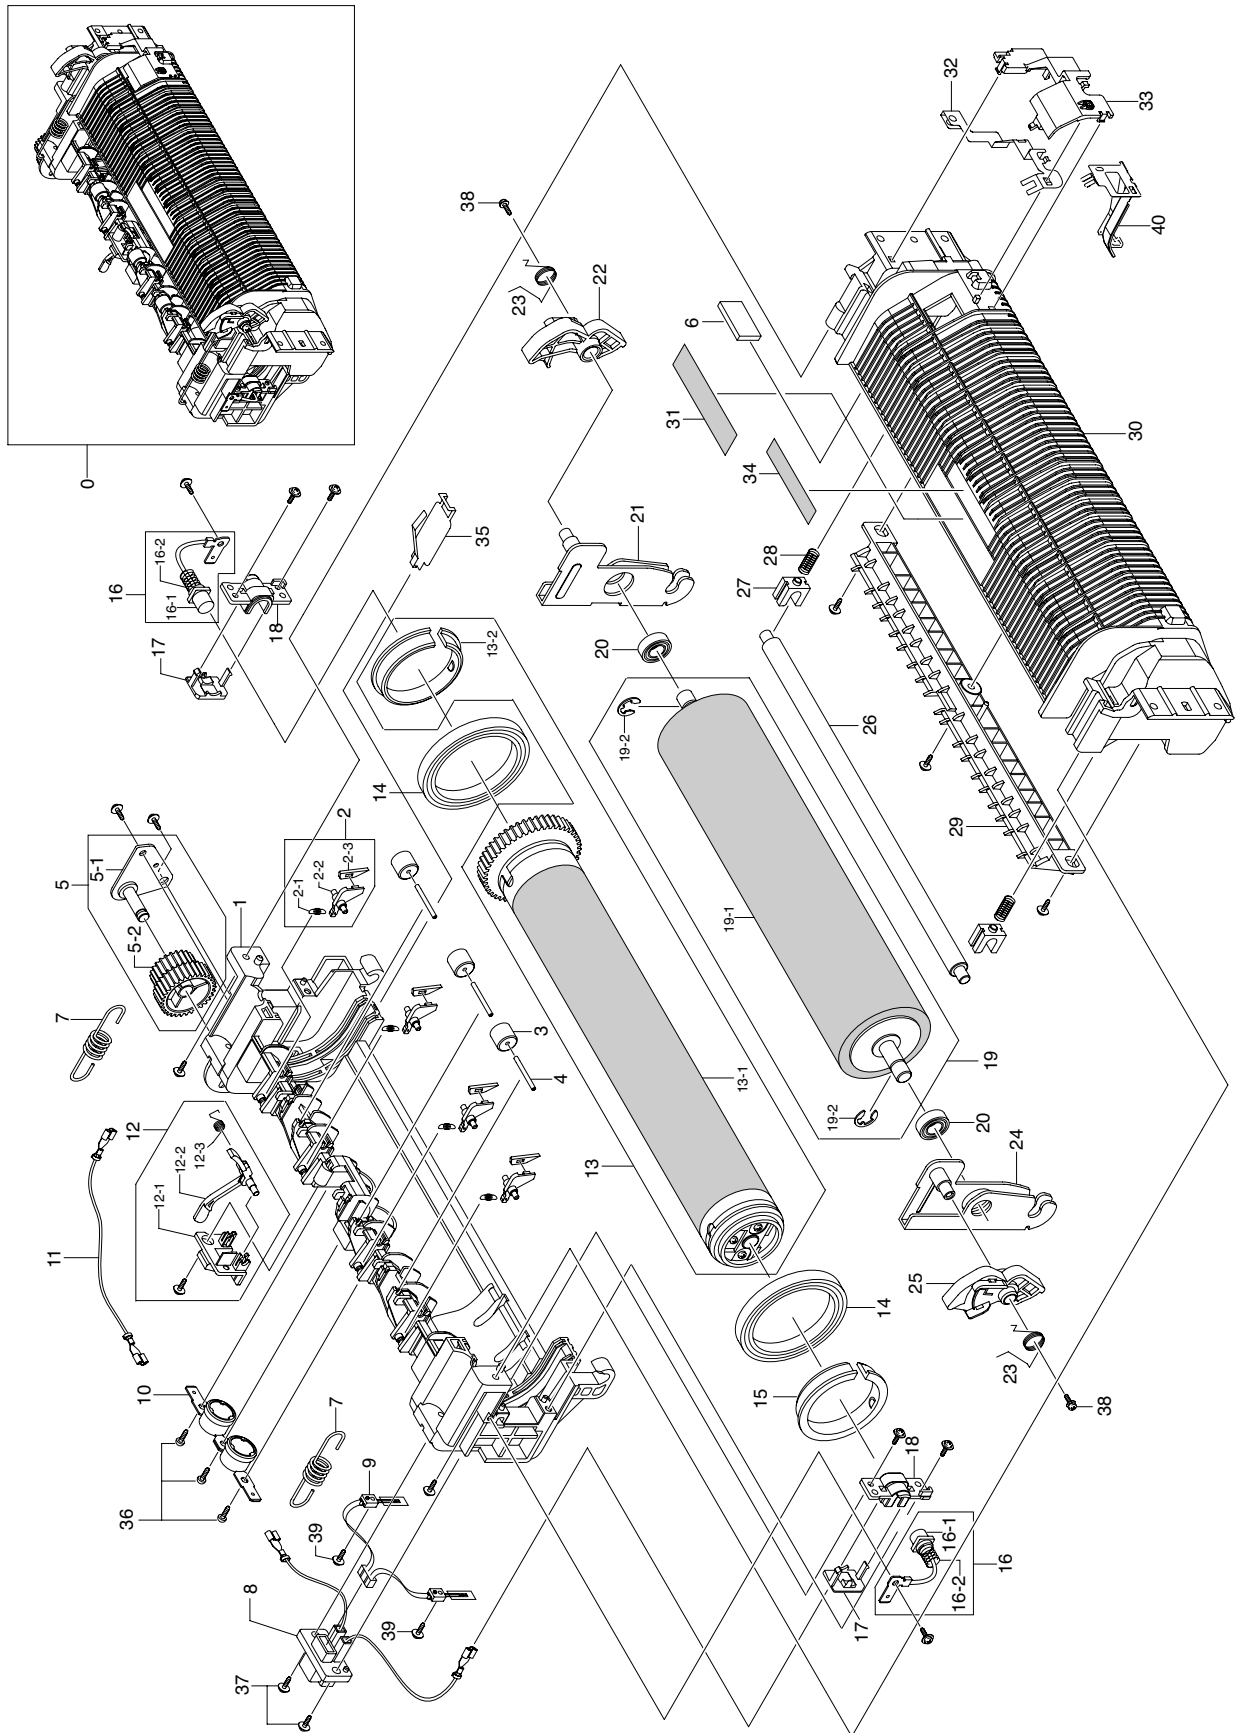

Fuser Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.8-0	JC96-03724A	ELA HOU-FUSER	Z4622	SA
7.8-1	JC63-00756A	COVER-M UPPER FUSER		SNA
7.8-2	JC97-02294A	MEA UNIT-CLAW	Z4623	SA
7.8-2-1	6107-001257	SPRING-ES	Z4544	SA
7.8-2-2	JC61-01383A	HOLDER-M_CLAW		SNA
7.8-2-3	JC67-00121A	OTHER MECHA-FINGER		SNA
7.8-3	JC72-20902A	PEX-ROLLER F/UP(2)	O1106	SA
7.8-4	JC70-00064A	IPR-PIN ROLLER EXIT	Z4605	SNA
7.8-5	JC97-02680A	MEA-BRACKET FUSER	Z4627	SA
7.8-5-1	JC61-01388A	BRACKET-P-FUSER GEAR		SNA
7.8-5-2	JC66-01011A	GEAR-M DRV Z2228	Z4628	SA
7.8-7	6107-001257	SPRING-ES	Z4629	SA
7.8-8	JC39-00618A	HARNESS-FUSER_FU	Z4630	SA
7.8-9	1404-001355	THERMISTOR-NTC ASSY	Z4631	SA
7.8-10	4712-001028	THERMOSTAT	Z4632	SA
7.8-11	JC39-00551A	HARNESS-FUSER_AC	Z4633	SA
7.8-12	JC97-02288A	MEA UNIT-ACTUATOR	Z4634	SA
7.8-12-1	JC61-01385A	HOLDER-ACTUATOR		SNA
7.8-12-2	JC61-01384A	LEG-M ACTUATOR EXIT		SNA
7.8-12-3	JC61-00019A	SPRING ETC-ACT, FEED	Z4635	SA
7.8-13	JC97-02282A	MEA UNIT-ROLLER HEAT	Z4636	SA
7.8-13-1	JC97-02289A	MEA UNIT-IHR		SNA
7.8-13-2	JC61-01439A	BUSH-M H/R JF	Z4637	SA
7.8-14	6601-001341	BEARING-BALL	K2862	SA
7.8-15	JC61-01439A	BUSH-M H/R JF	Z4637	SA
7.8-16	JC97-02272A	MEA UNIT-CARBON BRUSH	Z4638	SA
7.8-16-1	JC61-01331A	PLATE-P-TERMINAL CARBON		SNA
7.8-16-2	6107-000014	SPRING-CS	S0032	SA
7.8-17	JC63-00762A	COVER-M_BRUSH LWR		SNA
7.8-18	JC63-00763A	COVER-M_BRUSH UPR		SNA
7.8-19	JC97-02283A	MEA UNIT-ROLLER PR	Z4641	SA
7.8-19-1	JC66-01036A	ROLLER-PRESSURE JF		SNA
7.8-19-2	6044-000125	RING-E	R0001	SA
7.8-20	6601-001341	BEARING-BALL	B0002	SA
7.8-21	JC61-01386A	BRACKET-P-PR R		SNA
7.8-22	JC66-01033A	LEVER-M JAM R		SNA
7.8-23	6107-001262	SPRING-TS	Z4642	SA
7.8-24	JC61-01387A	BRACKET-P-PR L		SNA
7.8-25	JC66-01034A	LEVER-M JAM L		SNA
7.8-26	JC66-01152A	SHAFT-CLEANING PR		SNA
7.8-27	JC66-10205A	BEARING-PRESSURE R	Z4643	SA
7.8-28	JC61-00013A	SPRING ETC-PAD	Z4478	SNA
7.8-29	JC61-01419A	GUIDE-M_INPUT JF		SNA

Fuser Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.8-30	JC63-00755A	COVER-M LOWER FUSER		SNA
7.8-31	JC68-01581A	LABEL(P)-CAUTION HOT	Z4601	SNA
7.8-32	JC63-00819A	GROUND-P-PR		SNA
7.8-33	JC63-00761A	COVER-M_GROUND		SNA
7.8-34	JC68-01134A	LABEL(P)-BLANK(FUSER)	Z4600	SNA
7.8-35	JC63-00818A	GROUND-P-HR		SNA
7.8-36	6002-000440	SCREW-TAPPING	Z4418	SA
7.8-37	6003-000221	SCREW-TAPTITE	Z4513	SA
7.8-38	6001-000130	SCREW-MACHINE	Z4445	SA
7.8-39	6003-000221	SCREW-TAPTITE		SA
7.8-40	JC63-01175A	GROUND-PR2		SNA

Pick Up Ass'y Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.9-1	JC61-01298A	FRAME-M_BASE PICK UP		SNA
7.9-2	6404-001095	PHOTO-INTERRUPTER	P0013	SA
7.9-3	JC63-00743A	GROUND-P-SHAFT PU		SNA
7.9-4	JC61-01350A	LEG-M_ACT NO PAPER		SNA
7.9-5	JC61-01299A	GUIDE-M_UPPER PICK UP		SNA
7.9-6	JC66-00942A	SHAFT-PICK UP		SNA
7.9-7	JC61-00884A	BUSH-6_D(L)		SNA
7.9-8	6044-000125	RING-E	R0004	SA
7.9-9	JC66-00977A	CLUTCH-P_ONE WAY	Z4805	SA
7.9-10	JC66-00941A	GEAR-M_ONE WAY	Z4804	SA
7.9-11	JC61-01288A	HOLDER-M_IDLE ONE WAY	Z4802	SA
7.9-12	JC97-02259A	MEA UNIT-ROLLER PU	Z4798	SA
7.9-13	JC66-00940A	GEAR-M_IDLE PU	Z4787	SA
7.9-14	JC66-00943A	GEAR-M_PU JOINT	Z4788	SA
7.9-15	JC39-00462A	HARNESS-SCF_EMPTY		SA
7.9-16	JC39-00477A	HARNESS-MOTOR_SW		SA

7.10 Side Duplex

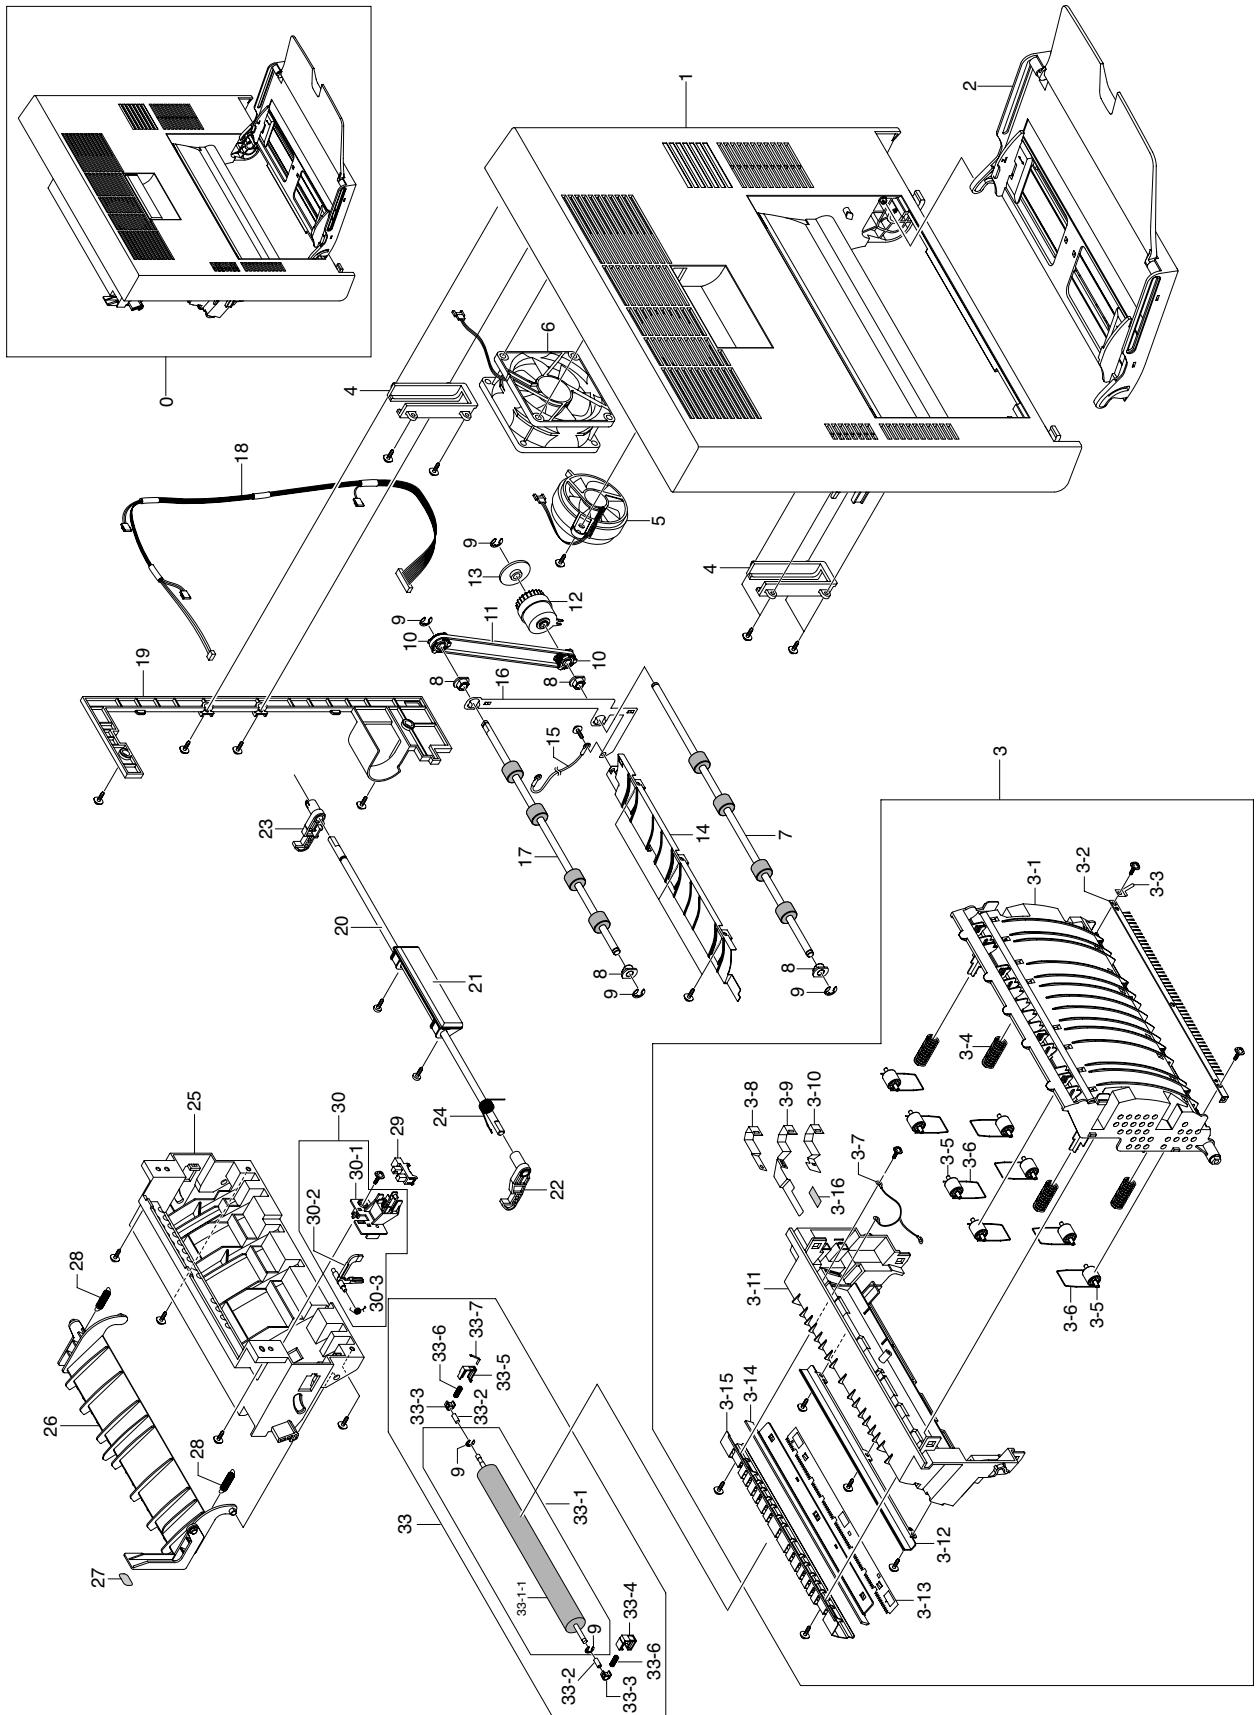

Side Duplex Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.10-0	JC96-03525B	ELA HOU-SIDE DUPLEX	Z4647	SA
7.10-1	JC63-00775B	COVER-SIDE	Z4648	SA
7.10-2	JC97-02264B	MEA UNIT-TRAY	Z4649	SA
7.10-3	JC96-03532A	ELA HOU-DUPLEX	Z4717	SA
7.10-3-1	JC61-01293A	GUIDE-M_DUPLEX		SNA
7.10-3-2	JC67-00125A	BRUSH-EXIT	Z4715	SA
7.10-3-3	JC63-00785A	GROUND-P-BRUSH		SNA
7.10-3-4	JC61-70959A	SPRING ETC-SPRING ETC FEED	F6222	SA
7.10-3-5	JC66-01013A	ROLLER-M IDLE JF	Z4709	SA
7.10-3-6	JC65-00012A	TERMINAL-S_IDLE	Z4745	SA
7.10-3-7	JC39-00187A	CBF HARNESS-ADF ROLLER GND	H1031	SA
7.10-3-8	JC63-00786A	GROUND-P-GND		SNA
7.10-3-9	JC63-00788A	GROUND-P-SAW		SNA
7.10-3-10	JC63-00787A	GROUND-P-TR		SNA
7.10-3-11	JC61-01292A	GUIDE-M_FEED		SNA
7.10-3-12	JC61-01291A	GUIDE-P-EARTH TR		SNA
7.10-3-13	JC70-10232D	IPR-E-PLATE SAW(MCK2)	Z4751	SA
7.10-3-14	JC61-01407A	HOLDER-M_SAW		SNA
7.10-3-15	JC61-01290A	GUIDE-P-TR		SNA
7.10-3-16	0203-001778	TAPE-DOUBLE FACE		SNA
7.10-4	JC61-00175A	BRACKET-COVER DUP		SNA
7.10-5	JC31-00025B	FAN-DC	D2107	SA
7.10-6	JC31-00012C	FAN-DC INVERTER	Z4605	SA
7.10-7	JC66-00970A	ROLLER-DUPLEX READY	Z4747	SA
7.10-8	JC61-00423A	BUSH-6_D	B0025	SA
7.10-9	6044-000125	RING-E	R0004	SA
7.10-10	JC66-00971A	PULLEY-M_DUPLEX	Z4748	SA
7.10-11	6602-001092	BELT-TIMING GEAR	Z4728	SA
7.10-12	JC66-00972A	CLUTCH-2.5K Z24		SA
7.10-13	JC67-00116A	OTHER MECHA-M COLLAR DP		SNA
7.10-14	JC61-01334A	BRACKET-P-DUPLEX		SNA
7.10-15	JB39-00103A	CBF HARNESS-LIU GND	L5004	SA
7.10-16	JC63-00784A	GROUND-P-DUPLEX		SNA
7.10-17	JC66-00969A	ROLLER-DUPLEX	Z4746	SA
7.10-18	JC39-00474A	HARNESS-DUPLEX	Z4731	SA
7.10-19	JC67-00112A	CAP-M_SIDE		SNA
7.10-20	JC66-00935A	SHAFT-HANDLE		SNA
7.10-21	JC64-00205B	HANDLE-SIDE		SNA
7.10-22	JC64-00198A	LOCKER-M_FRONT	Z4738	SA
7.10-23	JC64-00199A	LOCKER-M_REAR	Z4739	SA
7.10-24	JC61-00479A	SPRING ETC-LOCKER TORSION	L6057	SA
7.10-25	JC61-01289A	GUIDE-M_SIDE		SNA
7.10-26	JC61-01308A	GUIDE-M_EXIT		SNA

Side Duplex Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.10-27	JC68-01246B	LABEL(R)-GUIDE_DUPLEX		SNA
7.10-28	JC61-70910A	SPRING ETC-RAIL	Z4244	SA
7.10-29	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.10-30	JC97-02687A	MEA-ACTUATOR_DUPLEX	Z4764	SA
7.10-30-1	JC61-01335A	HOLDER-M_ACTUATOR DP		SA
7.10-30-2	JC61-01336A	LEG-M_ACTUATOR DUPLEX		SA
7.10-30-3	JC61-00019A	SPRING ETC-ACT, FEED	Z4635	SA
7.10-33	JC97-02287A	MEA UNIT-TR	Z4724	SA
7.10-33-1	JC97-02375A	MEA UNIT-TR SUB	Z4763	SA
7.10-33-1-1	JC66-01023A	ROLLER-TRANSFER		SA
7.10-33-1-2	6044-000125	RING-E	R0006	SA
7.10-33-2	JC61-01694A	BUSH-46D		SA
7.10-33-3	JC72-40228A	PMO-BUSH	K3846	SA
7.10-33-4	JC72-00884A	PMO-HOLDER GEAR TR	G0520	SA
7.10-33-5	JC72-00883A	PMO-HOLDER GND TR	K3986	SA
7.10-33-6	JC61-70906A	SPRING ETC-TR_R	Z4733	SA
7.10-33-7	JC61-70203A	SPRING ETC-PLATE TR	Z4732	SA

7.11 MP Unit

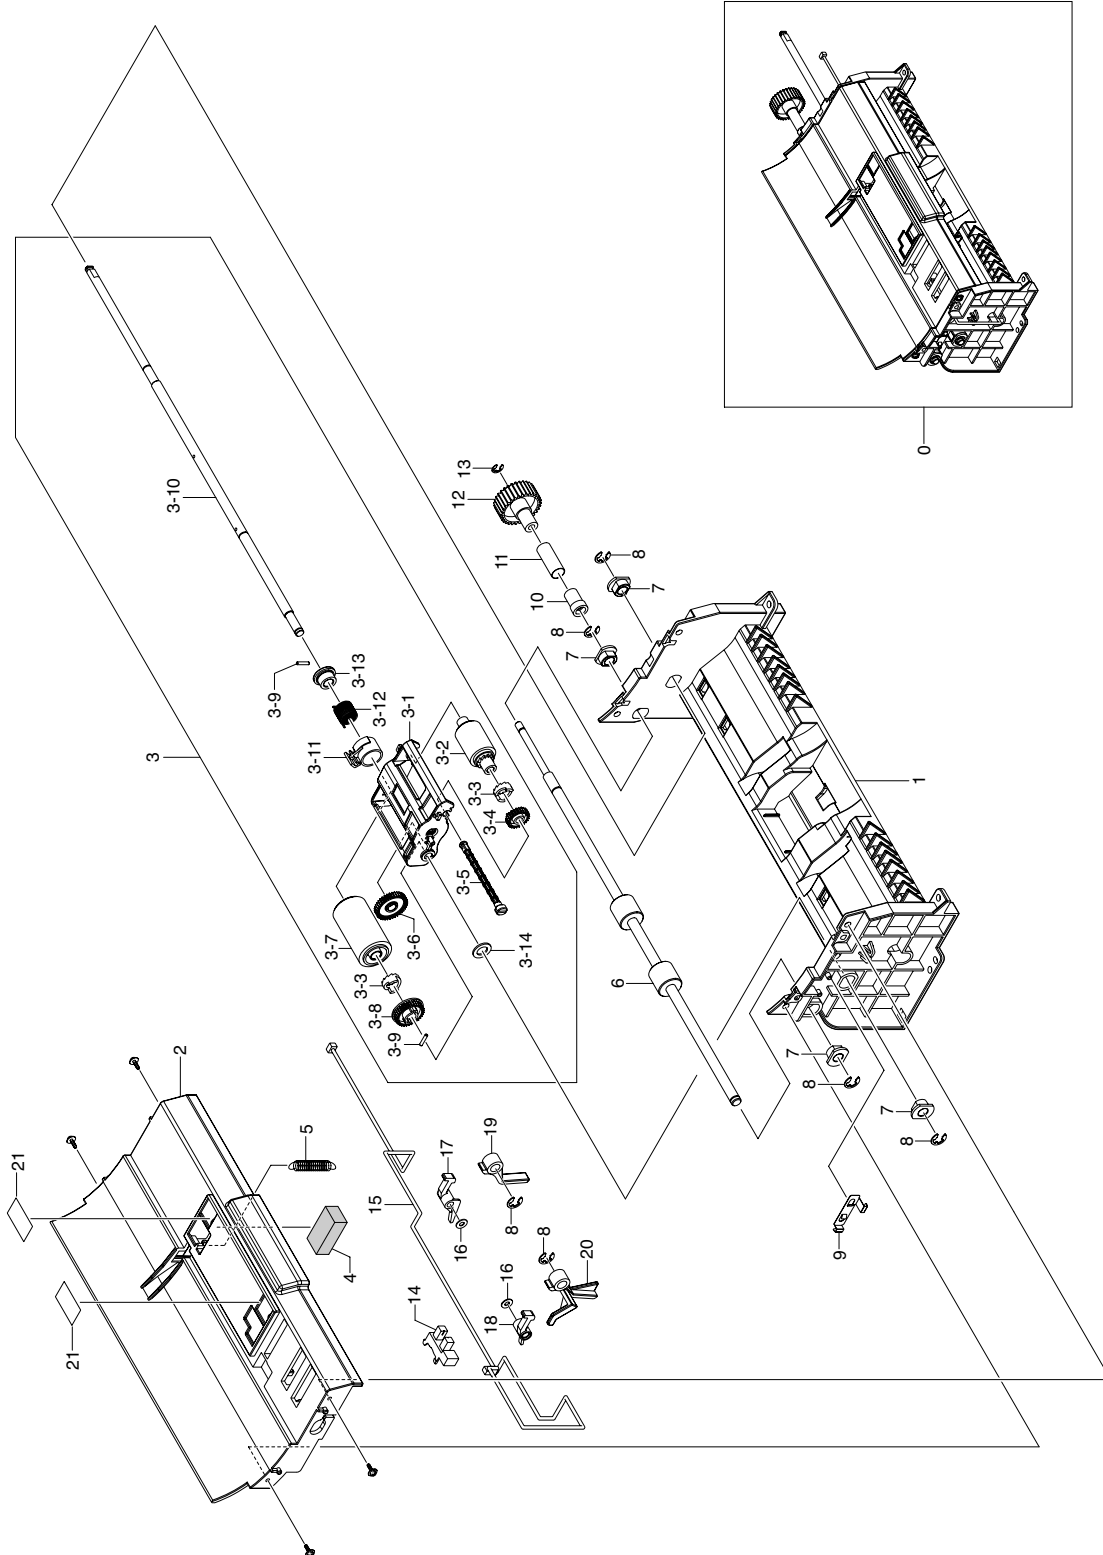


MP Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.11-0	JC96-03557A	ELA HOU-MP	Z4561	SA
7.11-1	JC61-01351A	FRAME-M_MP LOWER		SNA
7.11-2	JC61-01352A	FRAME-M_MP TOP		SNA
7.11-3	JC96-03533A	ELA HOU-MP PICK UP	Z4767	SA
7.11-3-1	JC61-01410A	GUIDE-M_PICKUP DOC		SNA
7.11-3-2	JB75-00300A	MEC-PICK UP ROLLER ASSY	Z4378	SA
7.11-3-3	JB72-00845A	PMO-PICK UP CLUTCH SUB	Z4386	SA
7.11-3-4	JB66-00105A	GEAR-PICK UP 26	Z4385	SA
7.11-3-5	JC72-00744A	PMO-SHAFT PICK UP	Z4384	SA
7.11-3-6	JB66-00102A	GEAR-PICK UP IDEL 38	Z4377	SA
7.11-3-7	JB75-00299A	MEC-ADF ROLLER ASSY	Z4387	SA
7.11-3-8	JB66-00104A	GEAR-ADF IDLE 34	Z4383	SA
7.11-3-9	JB70-00168A	ICT-PIN ADF	I0001	SA
7.11-3-10	JC66-00978A	SHAFT-PICK UP MP		SNA
7.11-3-11	JB72-00821A	PMO-ADF COLAR	Z4380	SA
7.11-3-12	JB61-70904A	SPRING ETC-CLUTCH	Z4381	SA
7.11-3-13	JC61-00750A	BUSH-M-ADF CLUTCH	Z4781	SA
7.11-3-14	6031-000019	WASHER-PLAIN	Z6227	SA
7.11-4	JC72-01375A	SPONGE-DAMPER MP		SNA
7.11-5	6107-001257	SPRING-ES	Z4625	SA
7.11-6	JC66-01026A	ROLLER-MP DRV		SNA
7.11-7	JC61-00423A	BUSH-6_D	B0025	SA
7.11-8	6044-000125	RING-E	R0004	SA
7.11-9	JC63-00744A	GROUND-P-MP		SNA
7.11-10	JG72-40732A	PMO-BUSHING HOLDER		SNA
7.11-11	JG70-40534A	ICT-SPRING CLUTCH		SA
7.11-12	JC66-00936A	GEAR-M_MP FEED		SA
7.11-13	6044-000159	RING-C	Z4357	SA
7.11-14	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.11-15	JC39-00473A	CBF HARNESS-LIMIT_EMT		SA
7.11-16	6031-000019	WASHER-PLAIN		SNA
7.11-17	JC66-00958B	LATCH-M_ARM REAR		SNA
7.11-18	JC66-00958A	LATCH-M_ARM FRT		SNA
7.11-19	JC61-01307B	STOPPER-M_PAPER REAR		SNA
7.11-20	JC61-01307A	STOPPER-M_PAPER FRT		SNA
7.11-21	JB63-00058A	SHEET-FILM ASF		SNA

7.12 MP Tray



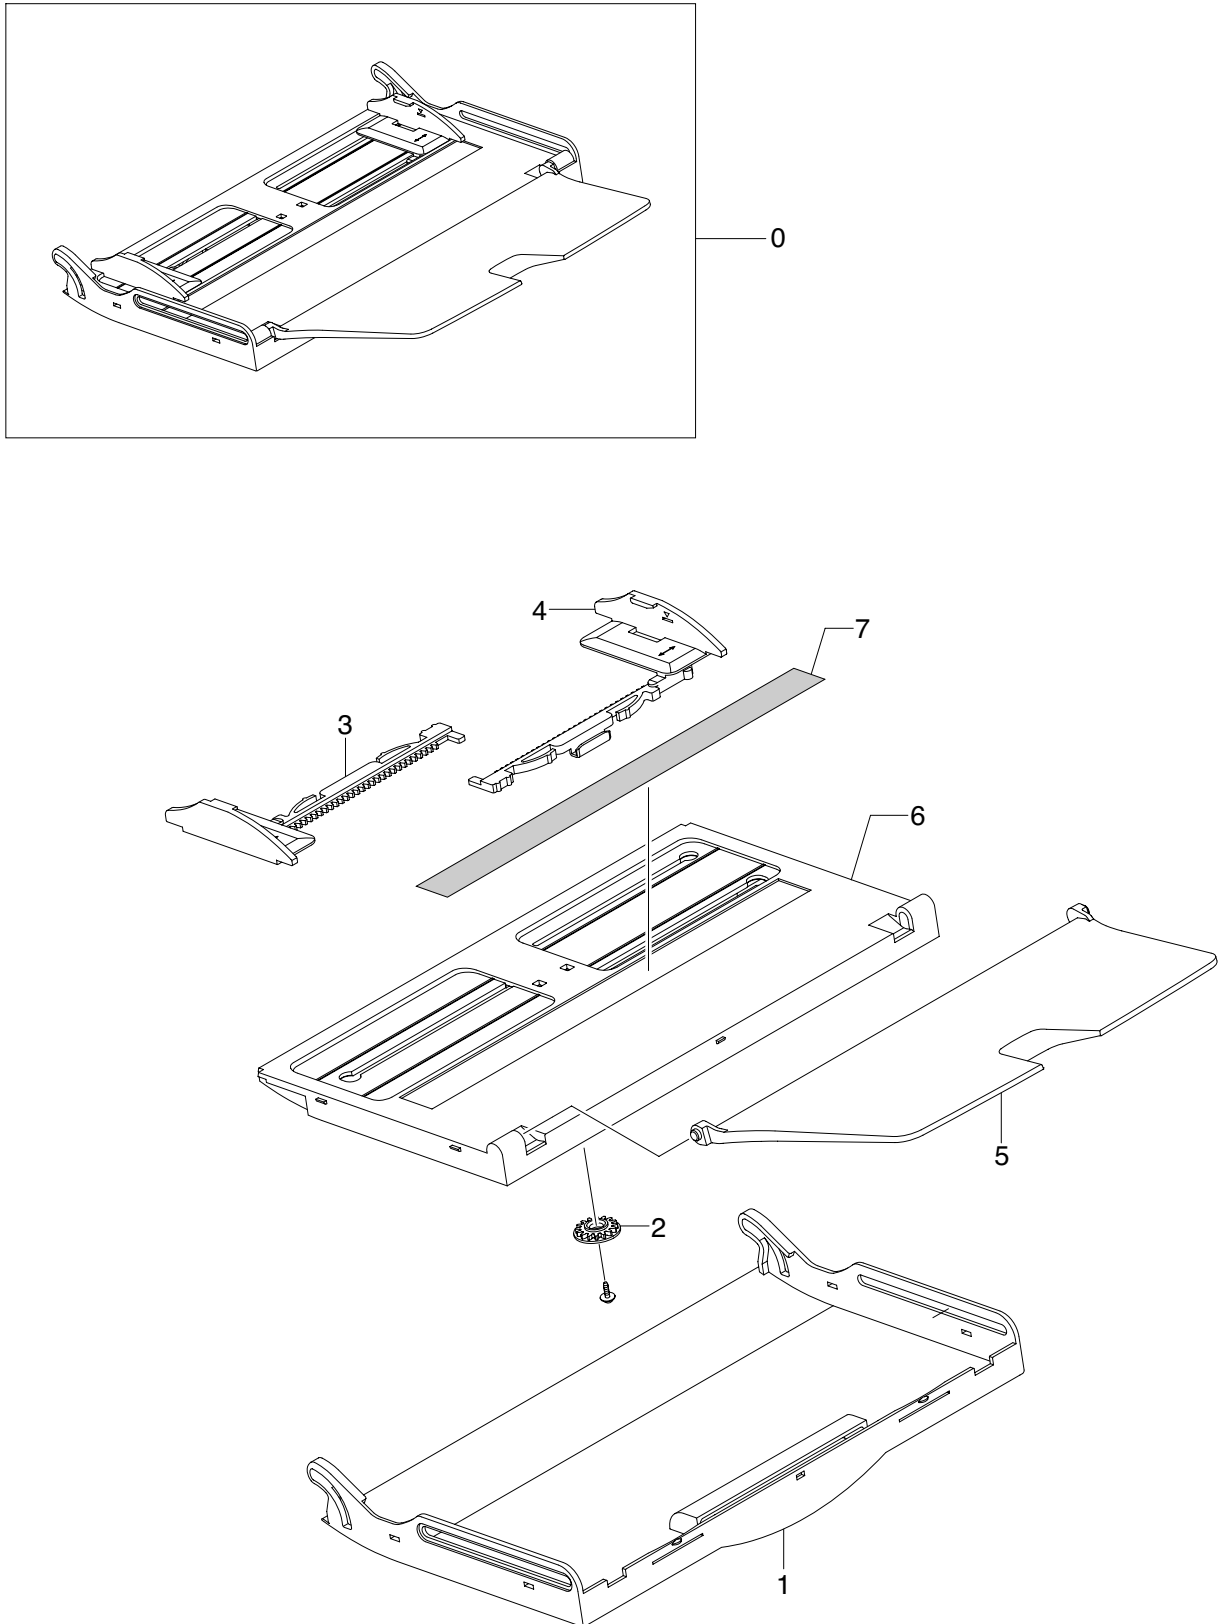


MP Tray Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.12-0	JC97-02264B	MEA UNIT-TRAY	Z4649	SA
7.12-1	JC63-00746B	TRAY-COVER LOWER		SNA
7.12-2	JG66-40003A	GEAR-PINION	O1127	SA
7.12-3	JC72-01005B	PMO-SIDE GUIDE MP(L)	G2299	SA
7.12-4	JC72-01006B	PMO-SIDE GUIDE MP(R)	G2301	SA
7.12-5	JC63-00447B	TRAY-M_EXIT_MP_XRX	Z4736	SA
7.12-6	JC63-00745A	TRAY-M_COVER TOP		SNA
7.12-7	JC68-01622B	LABEL-INSTALLATION		SNA

7.13 OPE(SCX-6345N)

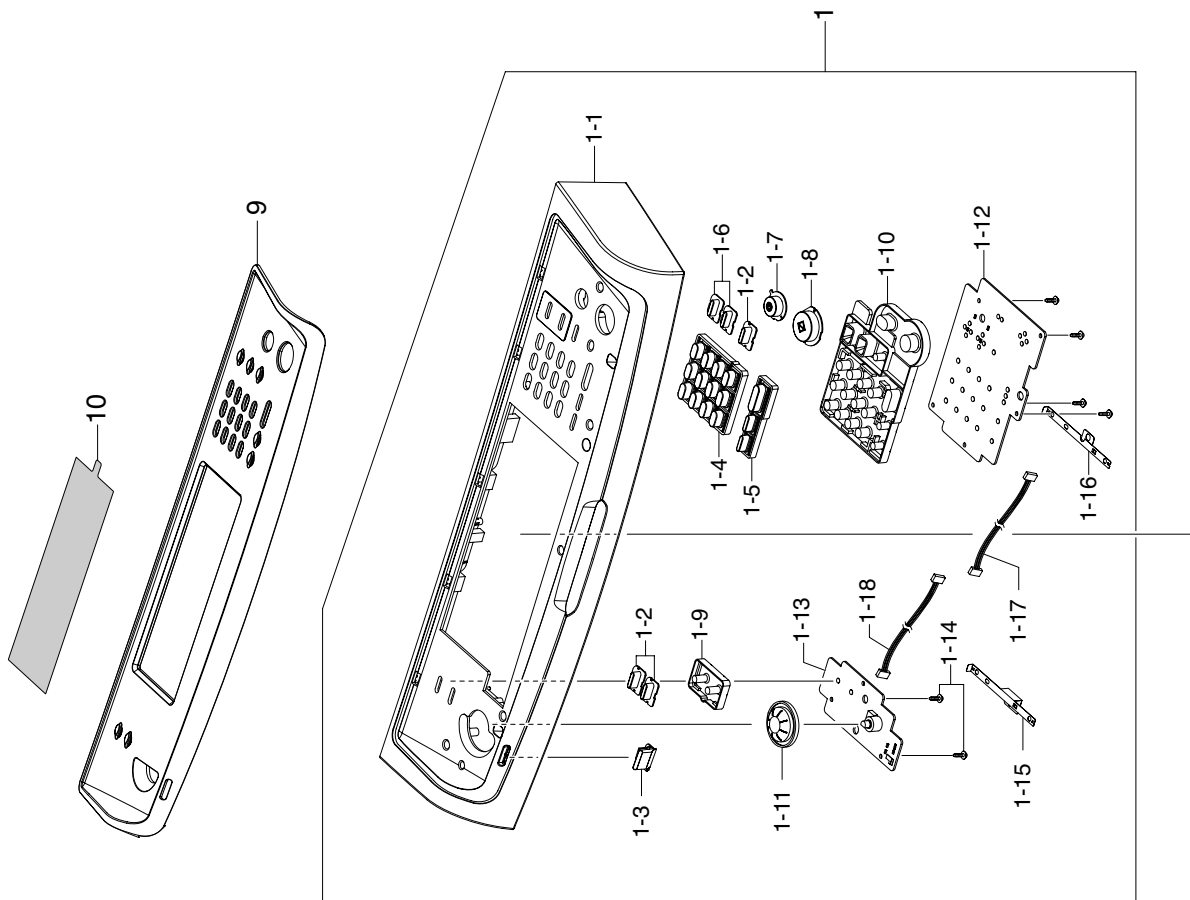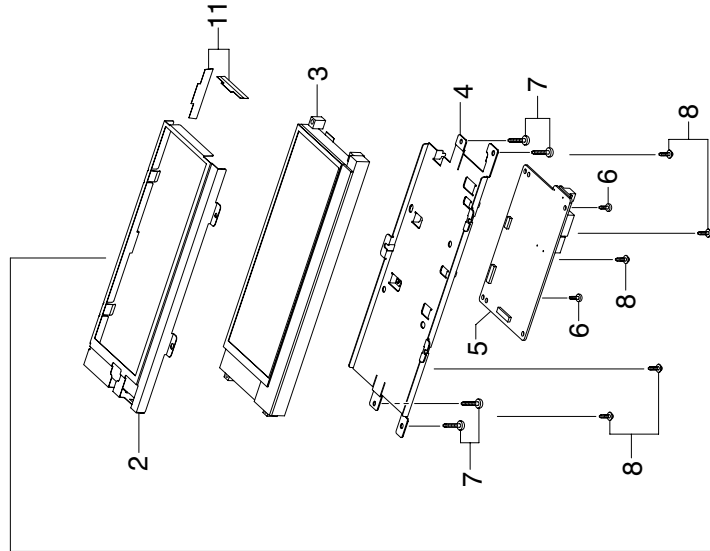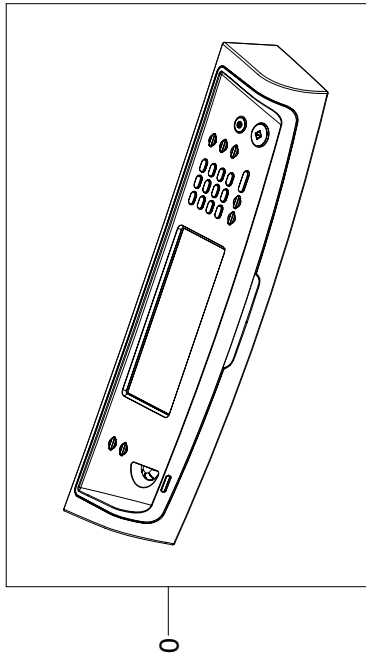


OPE(SCX-6345N) Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.13-0	JC96-03546C	ELA HOU-OPE		SNA
7.13-1	JC96-03753C	ELA HOU-OPE COVER	Z4720	SA
7.13-1-1	JC63-01212A	COVER-OPE		SNA
7.13-1-2	JC64-00287A	KEY-JOB_STATUS	Z4740	SA
7.13-1-3	JC67-00209A	LENS-STATUS		SNA
7.13-1-4	JC64-00239A	KEY-M_TEL	Z6206	SNA
7.13-1-5	JC64-00288A	KEY-HOOK	Z4741	SA
7.13-1-6	JC64-00244A	KEY-M_BLACK		SNA
7.13-1-7	JC64-00289A	KEY-STOP	Z4742	SA
7.13-1-8	JC64-00290A	KEY-START	Z4743	SA
7.13-1-9	JC73-00252A	RUBBER-JOB_STATUS	Z4752	SA
7.13-1-10	JC73-00253A	RUBBER-JOB_START	Z4753	SA
7.13-1-11	JC64-00291A	KEY-CONTRAST	Z4744	SA
7.13-1-12	JC92-01693B	PBA-OPE_KEY	Z4754	SA
7.13-1-13	JC92-01694B	PBA-OPE_KEY_SUB	Z4755	SA
7.13-1-14	6003-000221	SCREW-TAPTITE	Z4397	SA
7.13-1-15	JC63-00814A	GROUND-P-LCD L		SNA
7.13-1-16	JC63-00813A	GROUND-P-LCD R		SNA
7.13-1-17	JC39-00552A	CBF HARNESS-OPE_KEY	Z4651	SA
7.13-1-18	JC39-00553A	CBF HARNESS-OPE_SUB	Z4650	SA
7.13-2	JC61-01635A	PLATE-P_LCD	Z4653	SA
7.13-3	JC07-00010A	LCD-DISPLAY+TOUCH	Z4654	SA
7.13-4	JC61-01329A	PLATE-P-OPE	Z4655	SA
7.13-5	JC92-01692B	PBA-OPE_MAIN	Z4716	SA
7.13-6	6003-000221	SCREW-TAPTITE	Z4513	SA
7.13-7	6003-000221	SCREW-TAPTITE	Z4645	SA
7.13-8	6003-000221	SCREW-TAPTITE	Z4397	SA
7.13-9	JC63-01211A	COVER-PANEL_FRONT		SNA
7.13-10	JC63-01043A	SHEET-LCD	Z4652	SA
7.13-11	JC63-00407A	SHEET-HOLDER PAD R2	Z4578	SNA

7.14 Platen Ass'y

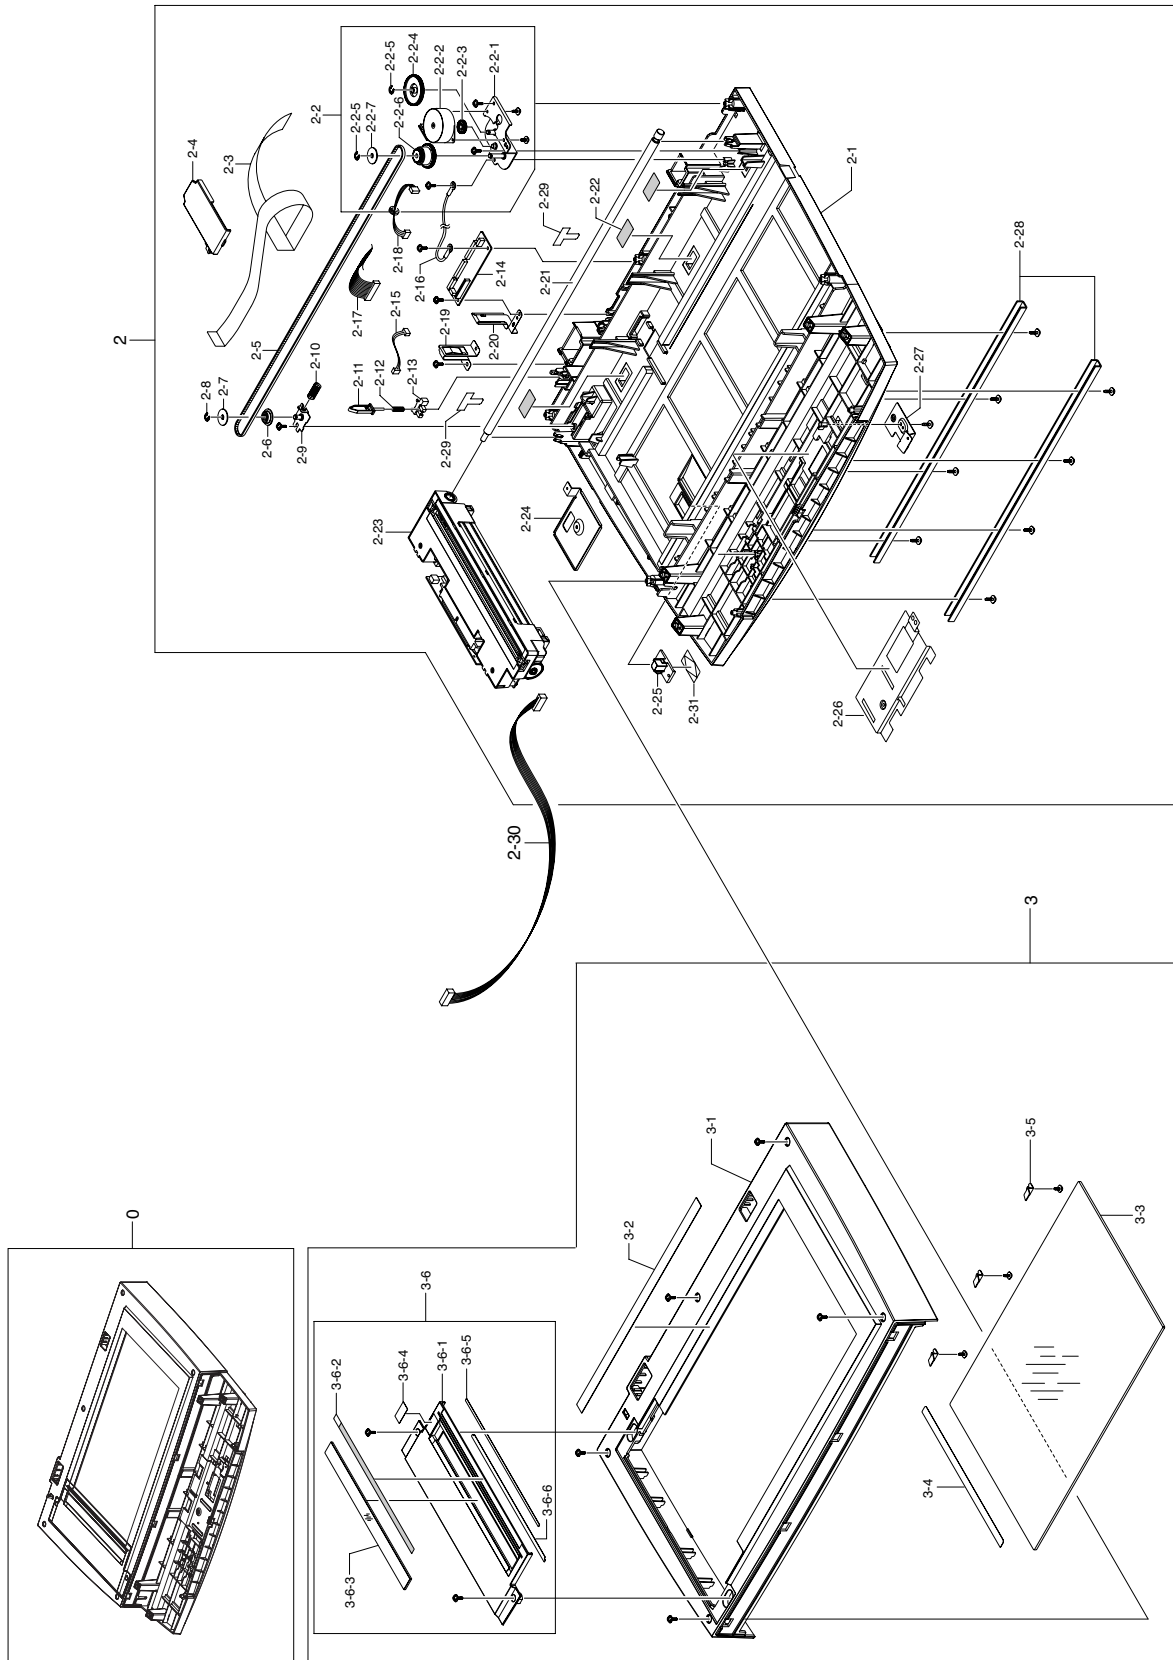

Platen Ass'y Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.14-0	JC96-03550B	ELA HOU-PLATEN	Z4656	SA
7.14-2	JC96-03548B	ELA HOU-SCAN LOWER	Z4657	SA
7.14-2-1	JC63-00767B	COVER-SCAN LOWER		SNA
7.14-2-2	JC96-03547A	ELA HOU-SCAN MOTOR	Z4768	SA
7.14-2-2-1	JC61-01433A	BRACKET-P-MOTOR PLAT		SNA
7.14-2-2-2	JC31-00048B	MOTOR STEP		SA
7.14-2-2-3	JB66-00083A	GEAR-IDLE	Z4330	SA
7.14-2-2-4	JC66-00530A	GEAR-REDUCTION73/37	G0412	SA
7.14-2-2-5	6044-000125	RING-E	R0004	SA
7.14-2-2-6	JC66-00531A	GEAR-TIMING	G0434	SA
7.14-2-2-7	JB72-00764A	PMO-HOLDER BELT	Z4329	SA
7.14-2-3	JC39-00556A	CBF SIGNAL-CCD		SA
7.14-2-4	JC63-00766B	COVER-CCD CABLE		SNA
7.14-2-5	6602-001092	BELT-TIMING GEAR	Z6016	SA
7.14-2-6	JB72-00763A	PMO-PULLEY	Z4334	SA
7.14-2-7	JB72-00764A	PMO-HOLDER BELT	Z4329	SA
7.14-2-8	6044-000125	RING-E	R0004	SA
7.14-2-9	JC61-01365A	BRACKET-P-PULLEY		SNA
7.14-2-10	6107-000014	SPRING-CS	S0032	SA
7.14-2-11	JC72-00755A	PMO-LEVER SENSOR	L4074	SA
7.14-2-12	JB61-70939A	SPRING ETC-EXIT		SNA
7.14-2-13	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.14-2-14	JC92-01695A	PBA SUB-SCAN_IF	Z4766	SA
7.14-2-15	JC39-00463A	HARNES-GATE_NEAR		SA
7.14-2-16	JB39-00103A	CBF HARNES-LIU GND	L5004	SA
7.14-2-17	JC39-00459A	HARNES-SCAN		SA
7.14-2-18	JC39-00241A	CBF HARNES-MOTOR	M2053	SA
7.14-2-19	JC63-00812A	GROUND-P-SCAN LOWER		SNA
7.14-2-20	JC63-00811A	GROUND-P-SCAN IF		SNA
7.14-2-21	JC66-00981A	SHAFT-CCD		SNA
7.14-2-22	JC63-00459A	SHEET-SCAN LOWER		SNA
7.14-2-23	JC96-03982A	ELA HOU-CCDM	Z4771	SA
7.14-2-24	JC61-01318A	PLATE-P-SCAN LOWER		SNA
7.14-2-25	JC61-01366A	HOLDER-M_CCD		SNA
7.14-2-27	JC61-01776A	PLATE-OPE_GROUND		SNA
7.14-2-28	JC70-00239A	IPR-CHANNEL BASE FRAME	B0085	SA
7.14-2-29	6502-000132	CABLE CLAMP	Z4538	SNA
7.14-2-30	JC39-00550A	CBF HARNES-OPE		SA
7.14-2-31	JC68-00723A	LABEL(R)-LOCK INDICATOR		SNA
7.14-3	JC96-03536B	ELA HOU-SCAN UPPER		SNA
7.14-3-1	JC63-00768B	COVER-SCAN UPPER		SNA
7.14-3-2	JC63-00748B	SHEET-REGI		SNA
7.14-3-3	JC01-00004A	GLASS-SCAN HEATING		SA

Platen Ass'y Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.14-3-4	JC68-00749A	LABEL(P)-SHEET SHADING(B)		SNA
7.14-3-5	JB70-00148A	IPR-HOLDER GLASS	Z4327	SA
7.14-3-6	JC97-02267B	MEA UNIT-DUMMY UPPER	Z4658	SA
7.14-3-6-1	JC63-00758B	COVER-ADF GLASS		SNA
7.14-3-6-2	JC68-01622B	LABEL-INSTALLATION		SNA
7.14-3-6-3	JC74-00019A	MCT-GLASS ADF	G1009	SA
7.14-3-6-4	JC68-01622B	LABEL-INSTALLATION		SNA
7.14-3-6-5	JC63-00074A	SHEET-DUMMY UPPER	D2132	SA
7.14-3-6-6	JC63-01152A	SHEET-ADF GLASS		SNA

7.15 DADF Sub

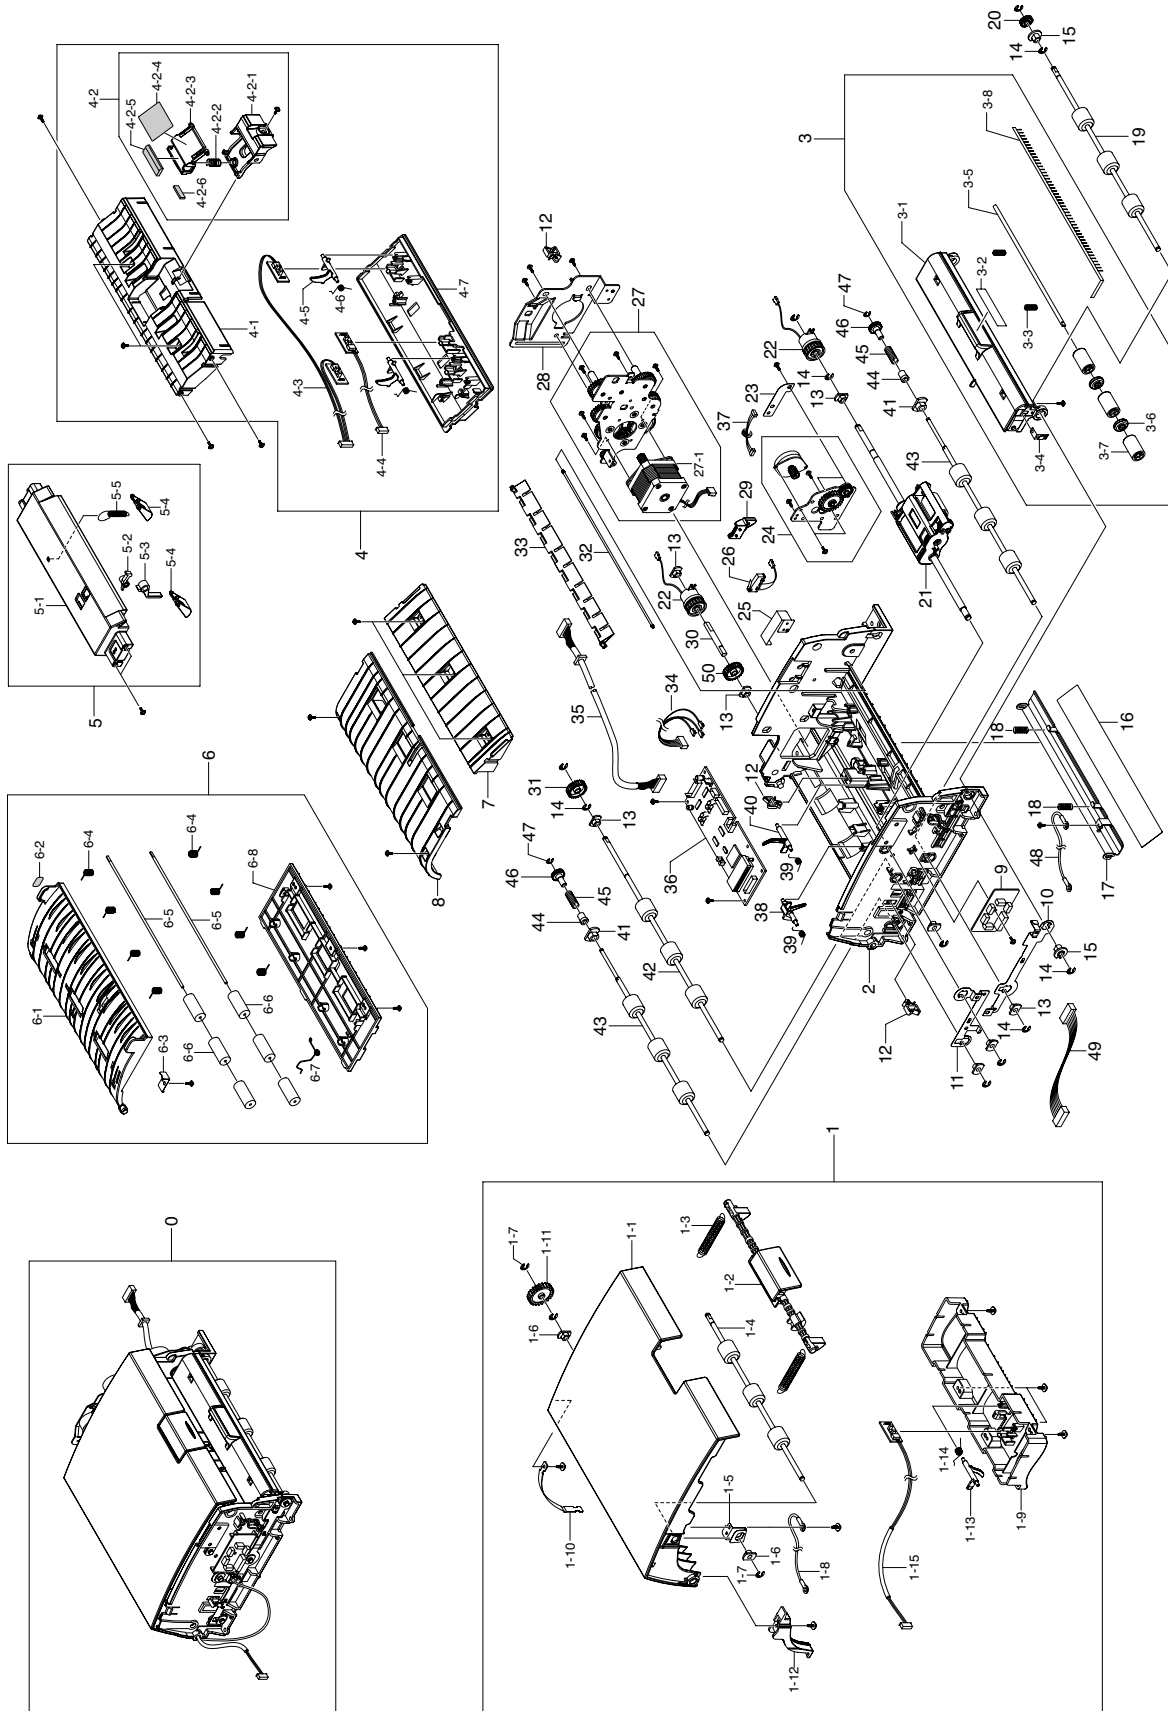

DADF Sub Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.15-0	JC96-03579B	ELA HOU-DADF SUB	Z4659	SA
7.15-1	JC97-01844C	MEA UNIT-COVER OPEN	Z4772	SA
7.15-1-1	JC63-00195B	COVER-OPEN	Z4660	SA
7.15-1-2	JC72-01256B	PMO-LEVER OPEN		SNA
7.15-1-3	JC61-00483A	SPRING ETC-KNOCKUP,MP	Z4206	SA
7.15-1-4	JC66-00587A	ROLLER-REGI	K4229	SNA
7.15-1-5	JC63-00315A	GROUND-P DUPLEX		SNA
7.15-1-6	JC61-00423A	BUSH-6_D	B0025	SA
7.15-1-7	6044-000125	RING-E	R0004	SA
7.15-1-8	JB39-00103A	CBF HARNESS-LIU GND	L5004	SA
7.15-1-9	JC63-00197B	COVER-SENSOR	Z4661	SA
7.15-1-10	JC72-41396B	PMO-STOPPER EXIT	Z4794	SA
7.15-1-11	JC66-00565B	GEAR-DADF24(A)	C9030	SA
7.15-1-12	JC63-00408B	COVER-HARNESS		SNA
7.15-1-13	JC72-01261A	PMO-ACTUATOR REGI		SNA
7.15-1-14	JB61-00076A	SPRING ETC-TORSION DOC (CC2-F)	O1013	SA
7.15-1-15	JC92-01561A	PBA SUB-REGI	H5015	SA
7.15-2	JC61-01300A	GUIDE-M_SCAN		SNA
7.15-3	JC97-02305B	MEA UNIT-COVER EXIT		SNA
7.15-3-1	JC63-00196B	COVER-EXIT	Z4662	SA
7.15-3-2	JC68-01244A	LABEL(R)-COVER_EXIT		SNA
7.15-3-3	JC61-00548A	SPRING ETC-WHITE BAR	Z4294	SA
7.15-3-4	JC63-00203A	GROUND-P-EXIT COVER		SNA
7.15-3-5	JC66-00661A	SHAFT-EXIT IDLE	F6100	SA
7.15-3-6	JC66-00980A	ROLLER-M_DECURL		SNA
7.15-3-7	JC72-00906A	PMO-ROLLER IDLE SCAN	K4066	SA
7.15-3-8	JC67-00196A	BRUSH-ANTISTATIC SCAN	Z4791	SA
7.15-4	JC97-01847A	MEA UNIT-GUIDE_PICK_UP	P2068	SA
7.15-4-1	JC61-00733A	GUIDE-M_PICK_UP_UPPER		SNA
7.15-4-2	JC97-01846A	MEA UNIT-HOLDER ADF RUBBER	R1043	SA
7.15-4-2-1	JC61-00745A	HOLDER-M-ADF RUBBER LOWER		SNA
7.15-4-2-2	JC61-00013A	SPRING ETC-PAD	S0028	SA
7.15-4-2-3	JC61-00744A	HOLDER-M-ADF RUBBER UPPER		SNA
7.15-4-2-4	JC63-00186A	SHEET-GUIDE ADF	Z4803	SA
7.15-4-2-5	JB73-00052A	RMO-ADF RUBBER	Z4373	SA
7.15-4-2-6	JC73-00079A	RPR-SEAL SIDE	Z4563	SA
7.15-4-3	JC96-03903A	ELA HOU-SUB_DOC_WIDTH	Z4797	SA
7.15-4-4	JC92-01564A	PBA SUB-EXIT_OPEN	M0330	SA
7.15-4-5	JC72-01248A	PMO-ACTUATOR DOC	Z4792	SA
7.15-4-6	JB61-00076A	SPRING ETC-TORSION DOC (CC2-F)	O1013	SA
7.15-4-7	JC61-00732A	GUIDE-M-PICK_UP_LOWER		SNA
7.15-5	JC97-02279A	MEA UNIT-SUPPORT PU	Z4774	SA
7.15-5-1	JC63-00783A	COVER-M_SUPPORT_PU		SNA

DADF Sub Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.15-5-2	JC66-00958A	LATCH-M_ARM FRT		SNA
7.15-5-3	JC61-01307B	STOPPER-M_PAPER REAR		SNA
7.15-5-4	JC61-00788A	GUIDE-M_DOC SENSOR		SNA
7.15-5-5	JC61-00482A	SPRING ETC-PICKUP	P2913	SA
7.15-6	JC97-01843A	MEA UNIT-GUIDE DUPLEX	D3026	SA
7.15-6-1	JC61-00734A	GUIDE-M_DUPLEX_UPPER		SNA
7.15-6-2	JC68-01246B	LABEL(R)-GUIDE_DUPLEX		SNA
7.15-6-3	JC63-00834A	GROUND-P-DUPLEX IDLE		SNA
7.15-6-4	JC61-01563A	SPRING ETC-DUP IDLE	Z4783	SA
7.15-6-5	JC66-01038A	SHAFT-PINCH DUP IDLE		SNA
7.15-6-6	JG72-40663A	PMO-ROLL PINCH	Z4350	SA
7.15-6-7	JC63-00428A	GROUND-S_REGI	Z4785	SA
7.15-6-8	JC61-00736A	GUIDE-M_DUPLEX_MID		SNA
7.15-7	JC61-00737A	GUIDE-M_DUPLEX_INNER	D3024	SA
7.15-8	JC61-00735A	GUIDE-M_DUPLEX_LOWER	D3025	SA
7.15-9	JC92-01725A	PBA SUB-SENSOR_IF	Z4796	SA
7.15-10	JC63-00808A	GROUND-P-EXIT ROLLER		SNA
7.15-11	JC63-00807A	GROUND-P-SCAN ROLLER		SNA
7.15-12	6502-000132	CABLE CLAMP	C0069	SA
7.15-13	JC61-00423A	BUSH-6_D	B0025	SA
7.15-14	6044-000125	RING-E	R0004	SA
7.15-15	JC61-00884A	BUSH-6_D(L)		SNA
7.15-16	JC63-00810A	SHEET-WHITE BAR		SNA
7.15-17	JC61-01364A	BRACKET-P-WHITE BAR		SNA
7.15-18	JC61-00548A	SPRING ETC-WHITE BAR	Z4294	SA
7.15-19	JC66-00588A	ROLLER-EXIT	R1083	SA
7.15-20	JC66-00571A	GEAR-DADF_EXIT31		SA
7.15-21	JC97-02277A	MEA UNIT-PICK UP_JF	Z4663	SA
7.15-22	JC66-00972A	CLUTCH-2.5K Z24		SA
7.15-23	JC63-00809A	GROUND-P-DUPLEX MOTOR		SNA
7.15-24	JC96-03556A	ELA HOU-DUPLEX MOTOR	Z4770	SA
7.15-25	JC70-00218A	IPR-GUARD C/O SW	K3339	SA
7.15-26	JC39-00332A	CBF HARNESS-COVER_OPEN	Z2104	SA
7.15-27	JC96-03555A	ELA HOU-DADF MOTOR	Z4769	SA
7.15-27-1	JC31-00044A	MOTOR STEP-DADF		SA
7.15-28	JC63-00307A	COVER-P GEAR	P5106	SA
7.15-29	JC61-01437A	HOLDER-M_SWITCH		SNA
7.15-30	JC66-00662A	SHAFT-REGI		SA
7.15-31	JC66-00565B	GEAR-DADF24(A)	C9030	SA
7.15-32	JC66-00683A	SHAFT-GATE_DUPLEX		SNA
7.15-33	JC72-01255A	PMO-GATE DUPLEX	Z4793	SA
7.15-34	JC39-00612A	HARNESS-DADF_CLUT	Z4779	SA
7.15-35	JC39-00557A	HARNESS-SCAN_IF	Z4778	SA

DADF Sub Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.15-36	JC92-01691A	PBA SUB-DADF	Z4795	SA
7.15-37	JC39-00241A	CBF HARNESS-MOTOR	M2053	SA
7.15-38	JC72-01249A	PMO-ACTUATOR SCAN	S0055	SA
7.15-39	JB61-00076A	SPRING ETC-TORSION DOC (CC2-F)	O1013	SA
7.15-40	JC72-01263A	PMO-ACTUATOR DUPLEX	S0054	SA
7.15-41	JC61-00720A	BUSH-10_D		SNA
7.15-42	JC66-01037A	ROLLER-DUPLEX SCAN		SNA
7.15-43	JC66-00585A	ROLLER-SCAN	K3455	SA
7.15-44	JG72-40732A	PMO-BUSHING HOLDER		SNA
7.15-45	JB61-70904A	SPRING ETC-CLUTCH	C9078	SA
7.15-46	JC66-00570A	GEAR-DADF_SCAN31	Z4786	SA
7.15-49	JC39-00344A	CBF HARNESS-SENSOR_IF	Z4664	SA
7.15-47	6044-000159	RING-C	Z4357	SA
7.15-48	JC39-00509A	CBF HARNESS-GND ZENER		SA
7.15-50	JC66-00565B	GEAR-DADF24(A)		SA

7.16 DADF Ass'y

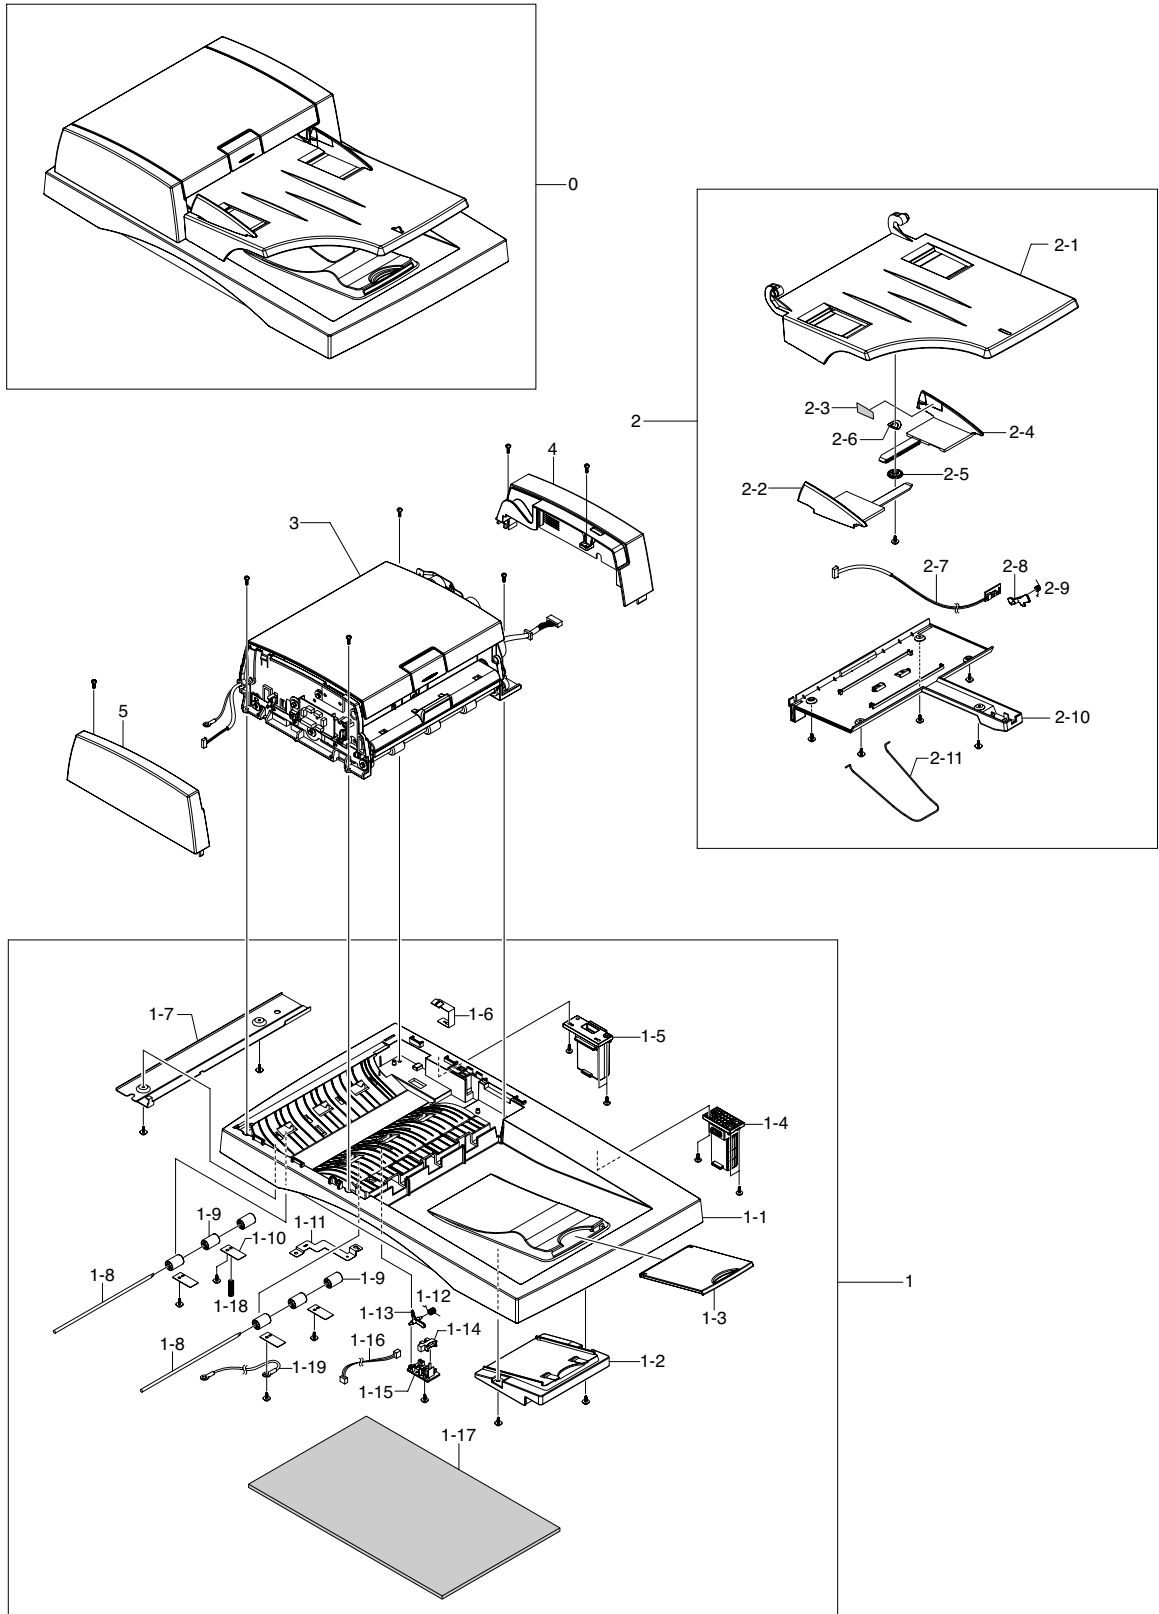


DADF Ass'y Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.16-0	JC96-03553B	ELA HOU-DADF	Z4665	SA
7.16-1	JC96-03554B	ELA HOU-COVER PLATEN	Z4666	SA
7.16-1-1	JC63-00772B	COVER-PLATEN		SNA
7.16-1-2	JC61-00746B	GUIDE-EXTENTION		SNA
7.16-1-3	JC72-01251B	PMO-EXTENTION PLATEN		SNA
7.16-1-4	JC97-02635A	MEA UNIT-HINGE	Z4777	SA
7.16-1-5	JC97-02265A	MEA UNIT-HINGE JF	Z4773	SA
7.16-1-6	JC63-00805A	GROUND-P-COVER GEAR		SNA
7.16-1-7	JC61-00819A	PLATE-P-DUMMY PLATEN	D2043	SA
7.16-1-8	JC66-00661A	SHAFT-EXIT IDLE	F6100	SA
7.16-1-9	JC66-01022A	ROLLER-M_IDLE SCF		SNA
7.16-1-10	JC61-01440A	PLATE-P-SCAN PINCH		SNA
7.16-1-11	JC63-00806A	GROUND-P-DUMMY PLATEN		SNA
7.16-1-12	JB61-00076A	SPRING ETC-TORSION DOC (CC2-F)	O1013	SA
7.16-1-13	JC61-01363A	LEG-M_ACTUATOR FEED		SNA
7.16-1-14	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.16-1-15	JC61-01362A	HOLDER-M_ACTUATOR		SNA
7.16-1-16	JC39-00463A	HARNESS-GATE_NEAR		SA
7.16-1-17	JC72-00751B	PPR-SPONGE SHEET		SA
7.16-1-18	JC61-00049A	SPRING ETC-TR(KOR)	Z6248	SNA
7.16-1-19	JB39-00103A	CBF HARNESS-LIU GND	L5004	SA
7.16-2	JC97-02266B	MEA UNIT-TX STACKER	Z4667	SA
7.16-2-1	JC72-01253B	PMO-TX STACKER	Z4668	SA
7.16-2-2	JC61-00740B	GUIDE-DOC_RIGHT		SNA
7.16-2-3	JC68-01622B	LABEL-INSTALLATION		SNA
7.16-2-4	JC61-01317B	GUIDE-DOC_LEFT		SNA
7.16-2-5	JF72-41354A	PMO-GEAR PINION	G0510	SA
7.16-2-6	JF70-10616A	IPR-WASHER SPRING CU	Z4346	SA
7.16-2-7	JC92-01563A	PBA SUB-LENGTH	Z4765	SA
7.16-2-8	JC72-01250B	PMO-ACTUATOR LENGTH	Z4669	SA
7.16-2-9	JB61-00076A	SPRING ETC-TORSION DOC (CC2-F)	O1013	SA
7.16-2-10	JC72-01254B	PMO-TX STACKER LOWER	Z4670	SA
7.16-2-11	JC61-01438A	GUIDE-STACKER WIRE		SNA
7.16-3	JC96-03579B	ELA HOU-DADF SUB	Z4659	SA
7.16-4	JC63-00201B	COVER-REAR	Z4671	SA
7.16-5	JC63-00200B	COVER-FRONT	Z4672	SA

7.17 Cassette

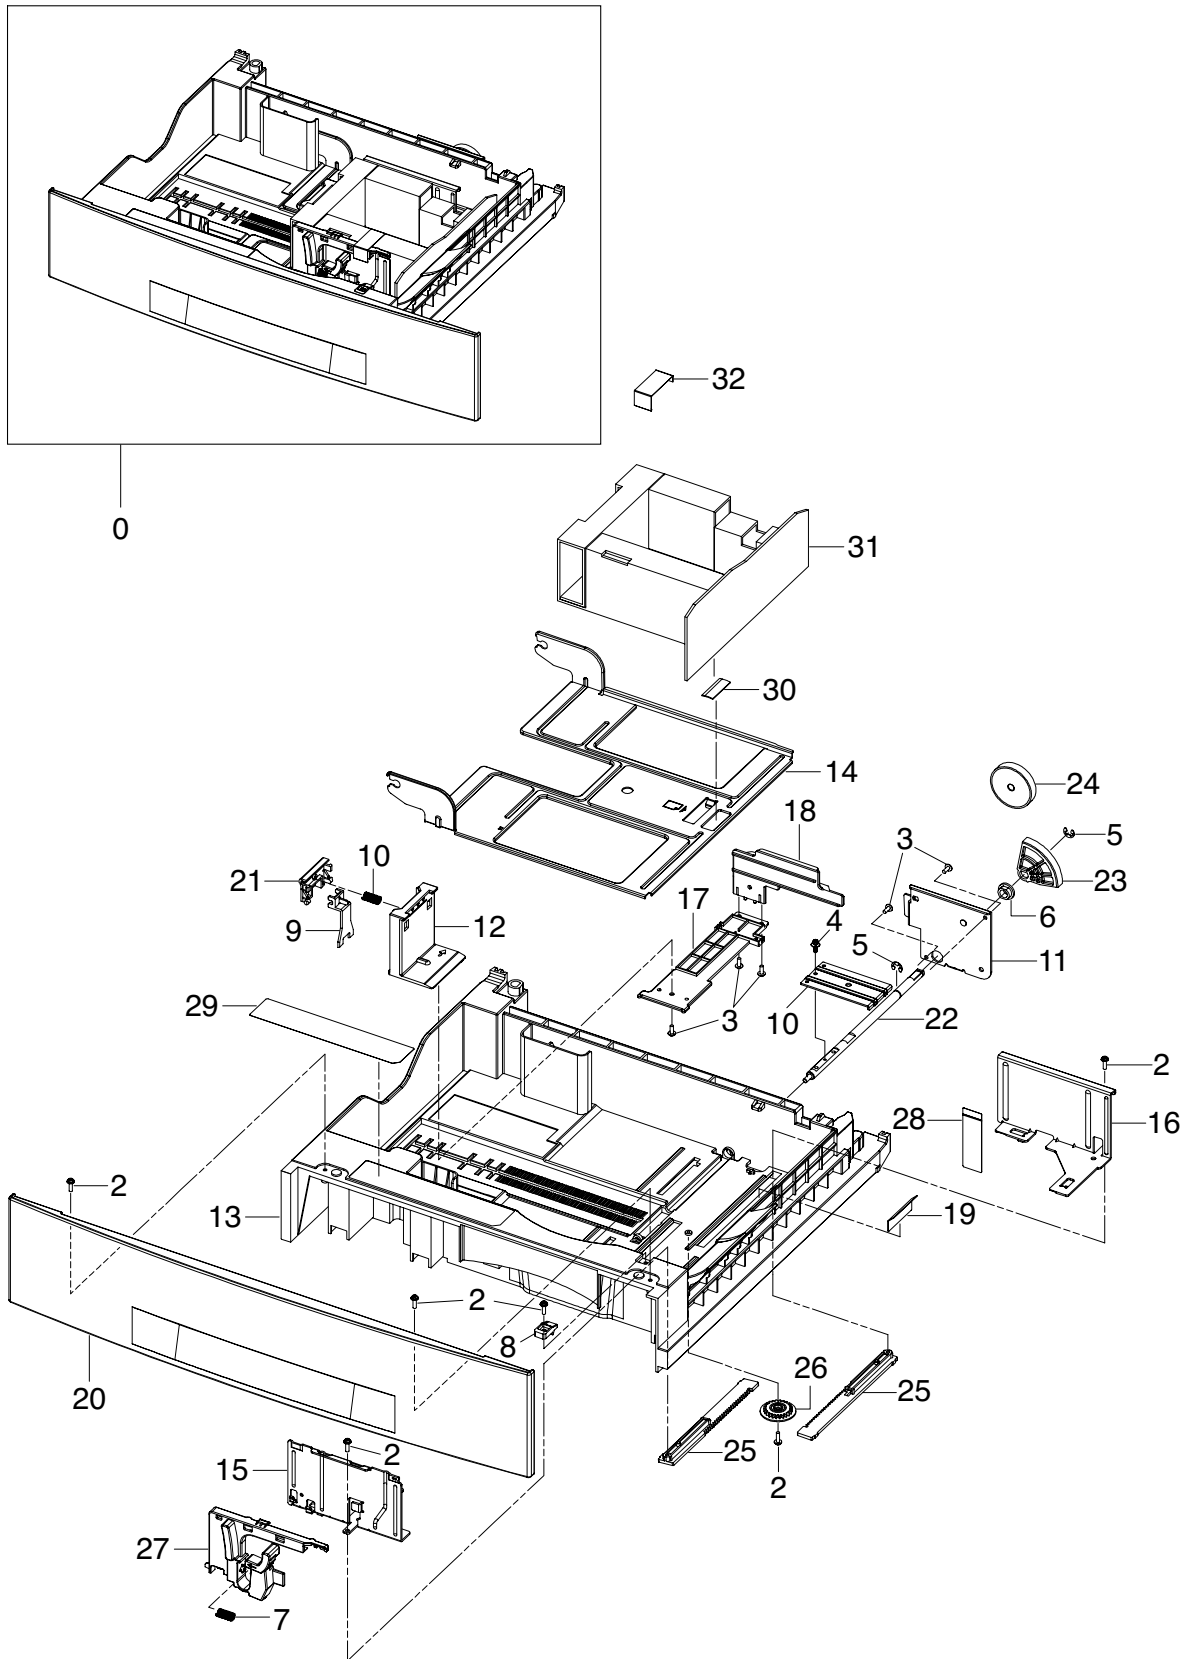


Cassette Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.17-0	JC97-02273B	MEA UNIT-CASSETTE	Z4551	SA
7.17-1	JC61-01411A	FRAME-M_CASSETTE	Z4683	SA
7.17-2	JC63-00782B	COVER-CASSETTE		SNA
7.17-3	JC61-01413A	GUIDE-P-SIDE LEFT	Z4684	SA
7.17-4	JC67-00123A	CAP-M_HANDLE LEFT	Z4714	SA
7.17-5	JC61-00548A	SPRING ETC-WHITE BAR	Z4294	SA
7.17-6	JC61-01414A	GUIDE-P-SIDE RIGHT		SNA
7.17-7	JC68-01621A	LABEL(R)-MAX FILL		SA
7.17-8	JC63-00747A	SHEET-GUIDE RETARD	Z4685	SA
7.17-9	JC66-00956A	GEAR-M_RACK		SNA
7.17-10	JC66-01020A	GEAR-M_PINION 24	Z4712	SA
7.17-11	JC61-00832A	STOPPER-M_KNOCK UP	K5009	SA
7.17-12	JC61-01395A	GUIDE-M_REAR	Z4682	SA
7.17-13	JC66-00202B	LEVER-LENTH HANDLE	Z4689	SA
7.17-14	JC61-01304A	GUIDE-M_HOOK	Z4681	SA
7.17-15	JC61-01412A	PLATE-P-KNOCK UP		SNA
7.17-16	JC69-00494A	PAD-MP(PLUS)	M0005	SA
7.17-17	JC61-01416A	SUPPORT-M_BAR PAPER		SNA
7.17-18	JC61-01417A	SUPPORT-M_PUSH PAPER		SNA
7.17-19	JC66-00953A	SHAFT-PLATE LEVER		SNA
7.17-20	JC61-01322A	PLATE-P-LEVER		SNA
7.17-21	6044-000125	RING-E	R0006	SA
7.17-22	JC61-01394A	BRACKET-P-LIFTING		SNA
7.17-23	JC61-00426A	BUSH-8/5	B0026	SA
7.17-24	JC66-00954A	GEAR-M_LIFTING	Z4690	SA
7.17-25	JC66-00955A	GEAR-M_LIFT COUPLING	Z4691	SA
7.17-26	JC68-01622B	LABEL-INSTALLATION		SNA
7.17-27	6001-000130	SCREW-MACHINE	Z4646	SA

7.18 SCF

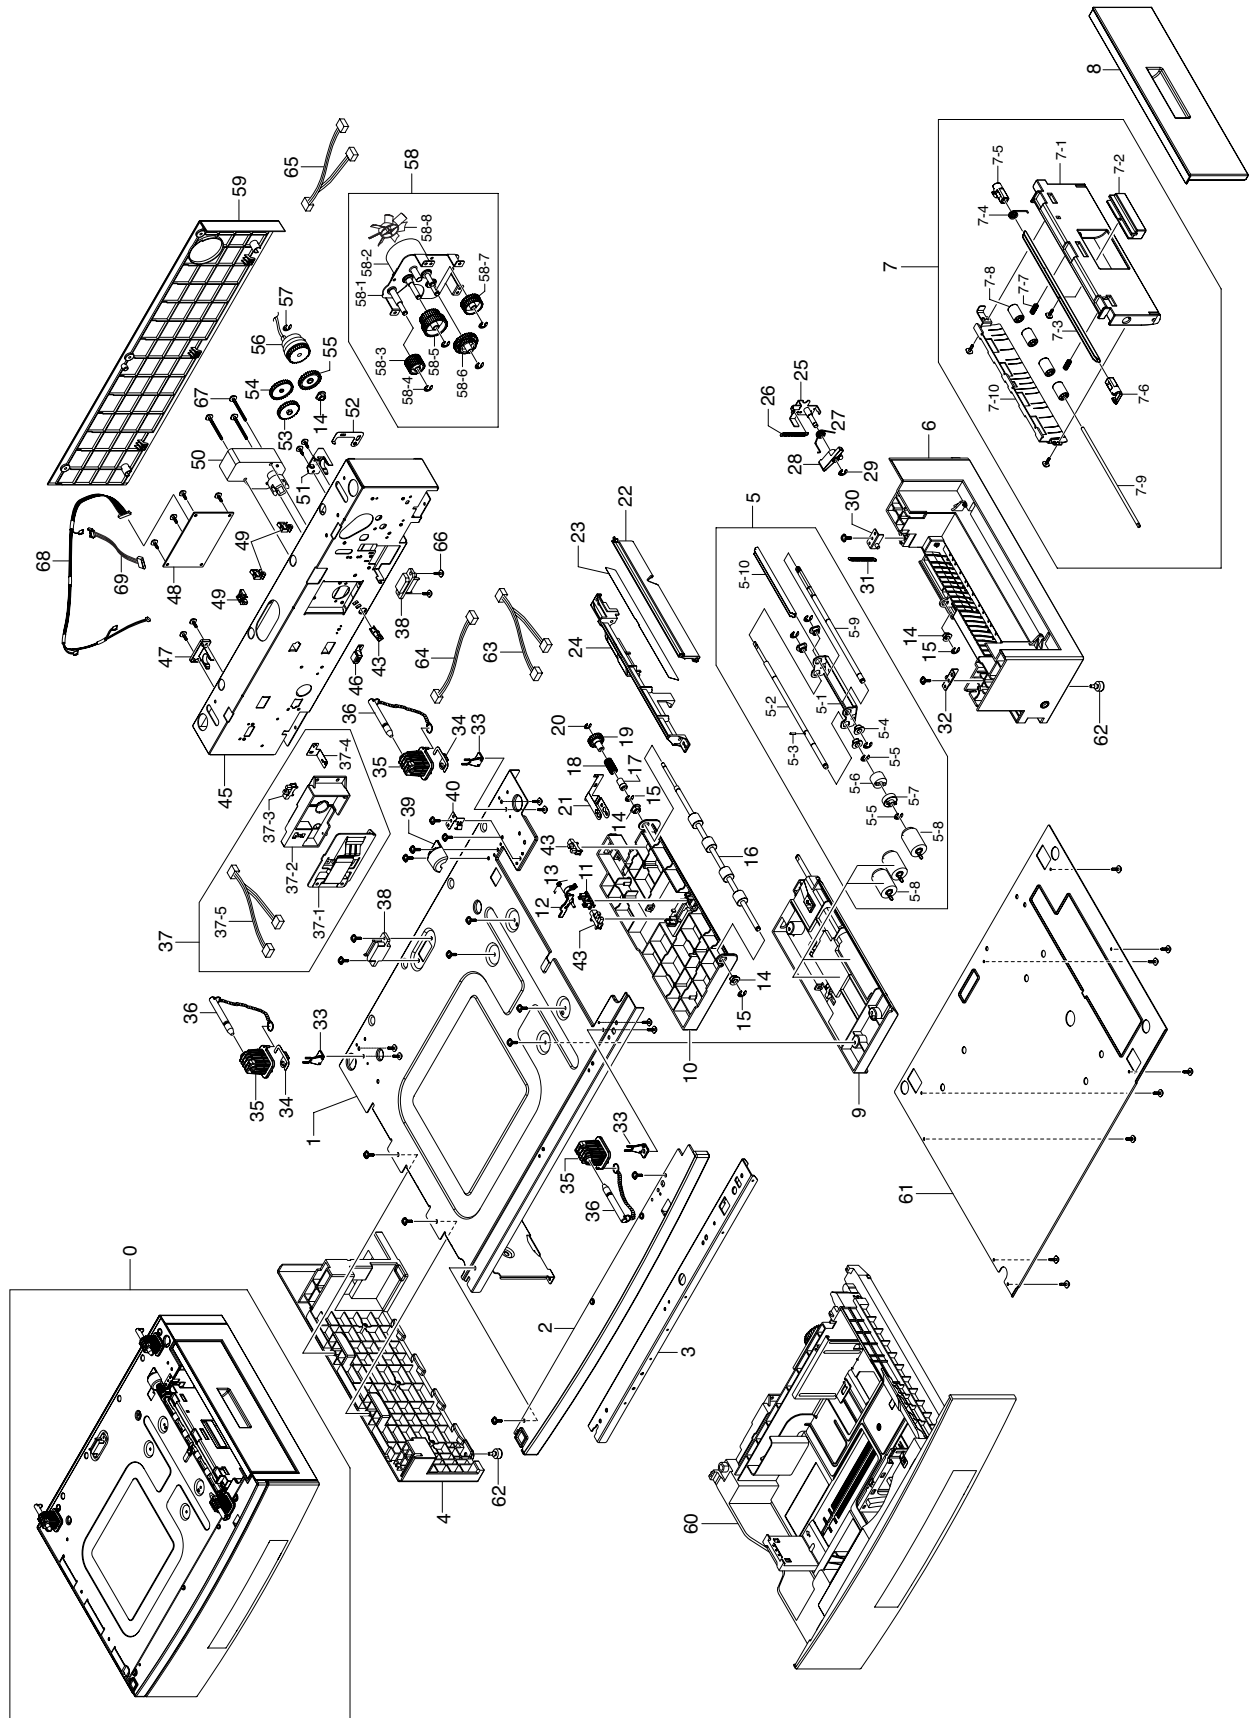

SCF Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.18-0	JC96-03530B	ELA UNIT-SCF; Option Unit		SNA
7.18-1	JC61-01333A	FRAME-P_TOPSCF		SNA
7.18-2	JC63-00771B	COVER-M_FRONTSCF		SNA
7.18-3	JC61-01312A	PLATE-P-BEAM BASE		SNA
7.18-4	JC61-01397B	BASE-M_LEFTSCF		SNA
7.18-5	JC97-02290A	MEA UNIT-RETARD	Z4617	SA
7.18-5-1	JC61-01348A	BRACKET-P-RETARD		SNA
7.18-5-2	JC66-00937A	SHAFT-RETARD S	Z4618	SA
7.18-5-3	JC66-00939A	SHAFT-LOCK	Z4619	SA
7.18-5-4	JC61-00423A	BUSH-6_D	B0025	SA
7.18-5-5	6044-000125	RING-E	R0004	SA
7.18-5-6	JC67-00126A	COUPLER-TORQUELIMITER	Z4790	SA
7.18-5-7	JC66-00976A	JOINT-M_RETARD	Z4789	SA
7.18-5-8	JC97-02259A	MEA UNIT-ROLLER PU	Z4798	SA
7.18-5-9	JC66-00938A	SHAFT-RETARD M		SNA
7.18-5-10	JC61-01349A	BRACKET-P-BAR RETARD		SNA
7.18-6	JC61-01398B	BASE-M_RIGHT SCF		SNA
7.18-7	JC97-02275A	MEA UNIT-SCF DOOR		SA
7.18-7-1	JC61-01327A	GUIDE-M_DOOR INNER		SNA
7.18-7-2	JC64-00208A	HANDLE-M_DOOR		SNA
7.18-7-3	JC61-01404A	BRACKET-P_HANDLE SCF		SNA
7.18-7-4	6107-001206	SPRINGTS		SNA
7.18-7-5	JC64-00204B	LOCKER-M_RIGHT		SNA
7.18-7-6	JC64-00204A	LOCKER-M_LEFT		SNA
7.18-7-7	JC61-70959B	SPRING FEED		SNA
7.18-7-8	JC66-01022A	ROLLER-M_IDLE SCF		SNA
7.18-7-9	JC66-00661A	SHAFT-EXIT IDLE	F6100	SA
7.18-7-10	JC61-01328A	PLATE-P_GUIDE SCF		SNA
7.18-8	JC63-00769B	COVER-M_DOOR SIDE SCF		SNA
7.18-9	JC96-03558A	ELA HOU-PICK UP	Z4606	SA
7.18-10	JC61-01401A	HOUSING-M_PICKUP SCF		SNA
7.18-11	JC61-01422A	HOLDER-M_ACT READY	Z4608	SA
7.18-12	JC61-01402A	LEG-M_ACT FEED SCF		SNA
7.18-13	6107-001262	SPRING-TS	Z4642	SA
7.18-14	JC61-00423A	BUSH-6_D	B0025	SA
7.18-15	6044-000125	RING-E	R0004	SA
7.18-16	JC66-01025A	MEC_ROLLER_SCF_DRV		SNA
7.18-17	JG72-40732A	PMO-BUSHING HOLDER		SNA
7.18-18	JB61-70904A	SPRING ETC-CLUTCH	C9078	SA
7.18-19	JC66-00964A	GEAR-M_FEED SCF		SNA
7.18-20	6044-000159	RING-C	Z4357	SA
7.18-21	JC63-00825A	GROUND-P_SHAFTSCF		SNA
7.18-22	JC61-01326A	GUIDE-M_PUUPPERSCF		SNA

SCF Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.18-23	JC63-00754A	SHEET-GUIDEFILMSCF		SA
7.18-24	C61-01325A	GUIDE-M_PULOWERSCF		SNA
7.18-25	JC61-01423A	BRACKET-P-ARM FRIC		SNA
7.18-26	6107-001257	SPRING-ES	Z4626	SA
7.18-27	6107-001262	SPRING-TS		SNA
7.18-28	JC66-00959A	LEVER-M_ARM FRICTION	Z4613	SA
7.18-29	6044-000125	RING-E	R0004	SA
7.18-30	JC61-01400A	PLATE-P_LOCKER R		SNA
7.18-31	6107-001257	SPRING-ES	Z4624	SA
7.18-32	JC61-01399A	PLATE-P_LOCKER L		SNA
7.18-33	JC64-00207A	LOCKER-M_GRIPPIN		SNA
7.18-34	JC63-00826A	GROUND-P_TOP		SA
7.18-35	JC61-01403A	HOLDER-M_PIN		SNA
7.18-36	JC66-01021A	SHAFT-PIN LOCK		SA
7.18-37	JC96-03735A	ELA HOU-SIZE SENSOR		SA
7.18-37-1	JC96-02127A	ELA HOU-CST SENSOR HAWK16	Z2263	SA
7.18-37-2	JC61-01343A	HOUSING-M_SIZE SENSOR		SA
7.18-37-3	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.18-37-4	JC63-00794A	GROUND-P-PAPER SIZE		SA
7.18-37-5	JC39-00548A	CBFHARNES-SCF_TRAY		SNA
7.18-38	JC39-00547A	CBFHARNES-SCF		SA
7.18-39	JC67-00124A	CAP-M_GEAR FEED		SNA
7.18-40	JC63-00824A	GROUND-P DOOR INNER		SNA
7.18-43	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.18-45	JC61-01324A	FRAME-P_REAR SCF		SNA
7.18-46	JC70-11028A	IPR-GROUND TOP	K3332	SA
7.18-47	JC61-01345A	HOLDER-M_CST L		SNA
7.18-48	JC92-01697A	PBA SUB-SCF		SA
7.18-49	6502-000132	CABLE CLAMP	C0069	SA
7.18-50	JC31-00045A	MOTOR GEARED-P LIFT		SA
7.18-51	JC61-01344A	HOLDER-M_CST R		SNA
7.18-52	JC63-00833A	GROUND-P-SHAFT RETARD	Z4737	SA
7.18-53	JC66-00975A	GEAR-M_RETARD	Z4694	SA
7.18-54	JC66-00974A	GEAR-M_FORWARD	Z4693	SA
7.18-55	JC66-00973A	GEAR-M_PICKUP IDLE B	Z4692	SA
7.18-56	JC66-00994A	CLUTCH-5K Z32	Z4550	SA
7.18-57	6044-000125	RING-E	R0004	SA
7.18-58	JC96-03542A	ELA HOU-SCF DRIVE		SA
7.18-58-1	JC61-01420A	BRACKET-P_SCFDRIVE		SNA
7.18-58-2	JC31-00028B	Motor Pickup SCF		SNA
7.18-58-3	JC66-00966A	GEAR-M_FDIDLE B SCF		SNA
7.18-58-4	6044-000125	RING-E	R0006	SA
7.18-58-5	JC66-00965A	GEAR-M_FDIDLEASCF		SNA

SCF Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.18-58-6	JC66-00967A	GEAR-M_PUIDLEASCF		SNA
7.18-58-7	JC66-00968A	GEAR-M_PUIDLECSF		SNA
7.18-58-8	JC72-00825A	PMO-IMPELLER_DRV	O1103	SA
7.18-59	JC63-00770B	COVER-M_REARSCF		SNA
7.18-60	JC97-02273B	MEA UNIT-CASSETTE	Z4551	SA
7.18-61	JC61-01323A	FRAME-P_BOTTOMSCF		SNA
7.18-62	JC61-40001A	FOOT-ML80	F0003	SA
7.18-63	JC39-00461A	HARNESS-SCF_FEED		SNA
7.18-64	JC39-00463A	HARNESS-GATE_NEAR		SA
7.18-65	JC39-00549A	CBFHARNESS-SCF_CLUT		SNA
7.18-66	6009-001390	SCREW-SPECIAL	Z4565	SNA
7.18-67	6003-000221	SCREW-TAPTITE		SA
7.18-68	JC39-00462A	HARNESS-SCF_EMPTY		SA
7.18-69	JC39-00477A	HARNESS-MOTOR_SW		SA

7.19 Fax Unit

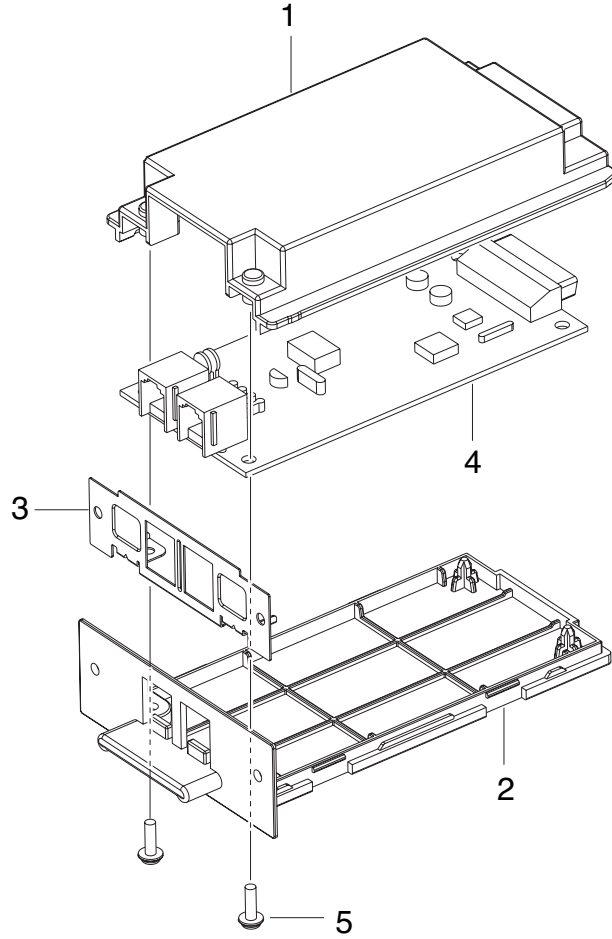


Fax Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.19-0	JC96-04081B	ELA HOU-FAX; Option Unit		SA
7.19-1	JC63-00822B	COVER-M_LIUUPPER		SNA
7.19-2	JC63-00823B	COVER-M_LIUBOTTOM		SNA
7.19-3	JC61-01396A	BRACKET-P_LIU		SNA
7.19-4	JC92-01699A	PBASUB-FAX_PARALLE		SA
7.19-5	6003-000221	SCREW-TAPTITE	Z4397	SA

7.20-1 Main

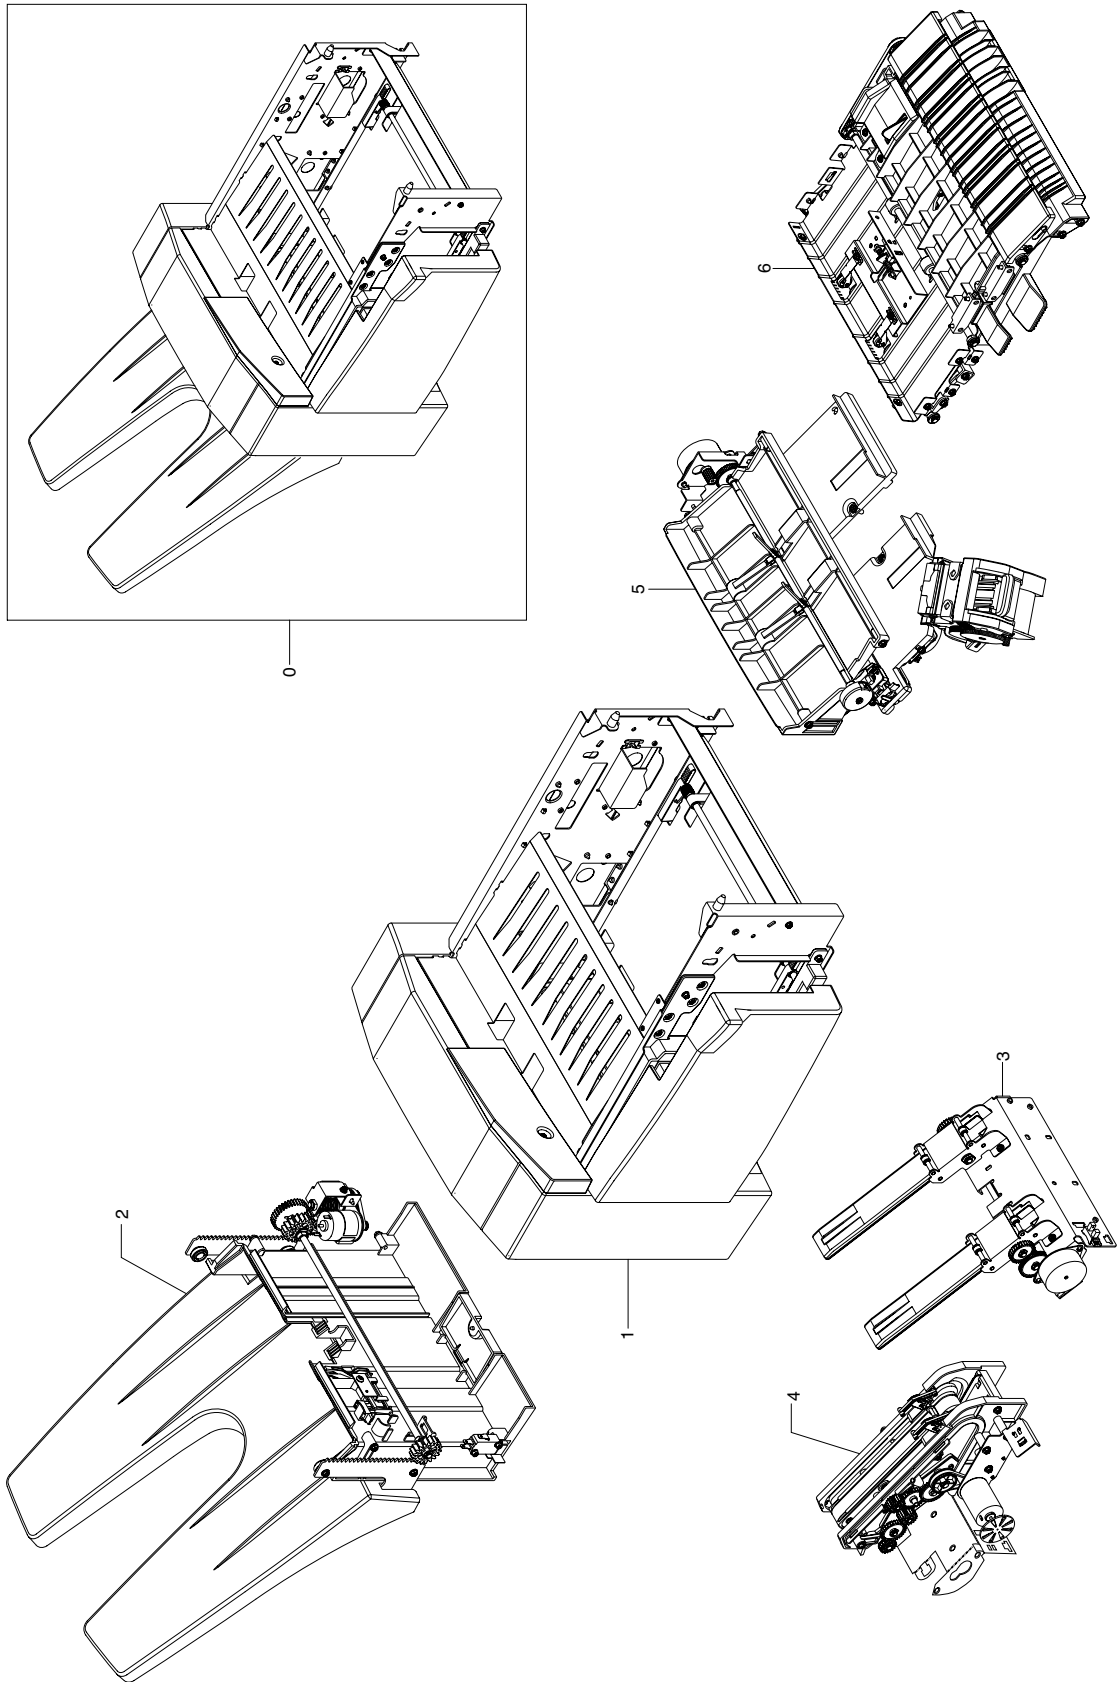


Main Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.20-1-0	JC96-03908C	ELA HOU-FINISHER; Option Unit		SNA
7.20-1-1	-	FRAME UNIT		SNA
7.20-1-2	-	STACKER UNIT		SNA
7.20-1-3	-	EXTENTION TRAY UNIT		SNA
7.20-1-4	JC81-03773A	EJECTOR UNIT		SA
7.20-1-5	-	COMPILE UNIT		SNA
7.20-1-6	-	FEED UNIT		SNA

7.20-2 Frame Unit

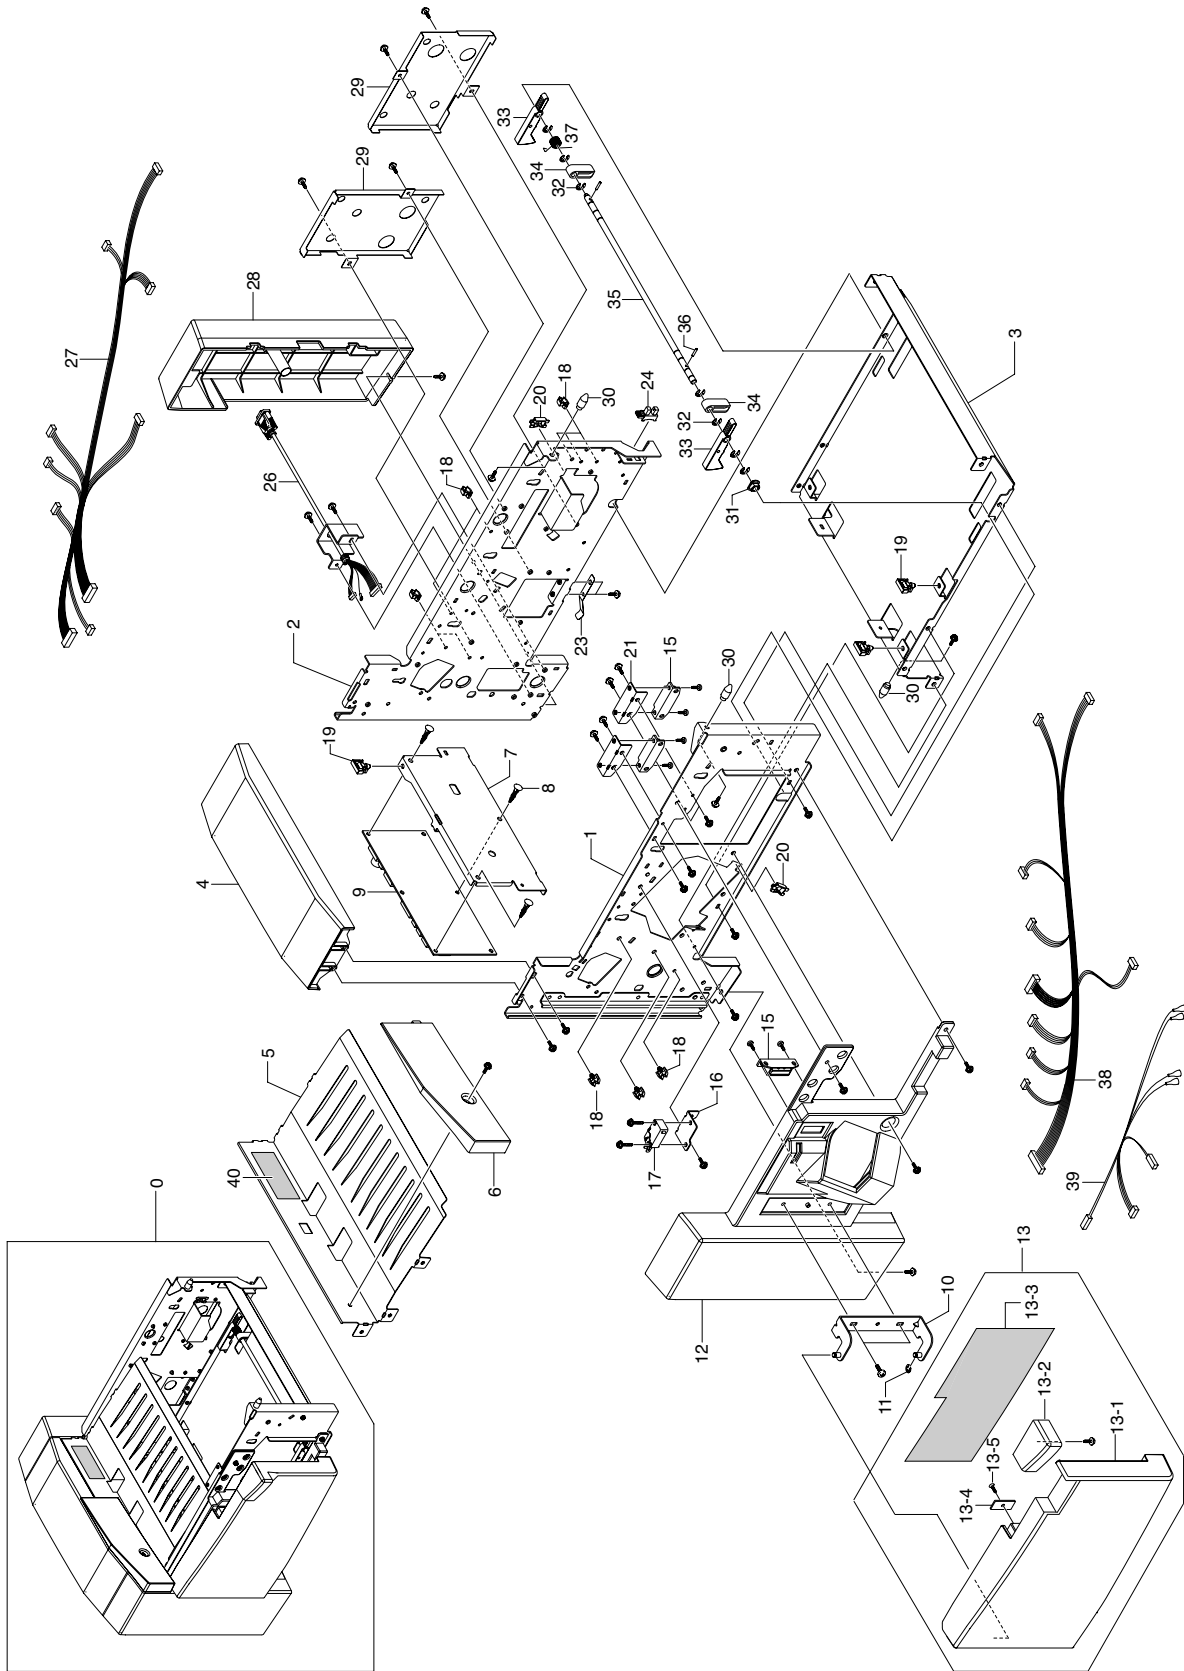


Frame Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.20-2-0	-	FRAME UNIT		SNA
7.20-2-1	-	ASSY:SIDEPLATE:FRONT		SNA
7.20-2-2	-	ASSY:SIDEPLATE:REAR		SNA
7.20-2-3	-	BASE:LOWER		SNA
7.20-2-4	JC81-03487A	AS-COVER TOP		SA
7.20-2-5	-	STAY:DUPLEX GUIDE		SNA
7.20-2-6	JC81-03767A	AS-COVER SCAN DUMMY		SA
7.20-2-7	-	BKT:MAIN PCB		SNA
7.20-2-8	-	BUTTON LOCKING SUPPORT:BLSS12		SNA
7.20-2-9	JC81-03467A	AS-PCB MAIN ASSYJC81-03467A		SA
7.20-2-10	-	ASSY:HINGE:DOOR		SNA
7.20-2-11	-	E-RING:*4		SNA
7.20-2-12	JC81-03768A	AS-COVERFRONT		SA
7.20-2-13	JC81-03488A	AS-COVERDOORASSY		SA
7.20-2-13-1	-	COVER-DOOR		SNA
7.20-2-13-2	-	HANDLE-DOOR		SNA
7.20-2-13-3	-	LABEL-STAPLEREPLACE		SNA
7.20-2-13-4	-	MAGNETCATCHPLATE:12x26		SNA
7.20-2-13-5	-	SCREW-TAPTITEFH,+B,M3,L8		SNA
7.20-2-15	JC81-03468A	AS-MAGNETASSY		SA
7.20-2-16	-	BKT:INTERLOCK:DOOROPEN		SNA
7.20-2-17	JC81-03469A	AS-SWITCHMICRO		SA
7.20-2-18	-	MICROWIRESADDLE		SNA
7.20-2-19	-	SIDELOCKINGSADDLE		SNA
7.20-2-20	-	COVERSADDLE:DS-1		SNA
7.20-2-21	-	BKT:MAGNET:GUIDE		SNA
7.20-2-23	-	LEAFSPRING:EARTH		SNA
7.20-2-24	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.20-2-26	JC81-03470A	AS-MHINTERFACEASSY		SA
7.20-2-27	-	ASSY:MH:REARFRAME		SNA
7.20-2-28	JC81-03490A	AS-COVERREAR		SA
7.20-2-29	-	BKT:COVER:REAR		SNA
7.20-2-30	-	STUD:SET		SNA
7.20-2-31	JC61-00423A	BUSH-6_D	B0025	SNA
7.20-2-32	-	E-RING:*4		SNA
7.20-2-33	-	HOOK:INSTALL		SNA
7.20-2-34	-	GUIDE:SET		SNA
7.20-2-35	-	SHAFT:HOOK:SET		SNA
7.20-2-36	-	PARALLELPIN:*2x10		SNA
7.20-2-37	-	T-SPRING:HOOK:SET		SNA
7.20-2-38	-	ASSY:MH:FRONTFRAME		SNA
7.20-2-39	-	ASSY:MH:INTERLOCK		SNA
7.20-2-40	-	RATING-LABEL		SNA

7.20-3 Stacker Unit

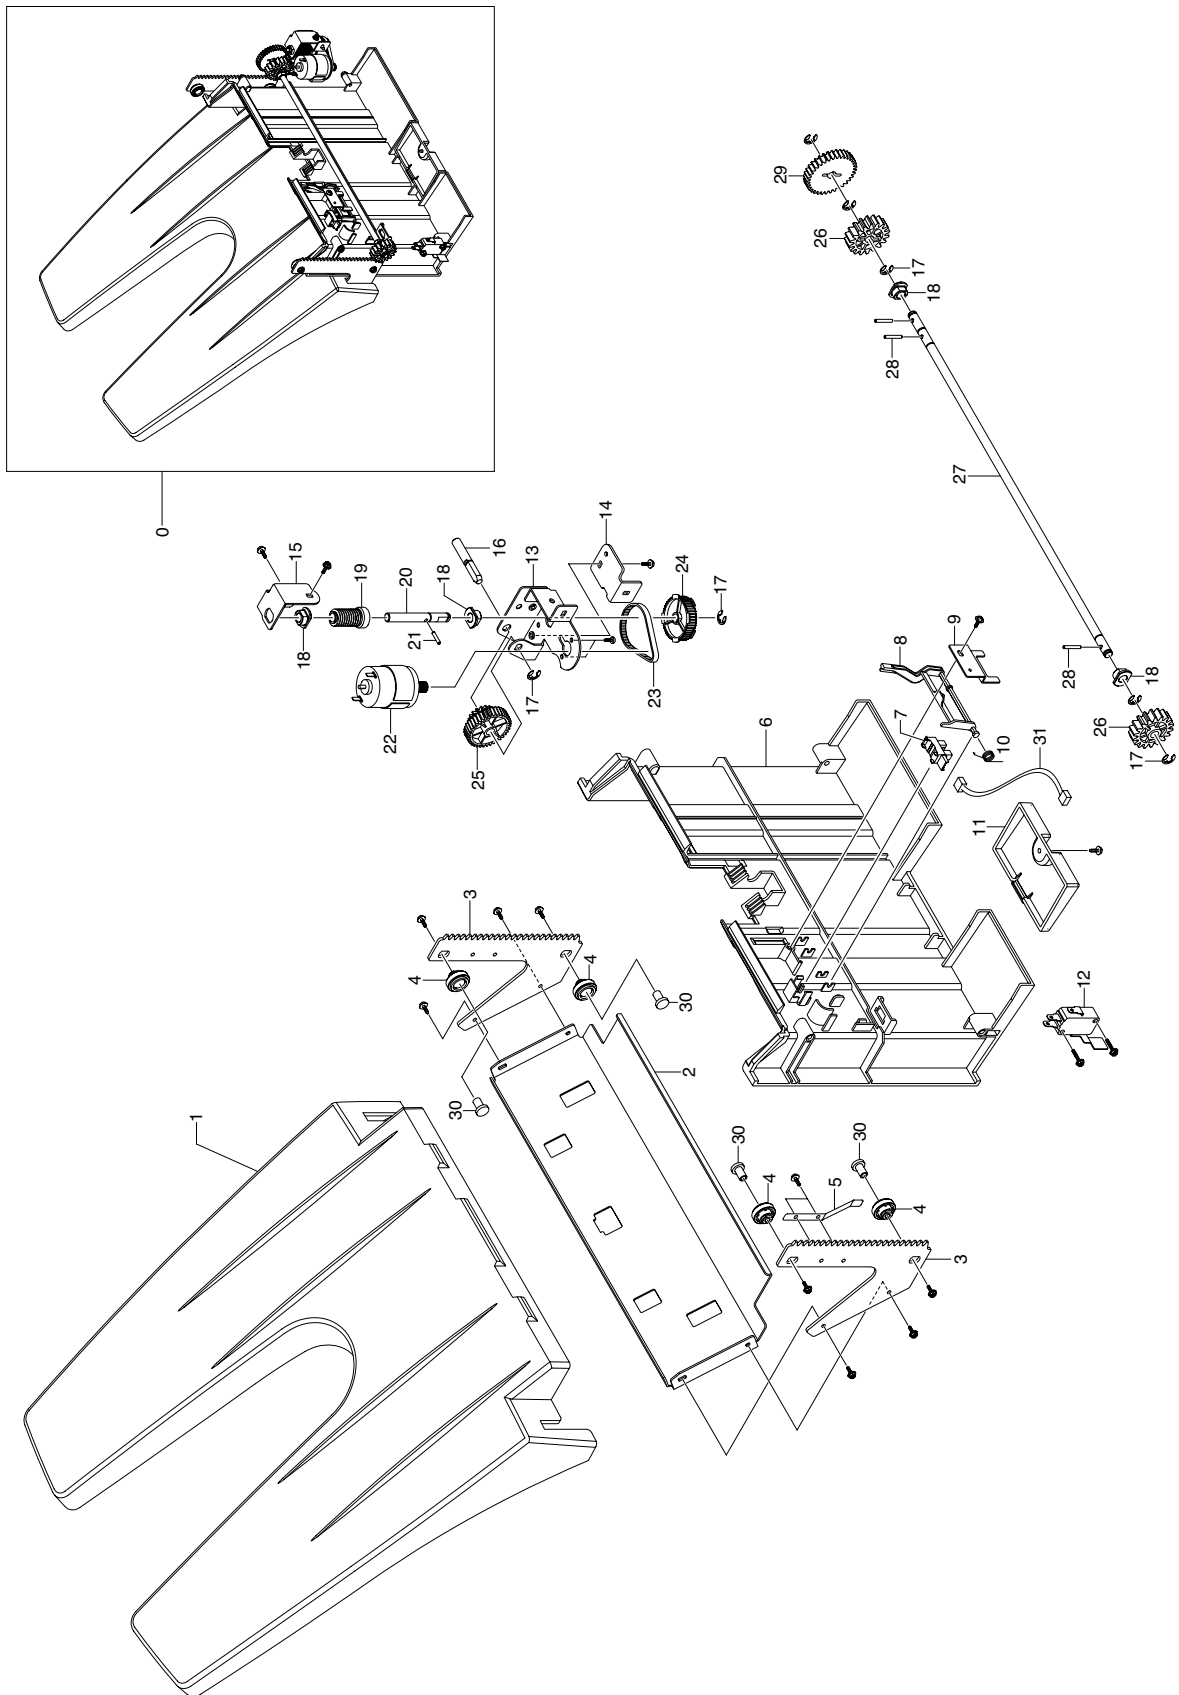


Stacker Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.20-3-0	-	STACKERUNIT		SNA
7.20-3-1	JC81-03472A	AS-TRAYSTACKER		SA
7.20-3-2	-	STAY:STACKER		SNA
7.20-3-3	-	SIDEFRA:STACKER		SNA
7.20-3-4	-	ROLLER:STACKER		SNA
7.20-3-5	-	LEAFSPRING:EARTH		SNA
7.20-3-6	-	SHIELD:STACKER		SNA
7.20-3-7	0604-001095	PISENSOR:GP1S73P2	P0013	SA
7.20-3-8	-	ACTUATOR:STACKER		SNA
7.20-3-9	-	BKT:SENSOR		SNA
7.20-3-10	-	T-SPRING:ACTUATOR:STACK		SNA
7.20-3-11	-	COVER:PCB		SNA
7.20-3-12	JC81-03471A	AS-MSSTACKERASSY		SA
7.20-3-13	-	BKT:MOTOR:STACKER		SNA
7.20-3-14	-	BKT:SUPPORT:MOTOR		SNA
7.20-3-15	-	BKT:WORM:STACK		SNA
7.20-3-16	-	SHAFT:WORMWHEEL		SNA
7.20-3-17	-	E-RING:4		SNA
7.20-3-18	JC61-00423A	BUSH-6_D	B0025	SNA
7.20-3-19	JC81-03489A	AS-WORMSTACKER		SA
7.20-3-20	-	SHAFT:WORM		SNA
7.20-3-21	-	PARALLELPIN:210		SNA
7.20-3-22	JC81-03484A	AS-MOTORDC		SA
7.20-3-23	JC81-03525A	AS-BELTSTACKER		SA
7.20-3-24	JC81-03491A	AS-PULLEYS2M48T		SA
7.20-3-25	JC81-03524A	AS-W_WHEELSTACKER		SA
7.20-3-26	JC81-03492A	AS-GEARPINION18T		SA
7.20-3-27	-	SHAFT:STACKER:DRIVE		SNA
7.20-3-28	-	PARALLELPIN:214		SNA
7.20-3-29	JC81-03523A	AS-GEARSPURZ35		SA
7.20-3-30	-	STUD:STACKER:LIFT		SNA
7.20-3-31	-	ASSY:M/H:STKTOPSNR		SNA

7.20-4 Extension Tray Unit

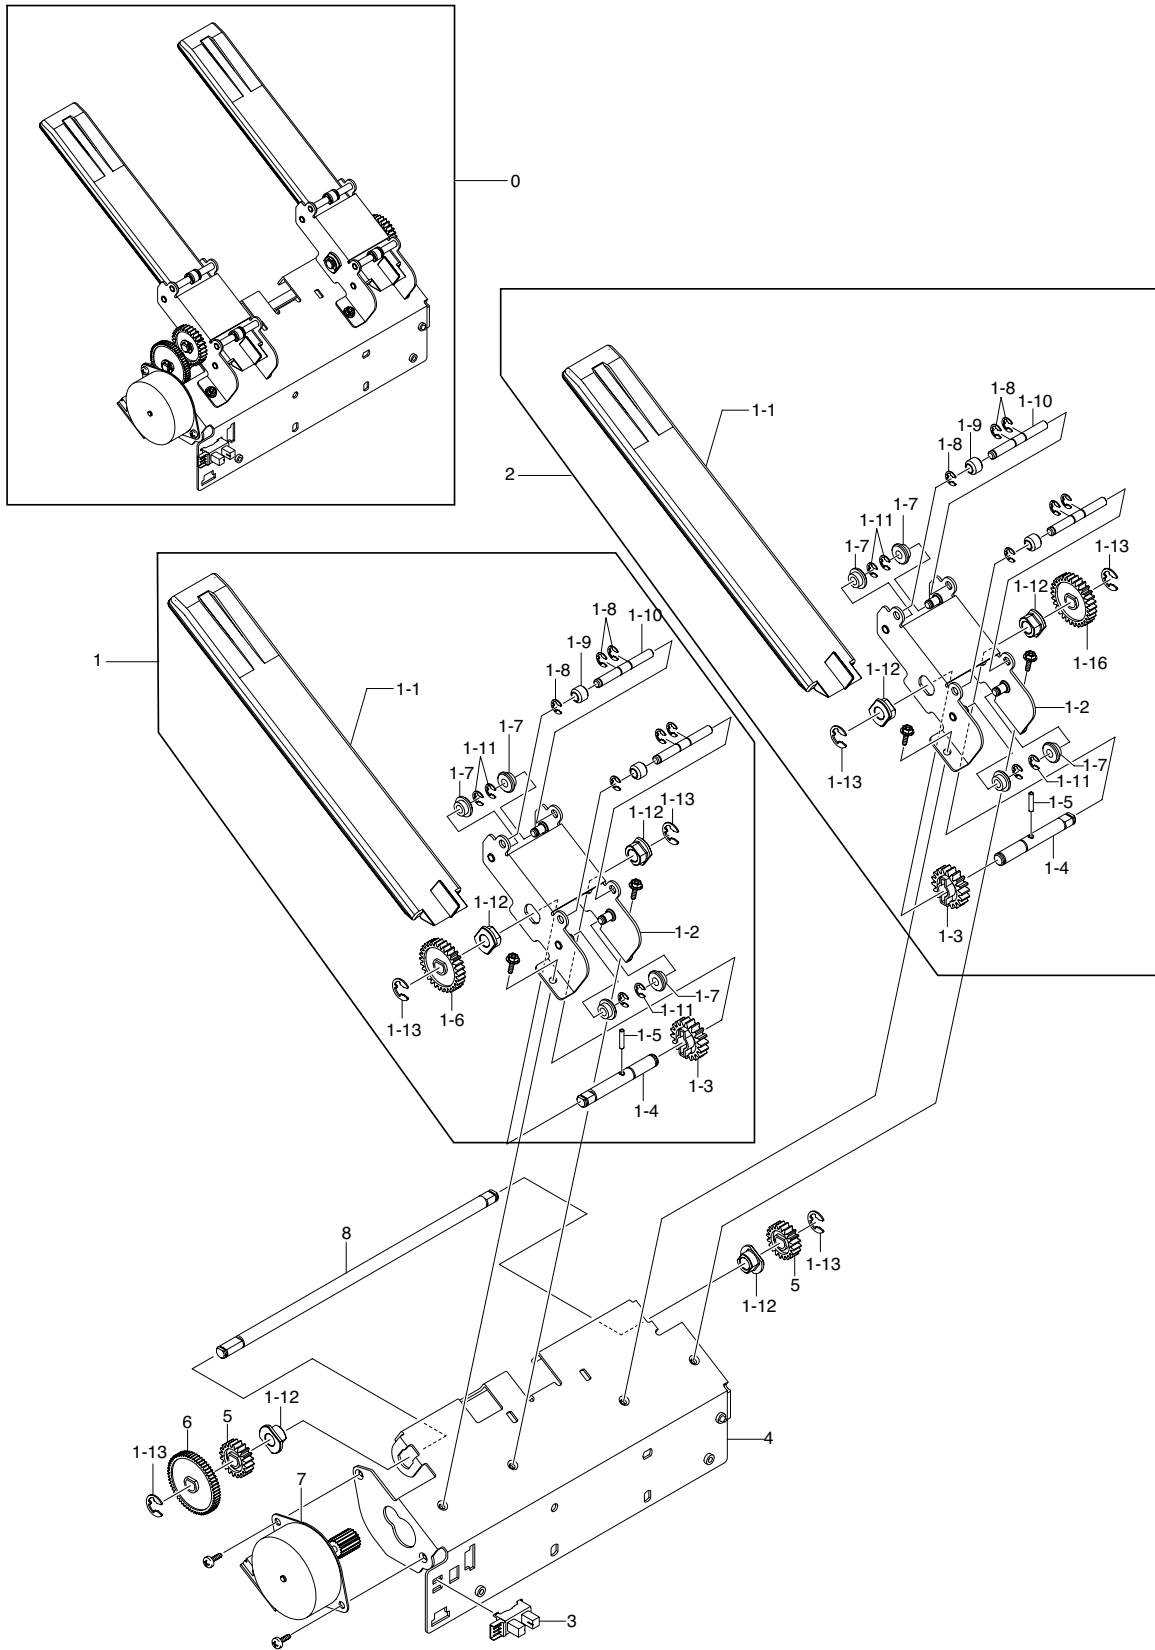


Extension Tray Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.20-4-0	-	EXTENTIONTRAYUNIT		SNA
7.20-4-1	JC81-03769A	AS-SUPPFINGERASSY_F		SA
7.20-4-1-1-1	JC81-03483A	AS-TRAYBERO		SA
7.20-4-1-1-2	-	BKT:TRAY:BERO:ASSY		SNA
7.20-4-1-1-3	JC81-03494A	AS-RACKPINIONZ18		SA
7.20-4-1-1-4	-	SHAFT:RACKPINION		SNA
7.20-4-1-1-5	-	PARALLELPIN:2x10		SNA
7.20-4-1-1-6	JC81-03521A	AS-GEARZ30		SA
7.20-4-1-1-7	-	ROLLER:BERO:LOWER		SNA
7.20-4-1-1-8	-	E-RING:2.5		SNA
7.20-4-1-1-9	-	ROLLER:BERO:UPPER		SNA
7.20-4-1-1-10	-	SHAFT:ROLLER:BERO		SNA
7.20-4-1-1-11	-	E-RING:3		SNA
7.20-4-1-1-12	JC61-00423A	BUSH-6_D	B0025	SNA
7.20-4-1-1-13	-	E-RING:4		SNA
7.20-4-2	JC81-03770A	AS-SUPPFINGERASSY_R		SA
7.20-4-2-1-1	JC81-03483A	AS-TRAYBERO		SA
7.20-4-2-1-2	-	BKT:TRAY:BERO:ASSY		SNA
7.20-4-2-1-3	JC81-03494A	AS-RACKPINIONZ18		SA
7.20-4-2-1-4	-	SHAFT:RACKPINION		SNA
7.20-4-2-1-5	-	PARALLELPIN:2x10		SNA
7.20-4-2-1-6	JC81-03521A	AS-GEARZ30		SA
7.20-4-2-1-7	-	ROLLER:BERO:LOWER		SNA
7.20-4-2-1-8	-	E-RING:2.5		SNA
7.20-4-2-1-9	-	ROLLER:BERO:UPPER		SNA
7.20-4-2-1-10	-	SHAFT:ROLLER:BERO		SNA
7.20-4-2-1-11	-	E-RING:3		SNA
7.20-4-2-1-12	JC61-00423A	BUSH-6_D	B0025	SNA
7.20-4-2-1-13	-	E-RING:4		SNA
7.20-4-3	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.20-4-4	-	FRAME:BERO		SNA
7.20-4-5	JC81-03493A	AS-GEARZ20		SA
7.20-4-6	JC81-03522A	AS-GEARZ60		SA
7.20-4-7	JC81-03473A	AS-MOTORPMASSYZ18		SA
7.20-4-8	-	SHAFT:TRANS:BERO		SNA
7.20-4-8-1-12	JC61-00423A	BUSH-6_D	B0025	SNA
7.20-4-8-1-13	-	E-RING:4		SNA

7.20-5 Ejector Unit

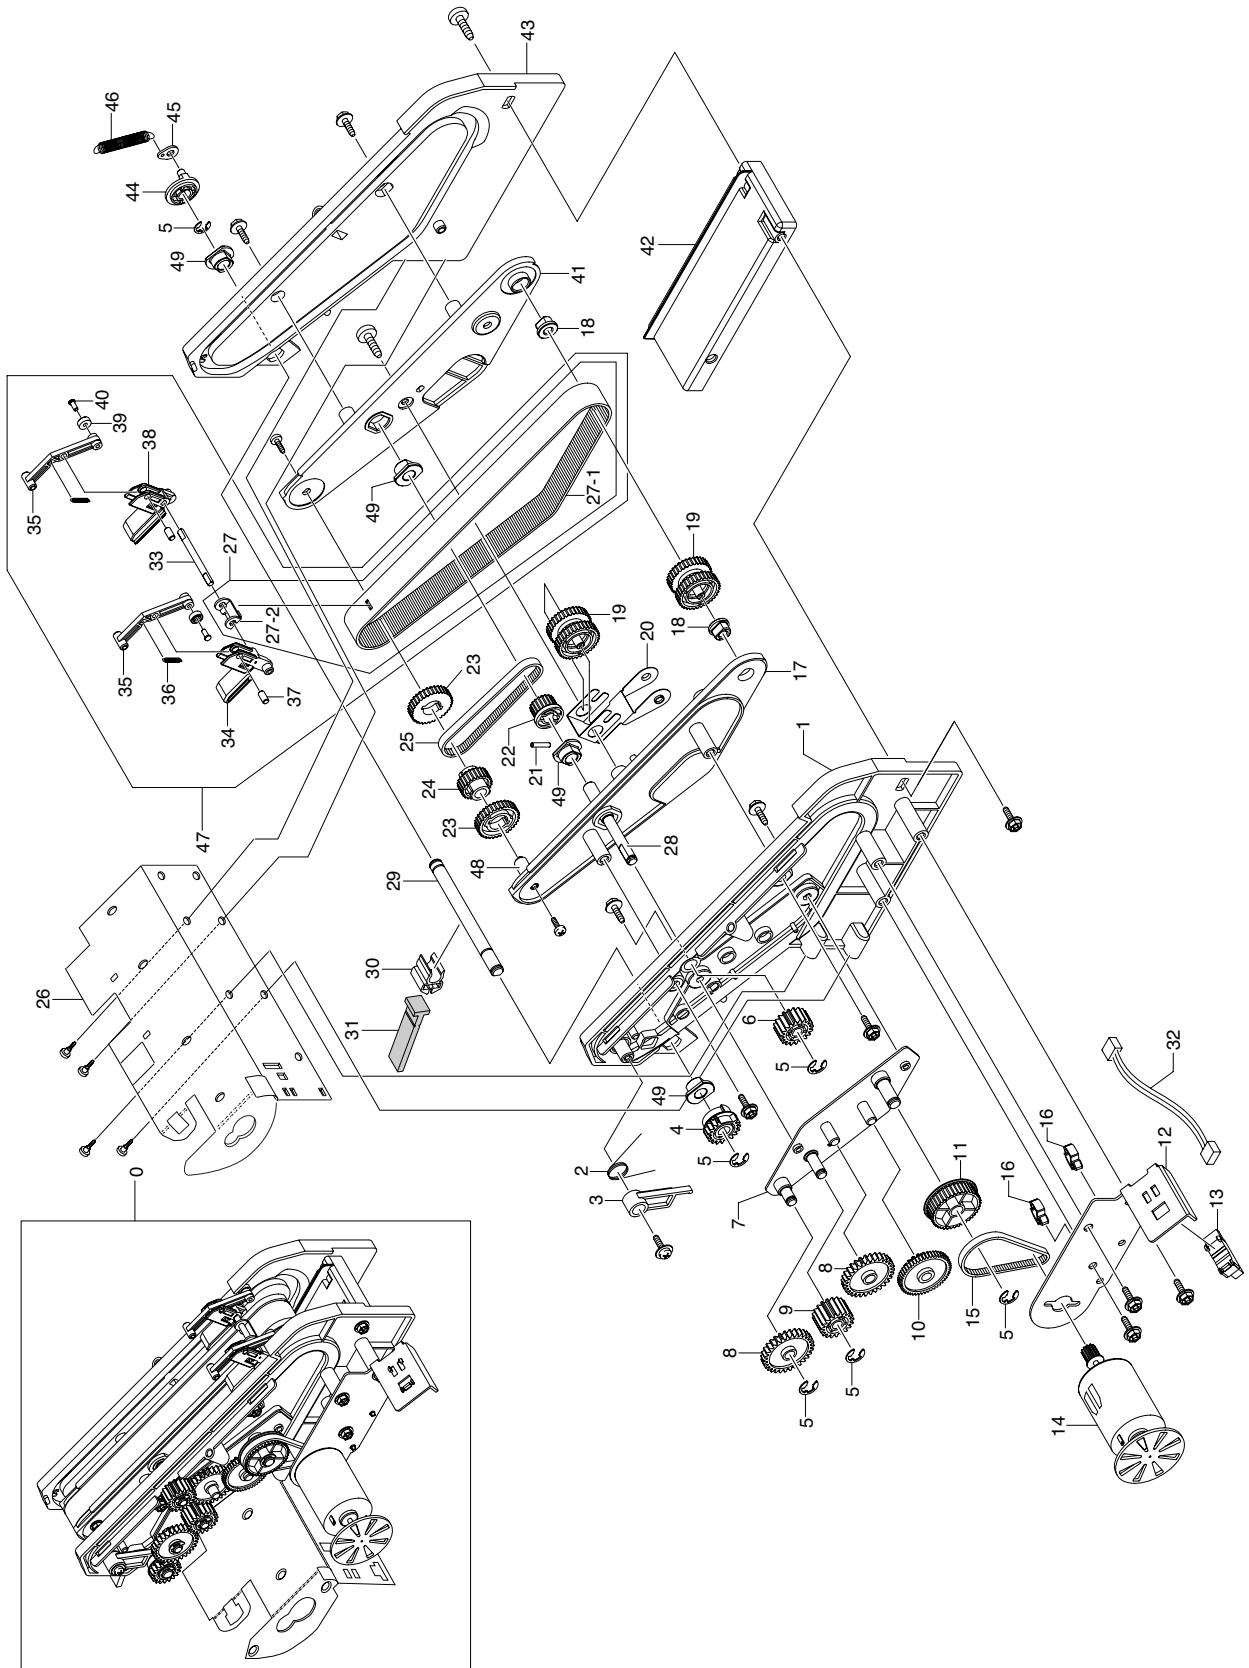

Ejector Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE


Drawer#	SEC_Code	Description	Location	Service
7.20-5-0	JC81-03773A	AS-EJECTORUNITASSY		SA
7.20-5-1	-	FRMAE:FRONT:EJECT		SNA
7.20-5-2	-	T-SPRING:LATCH:SCU		SNA
7.20-5-3	-	HOOK:CAM:EJECT		SNA
7.20-5-4	JC81-03526A	AS-GEARCAMSCU		SA
7.20-5-5	-	E-RING:4		SNA
7.20-5-6	JC81-03495A	AS-SPURGEARZ19		SA
7.20-5-7	-	ASSY:BKT:DRIVING:EJECT		SNA
7.20-5-8	JC81-03504A	AS-SPURGEARZ30		SA
7.20-5-9	JC81-03503A	AS-SPURGEARZ19SCU		SA
7.20-5-10	JC81-03502A	AS-GEARM08Z19M05Z50		SA
7.20-5-11	JC81-03501A	AS-PULLEYS2MT40M05T24		SA
7.20-5-12	-	BKT:DCMOTOR:EJECT		SNA
7.20-5-13	0604-001095	PISENSOR:GP1S73P2	P0013	SA
7.20-5-14	JC81-03474A	AS-MOTOREJECT		SA
7.20-5-15	C81-03500A	AS-BELTB35S2M118J		SA
7.20-5-16	-	MICROWIRESADDLE		SNA
7.20-5-17	-	FRAME:BELT:EJECT:FRONT		SNA
7.20-5-18	JC61-00424A	BUSH-4_D	K2867	SNA
7.20-5-19	C81-03499A	AS-PULLEYS2M34TJ		SA
7.20-5-20	-	PLATESPRING:TIGHTNER:EJECT		SNA
7.20-5-21	-	PARALLELPIN:2x10		SNA
7.20-5-22	JC81-03498A	AS-PULLEYS2M20T		SA
7.20-5-23	JC81-03497A	AS-PULLEYDRVS2M34T		SA
7.20-5-24	JC81-03496A	AS-PULLEYS2M25T		SA
7.20-5-25	JC81-03513A	AS-BELTB35S2M144		SA
7.20-5-26	-	FRAME:BERO		SNA
7.20-5-27	JC81-03512A	AS-BELTASSYEJECT		SA
7.20-5-27-1	-	BELT-EJECTB130S2M370		SNA
7.20-5-27-2	-	HOLER-BELTEJECT		SNA
7.20-5-28	-	SHAFT:BELTTRANS:EJECT		SNA
7.20-5-29	-	SHAFT:SCU		SNA
7.20-5-30	-	HOLDER:SCU		SNA
7.20-5-31	-	PADDLE:SCU		SNA
7.20-5-32	-	ASSY:M/H:EXTTRAYHOMESNR		SNA
7.20-5-33	-	SHAFTD-CUT:GRIPHINGE:EJECT		SNA
7.20-5-34	-	GRIPBASE:FRONT:EJECT		SNA
7.20-5-35	-	GRIPLINK:EJECT		SNA
7.20-5-36	-	E-SPRING:GRIP		SNA
7.20-5-37	-	SHAFT:GRIPHINGE:EJECT		SNA
7.20-5-38	-	GRIPBASE:REAR:EJECT		SNA
7.20-5-39	-	ROLLER:GRIP:EJECT		SNA
7.20-5-40	-	PIN:ROLLER:EJECT		SNA
7.20-5-41	-	FRAME:BELT:EJECT:REAR		SNA

Ejector Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.20-5-42	-	FRAME:RETURN:EJECT		SNA
7.20-5-43	-	FRAME:REAR:EJECT		SNA
7.20-5-44	-	ROTATOR:CAM:SCU		SNA
7.20-5-45	-	HOOK:SPRING:SCU		SNA
7.20-5-46	-	E-SPRING:CLUTCH:SCU		SNA
7.20-5-47	JC81-03772A	AS-EJTBELTSUBASSY		SA
7.20-5-48	-	SHAFT:BELTPULLEY:EJECT		SNA
7.20-5-49	JC61-00423A	BUSH-6_D	B0025	SNA

7.20-6 Compile Unit

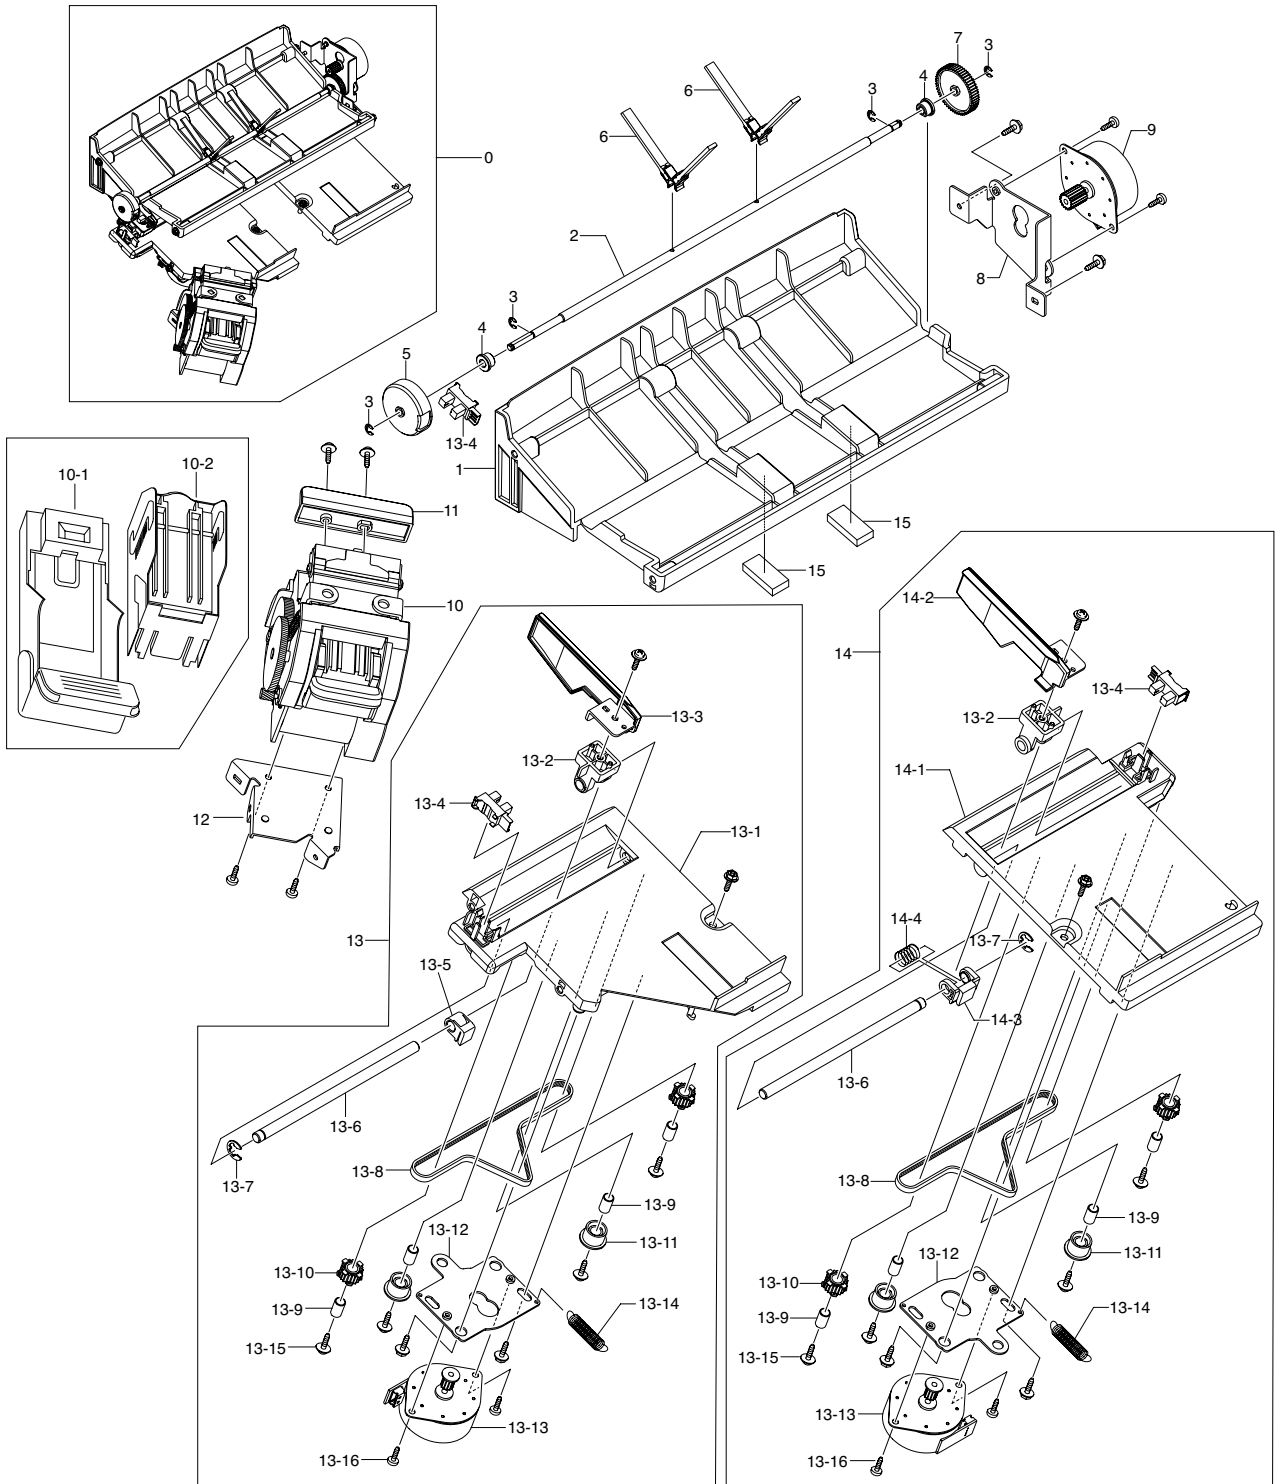


Compile Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.20-6-0	-	COMPILEUNIT		SNA
7.20-6-1	-	COVER:COMPILE:UPPER		SNA
7.20-6-2	-	SHAFT:PADDLE		SNA
7.20-6-3	-	E-RING:3		SNA
7.20-6-4	JC61-00424A	BUSH-4_D	K2867	SNA
7.20-6-5	-	ACTUATOR:HOME:PADDLE		SNA
7.20-6-6	JC81-03482A	AS-PADDLECOMPILE		SA
7.20-6-7	JC81-03510A	AS-GEARPADDLEZ56		SA
7.20-6-8	-	BKT:MOTOR:PADDLE		SNA
7.20-6-9	JC81-03473A	AS-MOTORPMASSYZ18		SA
7.20-6-10	JC81-03475A	AS-STAPLERASSYEH-C590		SA
7.20-6-10-1	JC81-03481A	AS-CARTRIDGESTAPLERNo.590X		SA
7.20-6-10-2	JC81-03476A	AS-STAPLESREFILLNo.505XW		SA
7.20-6-11	-	GUIDE:STAPLER		SNA
7.20-6-12	-	BASEBKT:STAPLER		SNA
7.20-6-13	C81-03511A	AS-FRONTJOGGERASSY		SA
7.20-6-13-1	-	FRAME:COMPILE:FRONT		SNA
7.20-6-13-2	-	LMBUSH:TAMPER		SNA
7.20-6-13-3	-	SIDEFENCE:TAMPER:FRONT		SNA
7.20-6-13-4	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.20-6-13-5	-	HOLDER:BELT:TAMPER:FRONT		SNA
7.20-6-13-6	-	LMSHAFT:TAMPER		SNA
7.20-6-13-7	-	E-RING:4		SNA
7.20-6-13-8	JC81-03509A	AS-BELTB40S2M290		SA
7.20-6-13-9	-	HOLLOWSHAFT:D_6		SNA
7.20-6-13-10	JC81-03508A	AS-PULLEYT20TAMPER		SA
7.20-6-13-11	-	ROLLER:TAMPER		SNA
7.20-6-13-12	-	BKT:MOTOR:TAMPER		SNA
7.20-6-13-13	JC81-03486A	AS-MOTORPMASSYS2M12T		SA
7.20-6-13-14	-	E-SPRING:TIGHTNER:TAMPER		SNA
7.20-6-13-15	-	SCREW-TAPTITEM3L10		SNA
7.20-6-13-16	-	SCREW-TAPPINGM3L8		SNA
7.20-6-14	JC81-03507A	AS-REARJOGGERASSY		SA
7.20-6-14-1	-	FRAME:COMPILE:REAR		SNA
7.20-6-14-2	-	SIDEFENCE:TAMPER:REAR		SNA
7.20-6-14-3	-	HOLDER:BELT:TAMPER:REAR		SNA
7.20-6-14-4	-	C-SPRING:TAMPER		SNA
7.20-6-15	-	DAMPER-SPONGE		SNA

7.20-7 Feed Unit

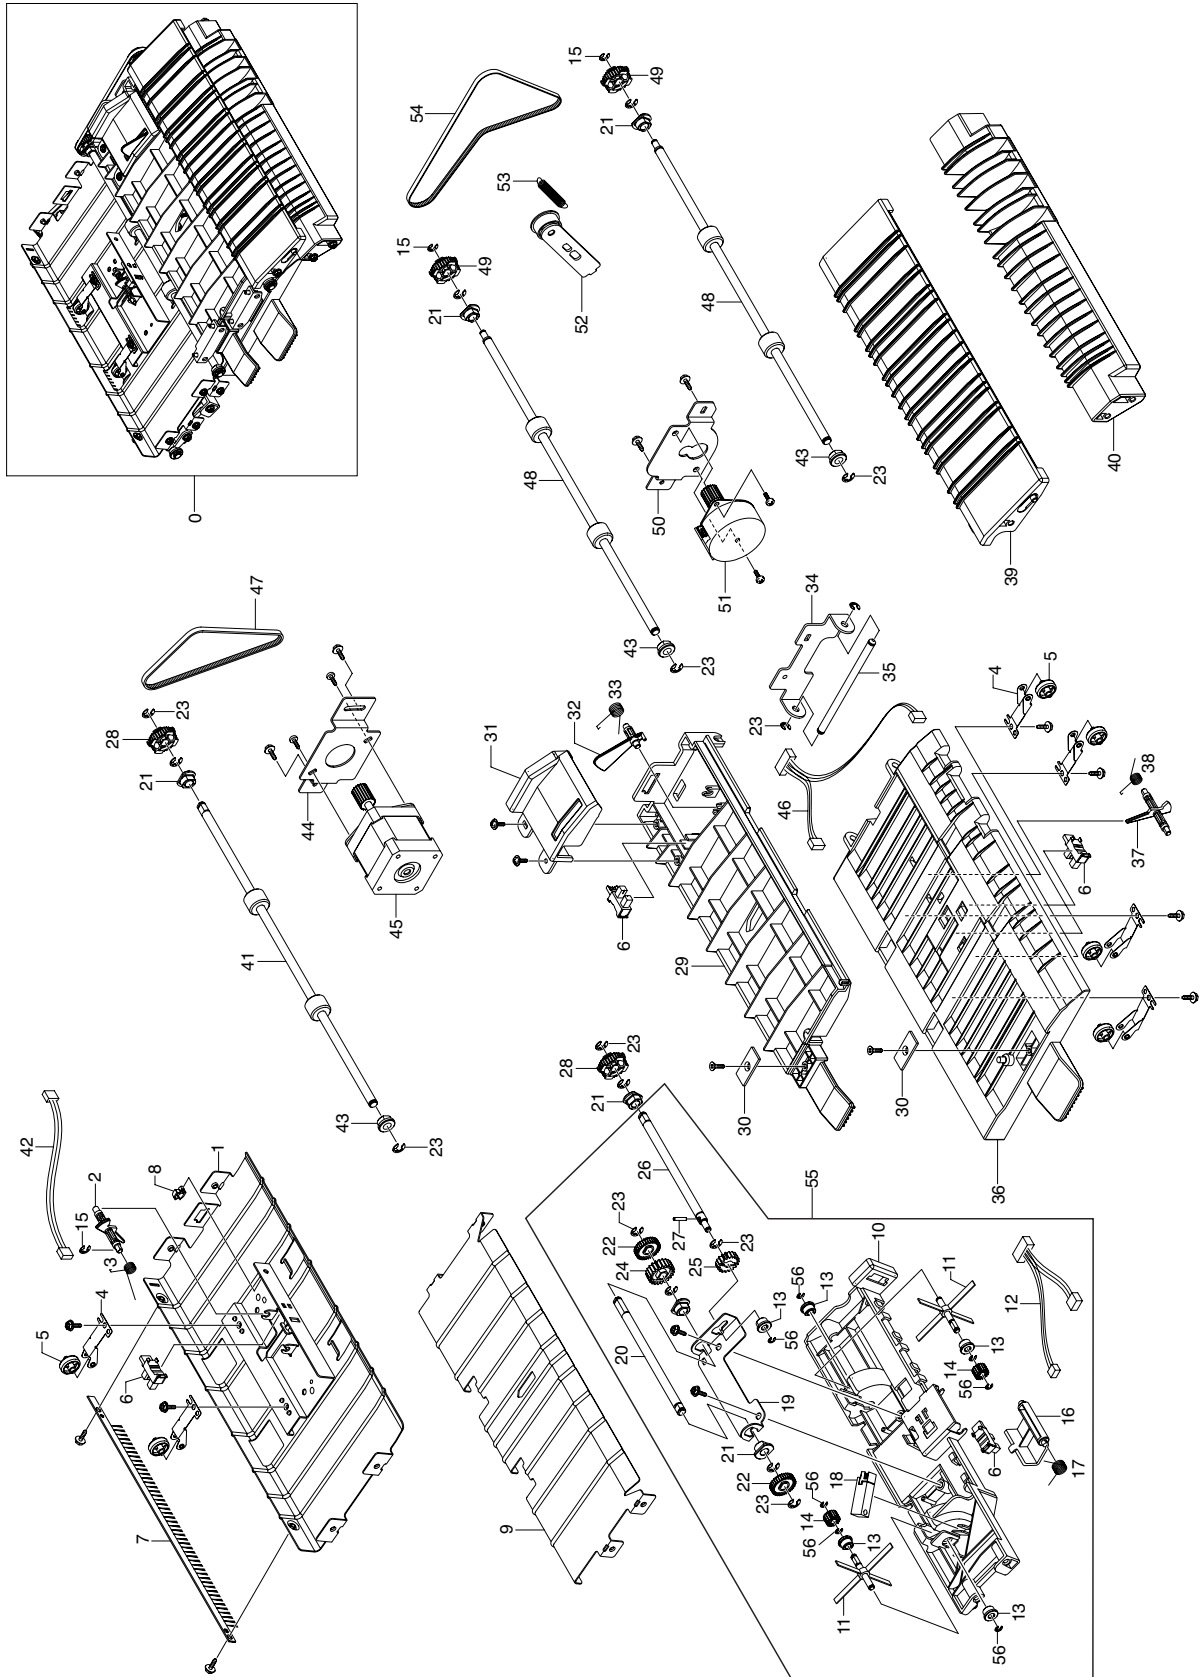

Feed Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.20-7-0	-	FEEDUNIT		SNA
7.20-7-1	-	GUIDE:EXIT:UPPER:ASSY		SNA
7.20-7-2	-	ACTUATOR:FEED		SNA
7.20-7-3	-	T-SPRING:ACTUATOR:FEED		SNA
7.20-7-4	-	LEAFSPRING:FEED		SNA
7.20-7-5	-	ROLLER:IDLE:FEED		SNA
7.20-7-6	0604-001095	PHOTO-INTERRUPTER	P0013	SA
7.20-7-7	JC67-00125A	ANTI-STATICBRUSH	Z4715	SA
7.20-7-8	-	MICROWIRESADDLE		SNA
7.20-7-9	-	GUIDE:EXIT:LOWER		SNA
7.20-7-10	-	GUIDE:COMPILE		SNA
7.20-7-11	JC81-03506A	AS-PADDLESUBASSY		SA
7.20-7-12	-	ASSY:M/H:EJECTHOMESNR		SNA
7.20-7-13	JC61-00424A	BUSH-4_D	K2867	SNA
7.20-7-14	JC81-03505A	AS-GEARPDZ18M05		SA
7.20-7-15	-	E-RING:3		SNA
7.20-7-16	-	ACTUATOR:EJECTOR		SNA
7.20-7-17	-	T-SPRING:ACTUATOR:EJECT		SNA
7.20-7-18	JC81-03480A	AS-SENSORPHOTO		SA
7.20-7-19	-	BKT:PADDLE:SUB		SNA
7.20-7-20	-	SHAFT:TRANS:SUBPADDLE		SNA
7.20-7-21	-	BUSH-6_D		SNA
7.20-7-22	JC81-03520A	AS-GEARSUBPDZ34		SA
7.20-7-23	-	E-RING:4		SNA
7.20-7-24	JC81-03519A	AS-GEARSUBPDZ22		SA
7.20-7-25	JC81-03518A	AS-GEARSUBPDZ18M08		SA
7.20-7-26	-	SHAFT:TRANS:SUBPADDLE:FEED		SNA
7.20-7-27	-	PARALLELPIN:2x10		SNA
7.20-7-28	JC81-03517A	AS-PULLEYT30S2M		SA
7.20-7-29	-	GUIDE:OPEN:DUPLEX		SNA
7.20-7-30	-	MAGNETCATCHPLATE:12x26		SNA
7.20-7-31	-	COVER:ACTUATOR:DUPLEX		SNA
7.20-7-32	-	ACTUATOR:DUPLEX		SNA
7.20-7-33	-	T-SPRING:ACTUATOR:DUPLEX		SNA
7.20-7-34	-	BKT:HINGE:GUIDE		SNA
7.20-7-35	-	SHAFT:HINGE:GUIDE		SNA
7.20-7-36	-	GUIDE:OPEN		SNA
7.20-7-37	-	ACTUATOR:FEED		SNA
7.20-7-38	-	T-SPRING:ACTUATOR:STACK		SNA
7.20-7-39	-	GUIDE:ENTRANCE:UPPER		SNA
7.20-7-40	-	GUIDE:ENTRANCE:LOWER		SNA
7.20-7-41	JC81-03477A	AS-ROLLEREXIT		SA
7.20-7-42	-	ASSY:M/H:EXITSNR		SNA
7.20-7-43	-	BEARING:6		SNA

Feed Unit Parts List

SA : SERVICE AVAILABLE, SNA : SERVICE not AVAILABLE

Drawer#	SEC_Code	Description	Location	Service
7.20-7-44	-	BKT:MOTOR:FEED:EXIT		SNA
7.20-7-45	JC81-03479A	AS-MOTORHBASSY		SA
7.20-7-46	-	ASSY:M/H:MIDSNR		SNA
7.20-7-47	JC81-03516A	AS-BELTB30S2M244		SA
7.20-7-48	JC81-03485A	AS-ROLLERENT		SA
7.20-7-49	JC81-03515A	AS-PULLEYT33S2M		SA
7.20-7-50	-	BKT:MOTOR:FEED:ENT		SNA
7.20-7-51	JC81-03478A	AS-MOTORPMASSY		SA
7.20-7-52	-	ASSY:BKT:TIGHTNER		SNA
7.20-7-53	-	E-SPRING:TIGHTNER:FEED		SNA
7.20-7-54	JC81-03514A	AS-BELTB30S2M354ENT		SA
7.20-7-55	JC81-03771A	AS-FEEDUNITASSY		SA
7.20-7-56	-	E-RING:2.5		SNA