

MDR-V700DJ

SERVICE MANUAL

Ver 1.1 2003.06

US Model
Canadian Model
AEP Model
E Model




SPECIFICATIONS

Type	: Dynamic, Closed
Driver unites	: ø50 mm, dome type
Impedence	: 24 Ω at 1 kHz
Sensitivity	: 107 dB/mW
Power handling capacity	: 3000 mW
Frequency response	: 5 – 30,000 Hz
Cord	: Coiled 1 – 3 m long single-sided LC-OFC litz cord with a gold plated stereo unimatch plug
Mass	: Approx. 300 g (wihout cord)
Supplied accessory	: Carrying pouch (1)

Design and specifications are subject to change without notice.

[WIRING DIAGRAM]

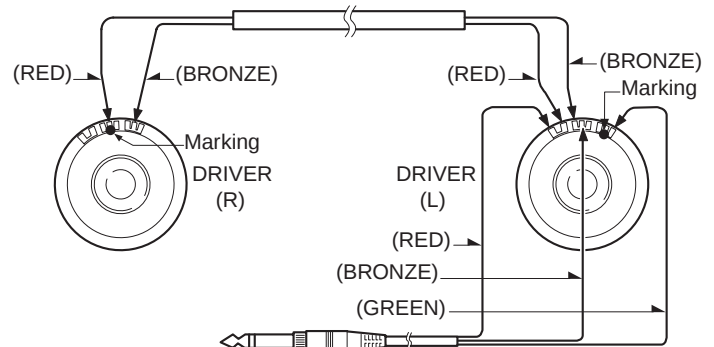

Features

- Monitoring headphones for DJ and remix use
- Swivel earcup with automatic position recovery mechanism allows easy single sided monitoring on shoulders
- Resists high power audio input up to 3W
- 50 mm driver unit for high quality sound
- Neodymium magnet for powerful bass and clear treble sound
- Coiled LC-OFC litz cord for high conductivity
- Screw type gold plated stereo unimatch plug for secure connection
- Convenient folding design

ACCESSORIES

Ref. No.	Part No.	Description	Remarks
ACCESSORIES & PACKING MATERIALS			

4-218-130-01		CASE, SOFT	
3-866-560-11		MANUAL, INSTRUCTION (ENGLISH/FRENCH/GERMAN/SPANISH/ ITALIAN/PORTUGUESE/RESSIAN)	

STEREO HEADPHONES

SONY®


9-926-946-12
2003F16-1
© 2003.06

Sony Corporation
Personal Audio Company
Published by Sony Engineering Corporation

EXPLODED VIEW

NOTE:

- -XX, -X mean standardized parts, so they may have some differences from the original one.
- The mechanical parts with no reference number in the exploded views are not supplied.

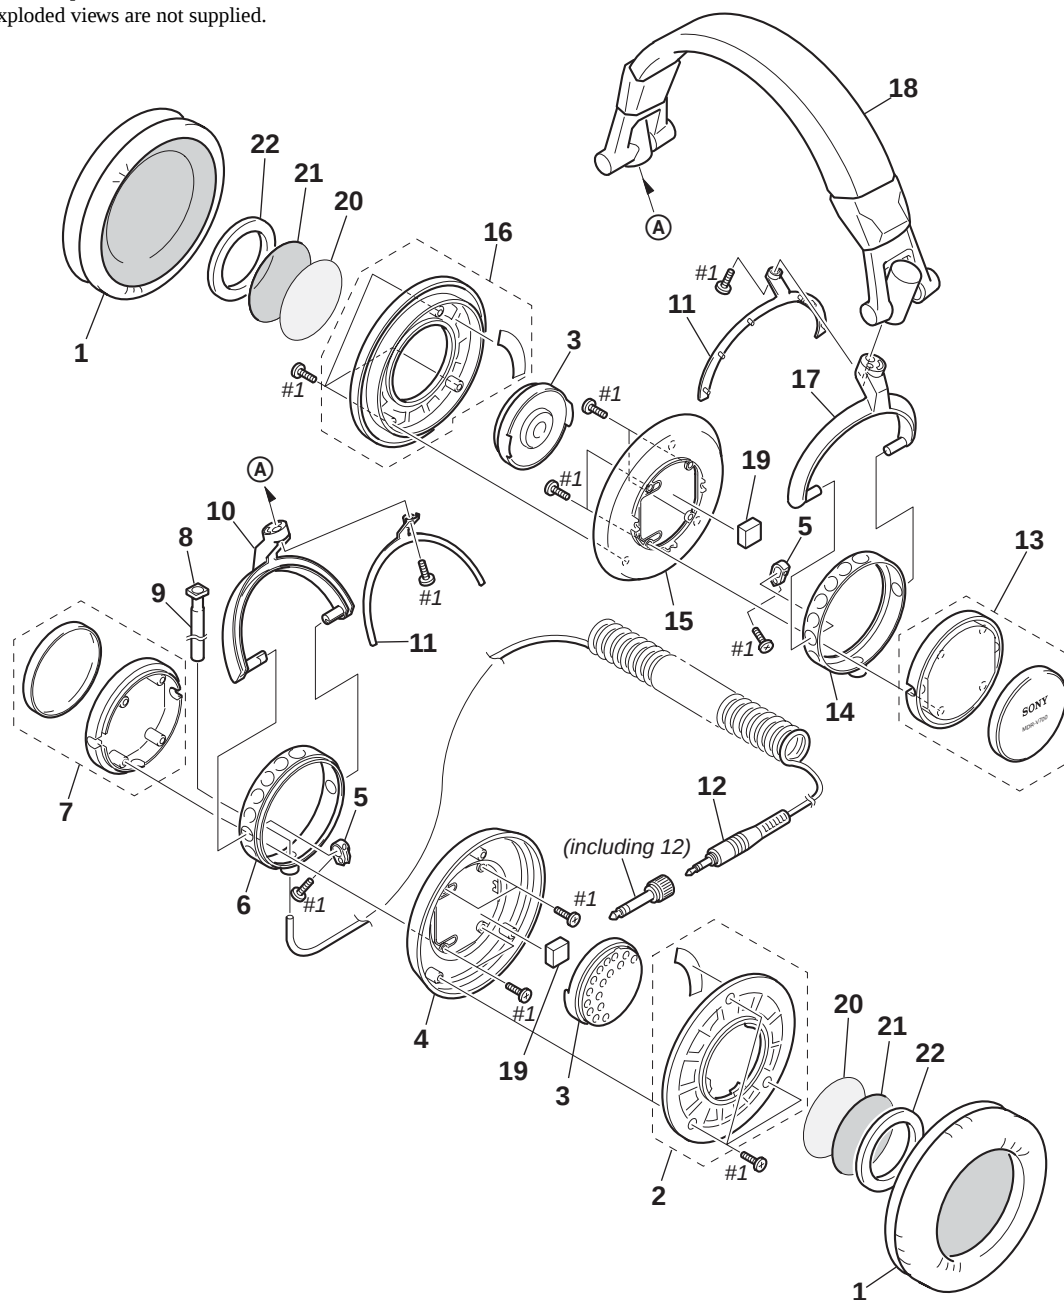

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
1	4-218-140-01	PAD, EAR		13	X-4951-699-1	HOUSING (R) ASSY	
2	X-4951-694-1	PLATE (L) FRONT ASSY		14	4-218-136-01	RING, HOUSING (R)	
3	1-542-390-11	DRIVER (HEADPHONE) (050F025)		15	X-4951-697-1	FLANGE (R) ASSY	
4	X-4951-696-1	FLANGE (L) ASSY		16	X-4951-695-1	PLATE (R) FRONT ASSY	
5	4-954-017-01	CAM, HANGER		17	4-218-142-01	HANGER (R)	
6	4-218-135-01	RING, HOUSING (L)		18	X-4951-652-1	HEAD BAND ASSY	
7	X-4951-698-1	HOUSING (L) ASSY		19	4-220-391-01	AB SORBENT, ACOUSTIC	
8	3-671-893-00	CLAMP (LOW TYPE)		20	4-220-392-01	EQUALIZER	
9	4-218-139-01	BUSHING		21	4-219-368-01	URETHANE, FRONT	
10	4-218-141-01	HANGER (L)		22	4-219-367-01	RING, URETHANE	
11	4-218-143-01	LID, HANGER		#1	7-685-132-19	SCREW +P (2.6 × 5) TYPE2 NON-SLIT	
12	1-790-644-11	CORD (WITH PLUG)					

MEMO

REVISION HISTORY

Clicking the version allows you to jump to the revised page.

Also, clicking the version at the upper right on the revised page allows you to jump to the next revised page.

[illegible]