



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Model No.

B-2490

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com



ADA Compliant

This Space for Architect/Engineer Approval

Job Name _____ Date _____


Model Specified _____ Quantity _____

Customer/Wholesaler _____

Contractor _____

Architect/Engineer _____

Ø 2 1/4"
[57mm]
Base



Push Button Metering Cartridge
w/ Blank Push Button Cap

B-0199-03
2.2 GPM Aerator

1 5/16"
[34mm]

Mounting Surface

4 1/16"
[103mm]

4 11/16"
[119mm]

5 5/16"
[136mm]

Temperature Mixing Valve
w/ Integral Check Valves

3/8" Compression Female Inlets
w/ 18" Flexible Stainless Steel
Supply Hoses



Spanner Bit for
Access to Metering
Adjustment Included.
(Metering Adjustment
Requires 3/32" Hex Key)



Rough-In Requirement:
Ø 1 1/8" [29mm] Mounting Hole

Product Specifications:

Single Hole Single Temperature Deck Mount Basin Faucet, Push Button Metering Cartridge, 2.2 GPM Aerator, Temperature Control Mixing Valve w/ Integral Check Valves & 18" Flexible Stainless Steel Supply Hoses w/ 3/8" Compression Female Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)



T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Model No.

B-2490

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

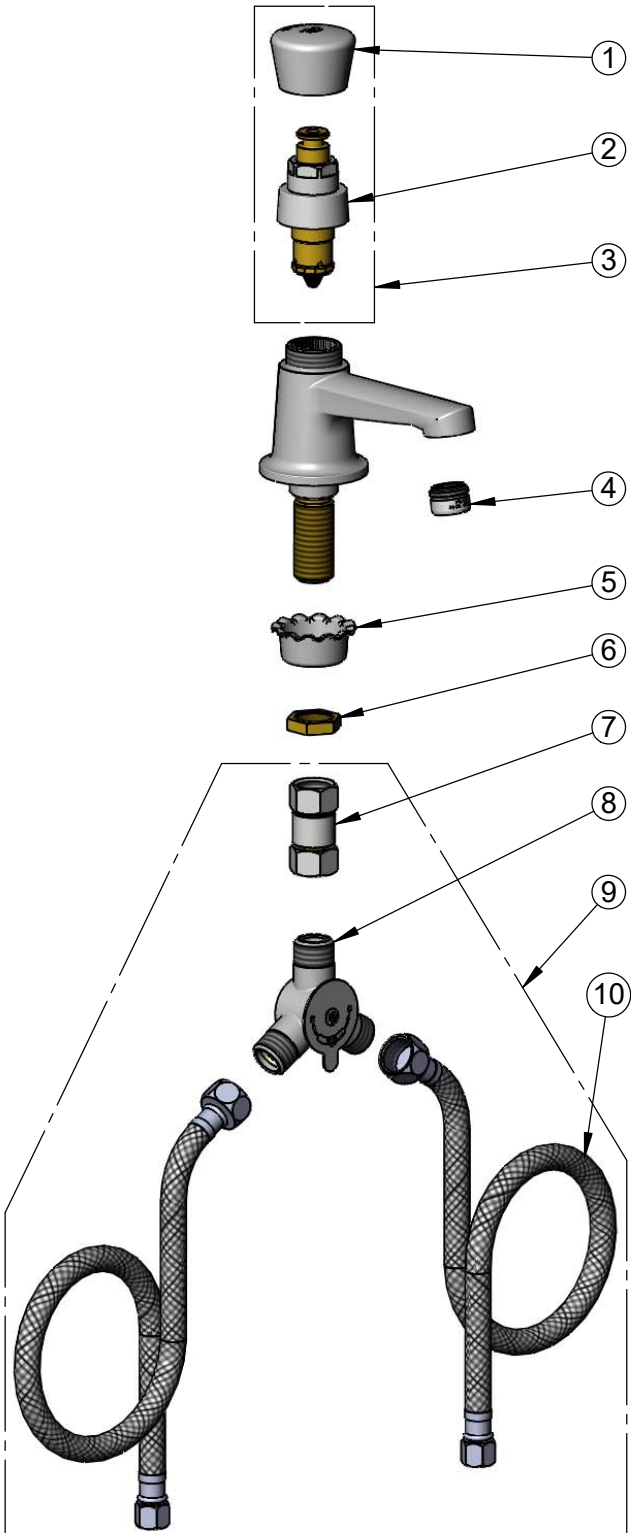

ITEM NO.	SALES NO.	DESCRIPTION
1	014193-40	Blank Push Button Cap
2	238A	Push Button Metering Cartridge
3	238AB	Push Button Metering Cartridge w/ Push Button Cap
4	B-0199-03	2.2 GPM Aerator
5	001000-45	Rosette Washer
6	002954-45	Shank Lock Nut
7	017506-45	1/2" NPSM Swivel Coupling
8	5EF-0006	Mechanical, Mixing Valve
9	019806-40	Temperature Control Mixing Valve w/ Flexible 3/8" Compression Female Inlets
10	5EF-0005	Supply Hose, 9/16-24 Female x 1/2" NPSM



014734-45
#8 Spanner Bit

Product Specifications:

Single Hole Single Temperature Deck Mount Basin Faucet, Push Button Metering Cartridge, 2.2 GPM Aerator, Temperature Control Mixing Valve w/ Integral Check Valves & 18" Flexible Stainless Steel Supply Hoses w/ 3/8" Compression Female Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)